




B

C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-03-30	李国常

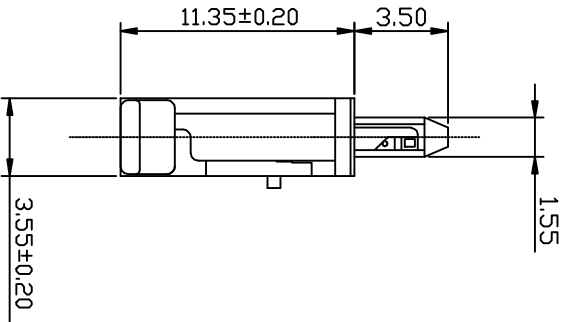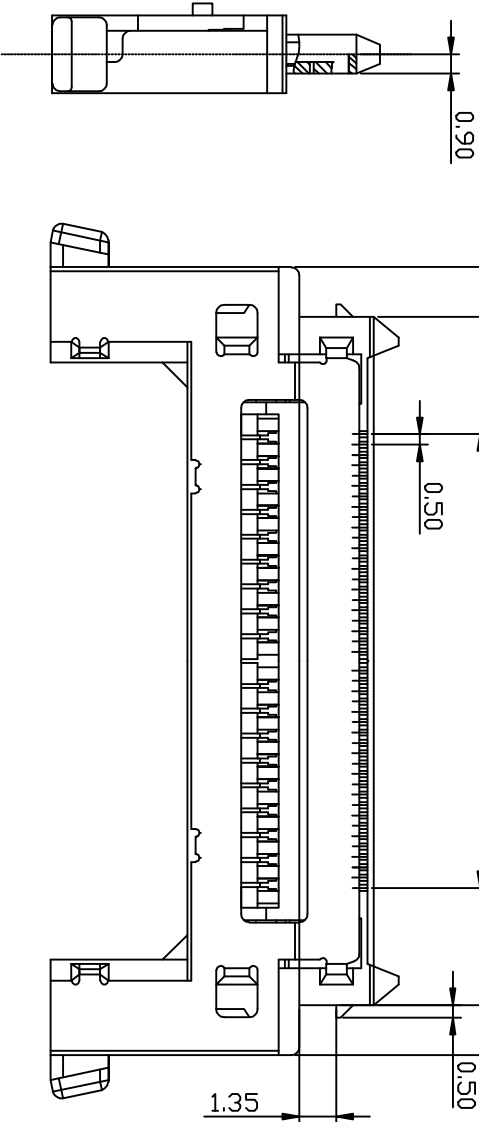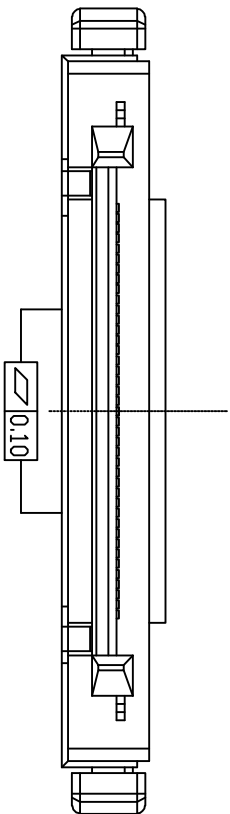

- SPECIFICATIONS**
- Voltage rating: 100V AC, DC
 - Current rating: 0.7A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max

- HOUSING**
- Part No: H0505-NP
 - Poles: 20-50
 - Material: Nylon 46 UL 94V-0

Part NO	Dimensions (mm)		
	A	B	C
H0505-20	10.00	17.60	21.25
H0505-30	15.00	22.60	26.25
H0505-40	20.00	27.60	31.25
H0505-50	25.00	32.60	36.25

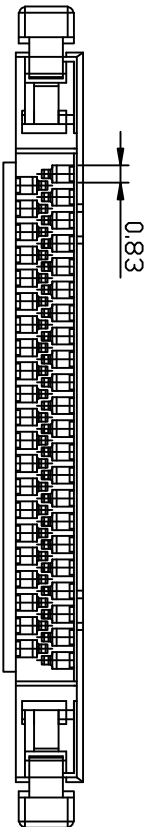

深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

•0±0.25

•000±0.015

TITLE	成品规格图				
CHECKED BY	DATE	SCALE			
	2016-03-30	1:1	VER No	SIZE	

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART NO	H0505-NP
-----	---------	----------

4

4

B

C

D

E

F