



B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-08	李国常

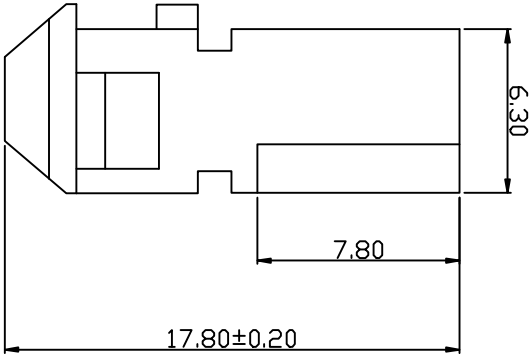
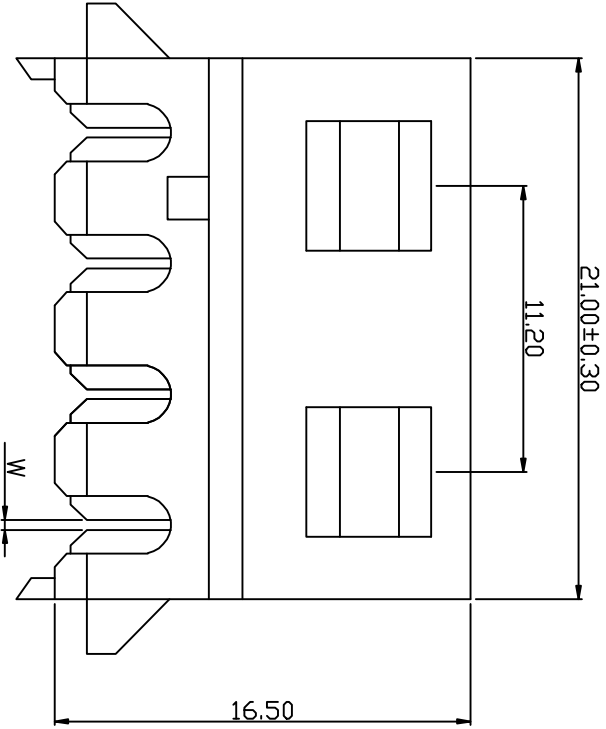


SPECIFICATIONS



- Voltage rating: 250V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+105℃
- Contact resistance: 10MΩ max

HOUSING

- Part No: F5081T-18#
- Material: Nylon 66 UL94V-2
- Pin Material: Brass / Tin-plated

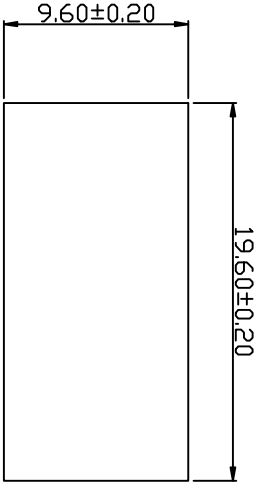


F5081GV

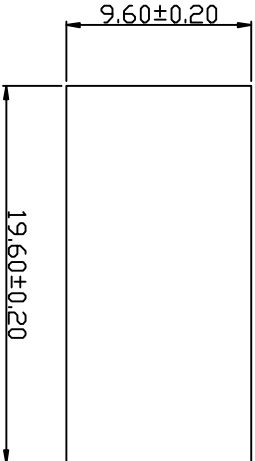

F5081GR

F5081GV	180° CAP
F5081GR	90° CAP
F5081T-04-18#	W=0.58 Wire:18#
F5081T-04-20#	W=0.54 Wire:20#-22#

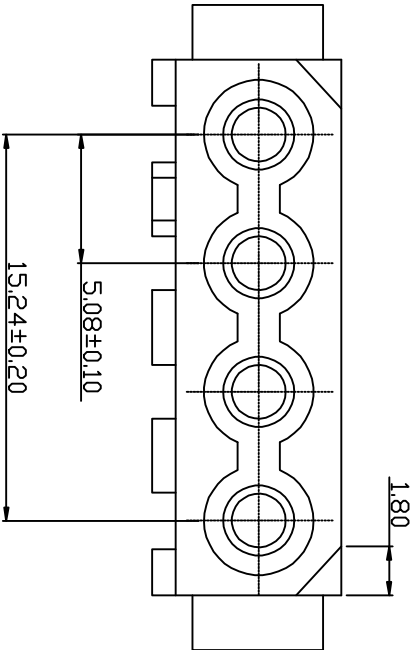

深圳市康利通电子科技有限公司

成品规格图			TOLERANCE		
TITLE			0±0.30		
CHECKED BY	DATE	SCALE	.00±0.25		
	2016-06-08	1:1	.000±0.015		
DRAWN BY	UNIT:mm		VER No	SIZE	
李国常	PART No	F5081T-04			

B

C

D

E

F