

B

C

E

公差表





REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-02	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

WAFER

- Part No: W4202SR-2*NP
- Poles: 02-24
- Material: Nylon 66 UL94V-2
- Pin Material: Brass /Tin-plated

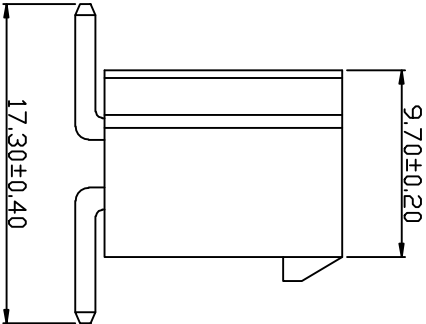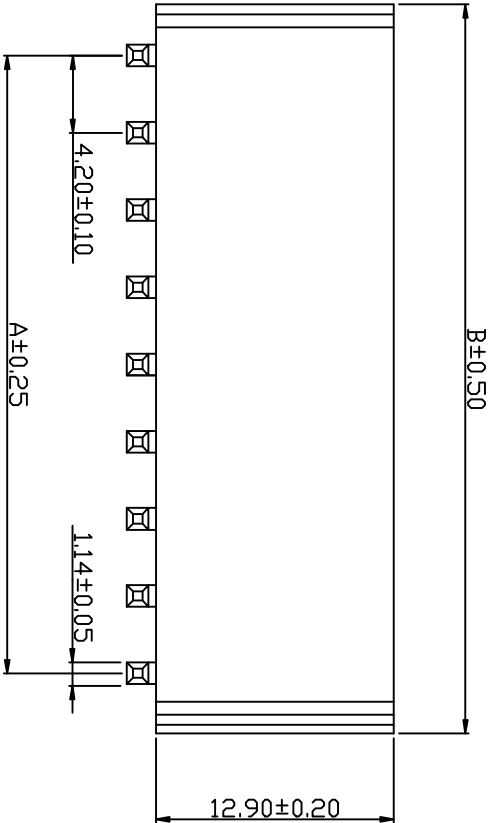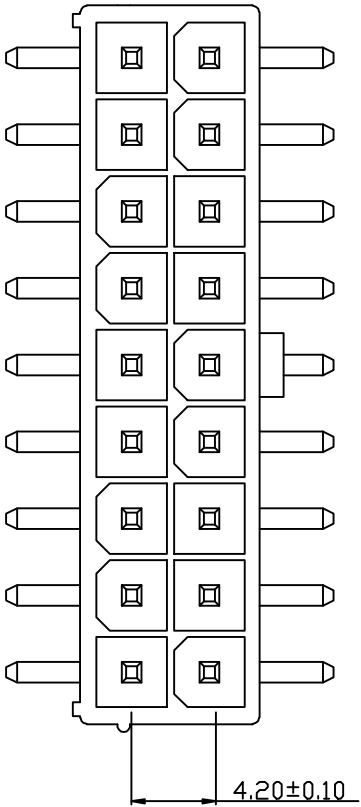

Part No	Dimensions (mm)	
	A	B
W4202SR-2*01	—	5.60
W4202SR-2*02	4.20	9.80
W4202SR-2*03	8.40	14.00
W4202SR-2*04	12.60	18.20
W4202SR-2*05	16.80	22.40
W4202SR-2*06	21.00	26.60
W4202SR-2*07	25.20	30.80
W4202SR-2*08	29.40	35.00
W4202SR-2*09	33.60	39.20
W4202SR-2*10	37.80	43.40
W4202SR-2*11	42.00	47.60
W4202SR-2*12	46.20	51.80



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		VER No		SIZE	
CHECKED BY	DATE	SCALE	1:1		A	
DRAWN BY	UNIT:mm			A		A4

李国常	PART No	W4202SR-2*NP
-----	---------	--------------

4

4

B

C

D

E

F