

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-21	李国常

**SPECIFICATIONS**


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

**HOUSING**

- Part No: F2548-NP
- Poles: 02-16
- Material: Nylon 66 UL94V-0

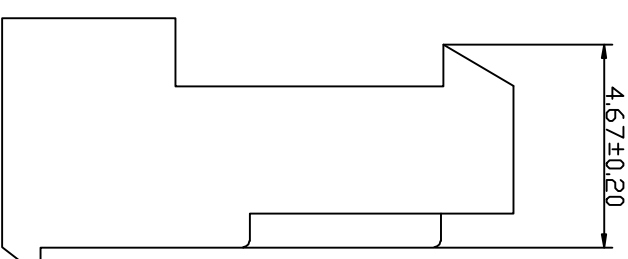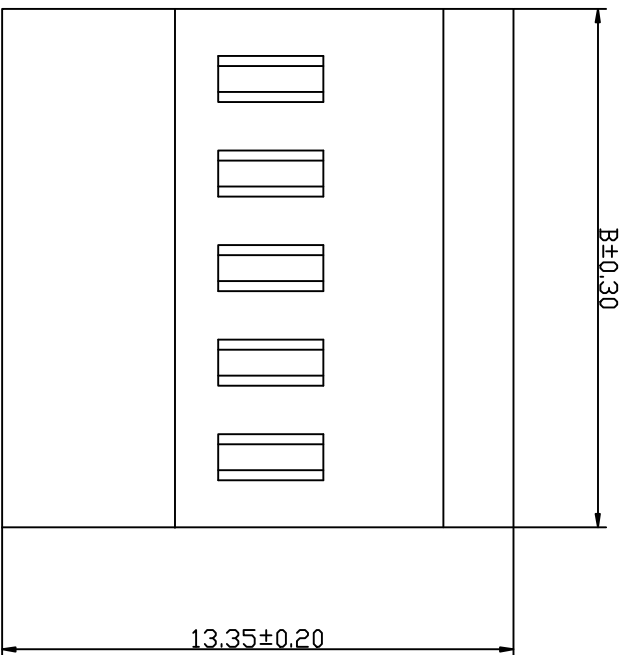

Part No	Dimensions (mm)	
	A	B
F2548-02	2.54	5.08
F2548-03	5.08	7.62
F2548-04	7.62	10.06
F2548-05	10.06	12.70
F2548-06	12.70	15.24
F2548-07	15.24	17.78
F2548-08	17.78	20.32
F2548-09	20.32	22.86
F2548-10	22.86	25.40
F2548-11	25.40	27.94
F2548-12	27.94	30.48
F2548-13	30.48	33.02
F2548-14	33.02	35.56
F2548-15	35.56	38.10
F2548-16	38.10	40.64

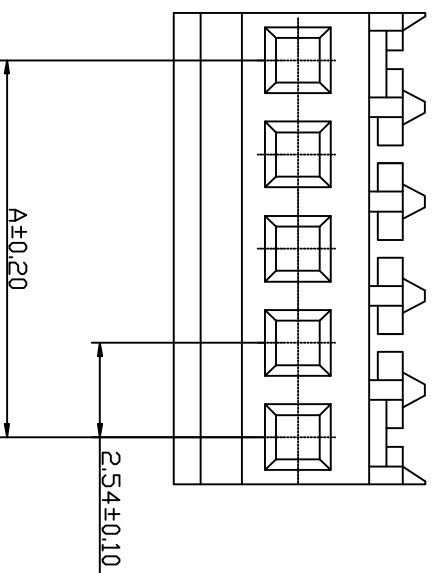

**KLT** 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-05-21	1:1	A	A4
DRAWN BY	UNIT:mm			
PART No	F2548-NP			
李国常				

4

4

B

C

D

E

F

1

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-21	李国常

**SPECIFICATIONS**


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

**HOUSING**

- Part No: F2548T-NP
- Poles: 02-16
- Material: Nylon 66 UL94V-0

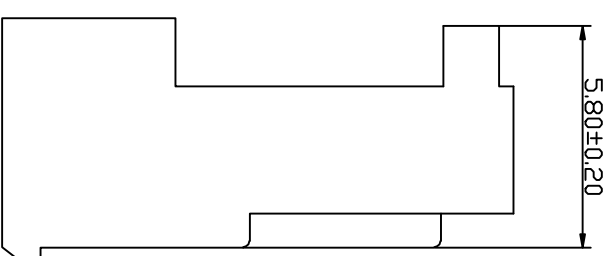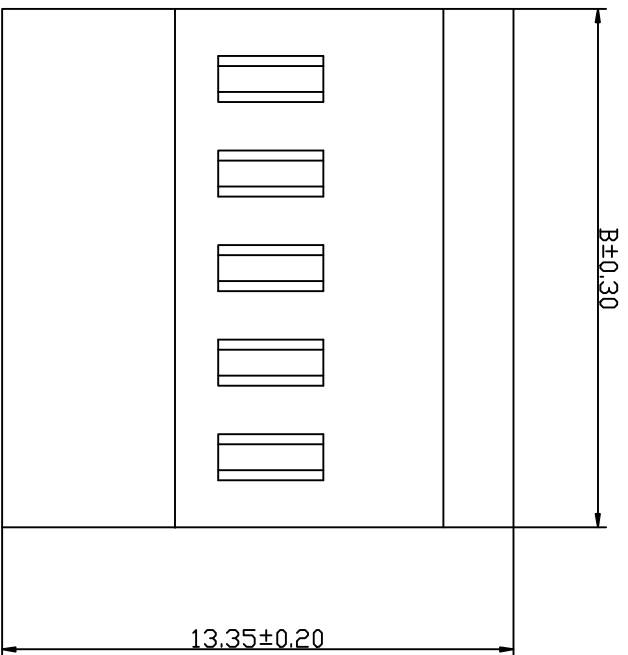

Part No	Dimensions (mm)	
	A	B
F2548T-02	2.54	5.08
F2548T-03	5.08	7.62
F2548T-04	7.62	10.06
F2548T-05	10.06	12.70
F2548T-06	12.70	15.24
F2548T-07	15.24	17.78
F2548T-08	17.78	20.32
F2548T-09	20.32	22.86
F2548T-10	22.86	25.40
F2548T-11	25.40	27.94
F2548T-12	27.94	30.48
F2548T-13	30.48	33.02
F2548T-14	33.02	35.56
F2548T-15	35.56	38.10
F2548T-16	38.10	40.64

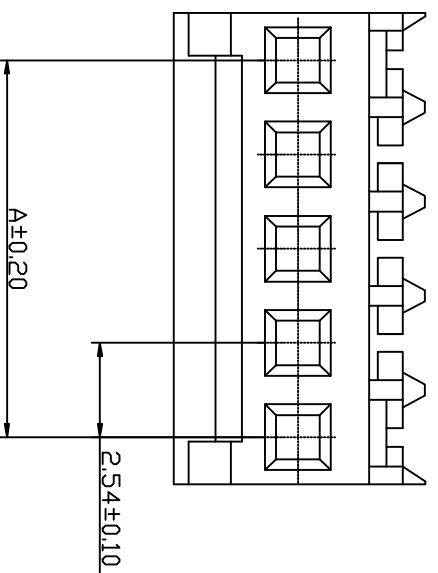

**KLT** 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-05-21	1:1	A	A4
DRAWN BY	UNIT:mm			
PART No	F2548T-NP			
李国常				

4

4

B

C

D

E

F

1

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-21	李国常

■ SPECIFICATIONS




- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

■ HOUSING

- Part No: F2548GV-NP
- Poles: 02-16
- Material: Nylon 66 UL94V-2

4

4

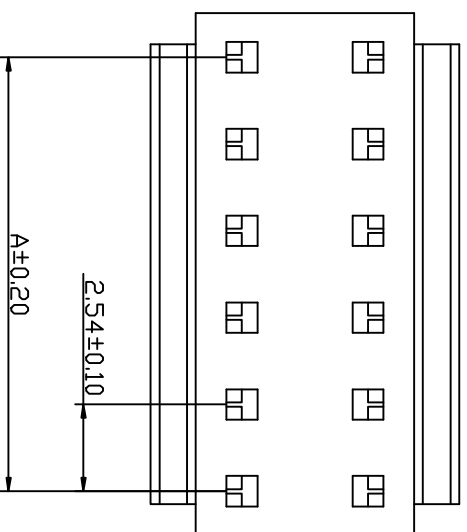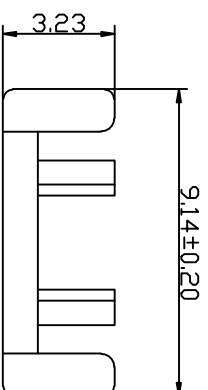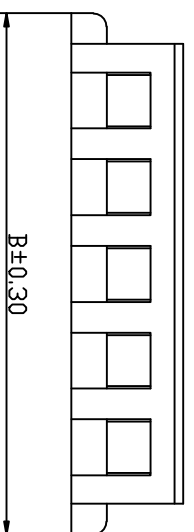

Part No	Dimensions (mm)	
	A	B
F2548GV-02	2.54	5.08
F2548GV-03	5.08	7.62
F2548GV-04	7.62	10.06
F2548GV-05	10.06	12.70
F2548GV-06	12.70	15.24
F2548GV-07	15.24	17.78
F2548GV-08	17.78	20.32
F2548GV-09	20.32	22.86
F2548GV-10	22.86	25.40
F2548GV-11	25.40	27.94
F2548GV-12	27.94	30.48
F2548GV-13	30.48	33.02
F2548GV-14	33.02	35.56
F2548GV-15	35.56	38.10
F2548GV-16	38.10	40.64

**KLT** 深圳市康利通电子科技有限公司

成品规格图

Tolerance

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	成品规格图		Tolerance	
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-05-21	1:1	A	A4
DRAWN BY	UNIT:mm			
李国常	PART No	F2548GV-NP		

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-21	李国常

**SPECIFICATIONS**



- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

**HOUSING**


- Part No: F2548GR-NP
- Poles: 02-16
- Material: Nylon 66 UL94V-2


4


4

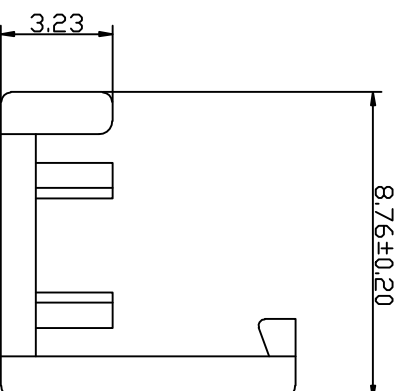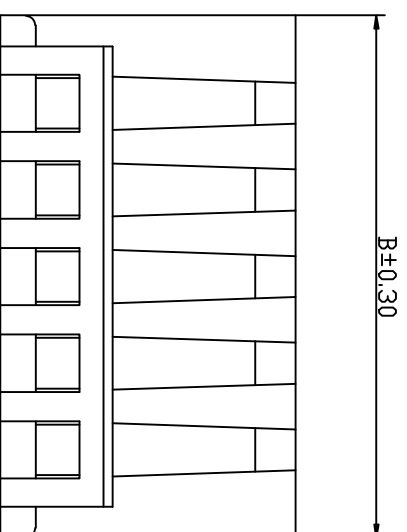

Part No	Dimensions (mm)	
	A	B
F2548GR-02	2.54	5.08
F2548GR-03	5.08	7.62
F2548GR-04	7.62	10.06
F2548GR-05	10.06	12.70
F2548GR-06	12.70	15.24
F2548GR-07	15.24	17.78
F2548GR-08	17.78	20.32
F2548GR-09	20.32	22.86
F2548GR-10	22.86	25.40
F2548GR-11	25.40	27.94
F2548GR-12	27.94	30.48
F2548GR-13	30.48	33.02
F2548GR-14	33.02	35.56
F2548GR-15	35.56	38.10
F2548GR-16	38.10	40.64

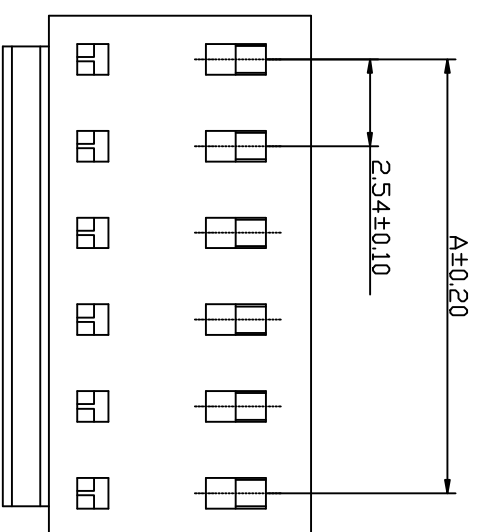

 <b>深圳市康利通电子科技有限公司</b>		TOLERANCE	
		0±0.30	

TITLE	成品规格图		TOLERANCE	
CHECKED BY	DATE	SCALE	.00±0.25	
	2016-05-21	1:1	.000±0.015	
DRAWN BY	UNIT:mm		VER No	SIZE
李国常	PART No		A	A4
		F2548GR-NP		

1

B

C

D

E

F