

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-25	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W2545V-NP
- Poles: 02-20
- Material: Nylon 66 UL94V-2
- Pin Material: Brass /Gold-flash

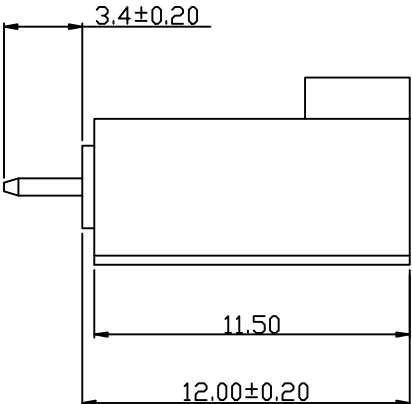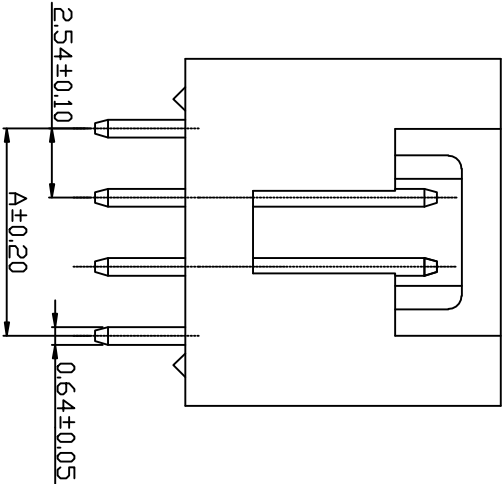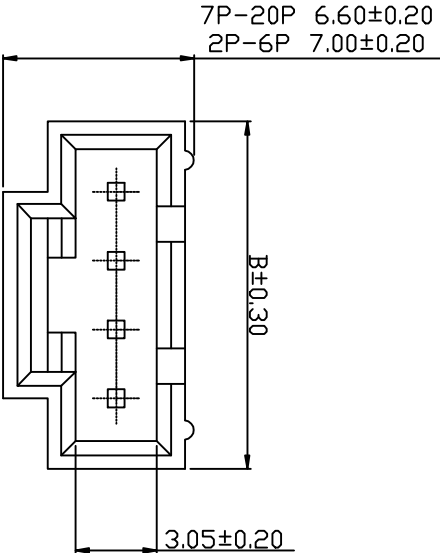

Part No	Dimensions (mm)	
	A	B
W2545V-02	254	7.62
W2545V-03	508	10.16
W2545V-04	7.62	12.70
W2545V-05	10.16	15.24
W2545V-06	12.70	17.78
W2545V-07	15.24	20.32
W2545V-08	17.78	22.86
W2545V-09	20.32	25.40
W2545V-10	22.86	27.94
W2545V-11	25.40	30.48
W2545V-12	27.94	33.02
W2545V-13	30.48	35.56
W2545V-14	33.02	38.10
W2545V-15	35.56	40.64
W2545V-16	38.10	43.18
W2545V-17	40.64	45.72
W2545V-18	43.18	48.26
W2545V-19	45.72	50.80
W2545V-20	48.26	53.34



P.C.B LAYOUT



深圳市康利通电子科技有限公司

T O C E R A N C E

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No SIZE

A

A4

李国常

PART No

W2545V-NP

4

4

B

C

D

E

F

B


C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-25	李国常

4

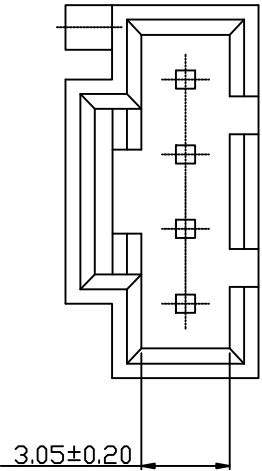



4

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W2545VD-NP
- Poles: 02-20
- Material: Nylon 66 UL94V-2
- Pin Material: Brass /Gold-flash

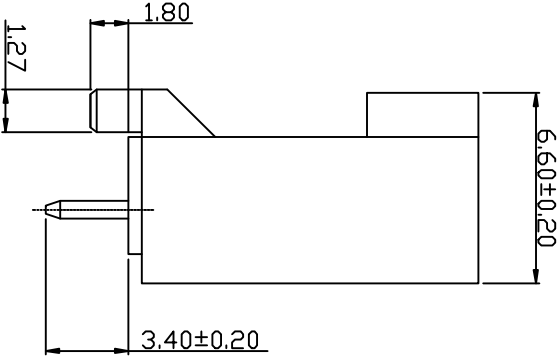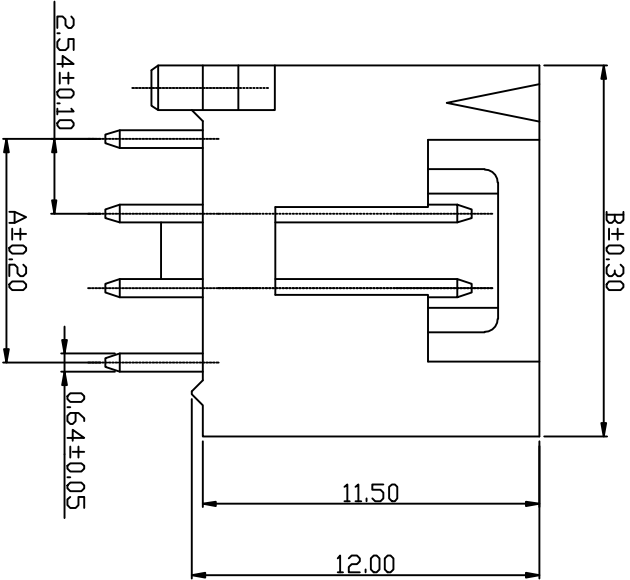

Part No	Dimensions (mm)	
	A	B
W2545VD-02	2.54	7.62
W2545VD-03	5.08	10.16
W2545VD-04	7.62	12.70
W2545VD-05	10.16	15.24
W2545VD-06	12.70	17.78
W2545VD-07	15.24	20.32
W2545VD-08	17.78	22.86
W2545VD-09	20.32	25.40
W2545VD-10	22.86	27.94
W2545VD-11	25.40	30.48
W2545VD-12	27.94	33.02
W2545VD-13	30.48	35.56
W2545VD-14	33.02	38.10
W2545VD-15	35.56	40.64
W2545VD-16	38.10	43.18
W2545VD-17	40.64	45.72
W2545VD-18	43.18	48.26
W2545VD-19	45.72	50.80
W2545VD-20	48.26	53.34

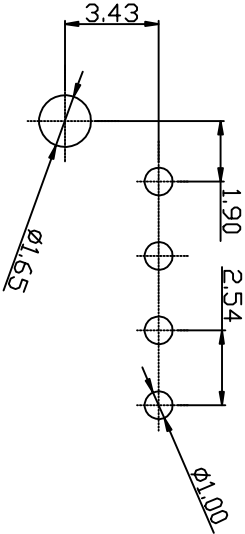

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T O C E R A N C E

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

T I T L E

成品规格图

C H E C K E D B Y

D A T E

S C A L E

2016-05-25

1:1

V E R N o

S I Z E

D R A W N B Y

U N I T : m m



A

A 4

李国常

P A R T N o

W 2 5 4 5 V D - N P

B

C

D

E

F




B

C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-25	李国常

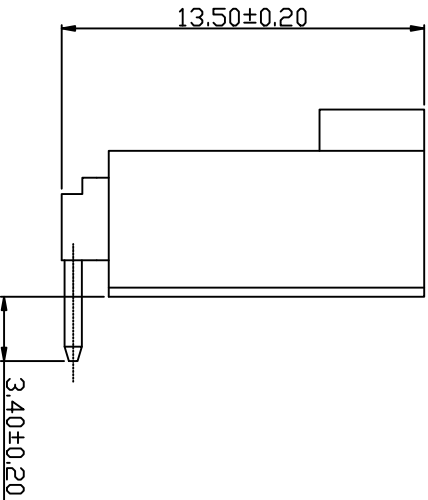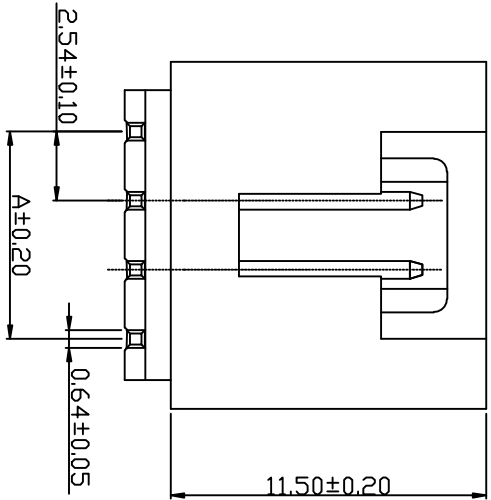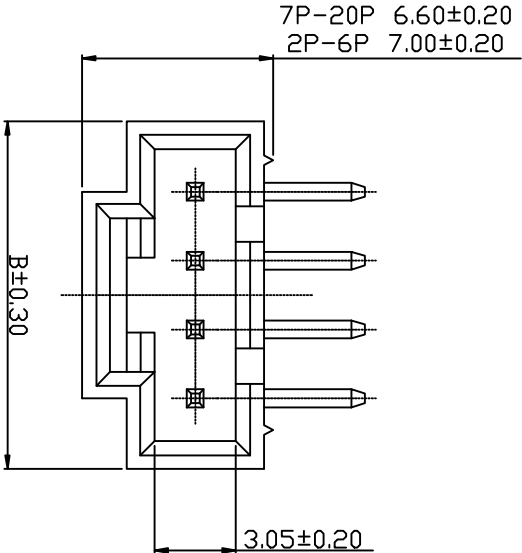

Part No	Dimensions (mm)	
	A	B
W2545R-02	254	7.62
W2545R-03	5.08	10.16
W2545R-04	7.62	12.70
W2545R-05	10.16	15.24
W2545R-06	12.70	17.78
W2545R-07	15.24	20.32
W2545R-08	17.78	22.86
W2545R-09	20.32	25.40
W2545R-10	22.86	27.94
W2545R-11	25.40	30.48
W2545R-12	27.94	33.02
W2545R-13	30.48	35.56
W2545R-14	33.02	38.10
W2545R-15	35.56	40.64
W2545R-16	38.10	43.18
W2545R-17	40.64	45.72
W2545R-18	43.18	48.26
W2545R-19	45.72	50.80
W2545R-20	48.26	53.34

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max

- WAFER**
- Part No: W2545R-NP
 - Poles: 02-20
 - Material: Nylon 66 UL94V-2
 - Pin Material: Brass /Gold-flash



P.C.B LAYOUT



深圳市康利通电子科技有限公司

T O C E R A N C E

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No

SIZE

A

A4

李国常

PART No

W2545R-NP

4

4

B

C

D

E

F