

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常

SPECIFICATIONS




- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

HOUSING

- Part No: H2505-NP
- Poles: 02-16
- Material: Nylon 66 UL94V-0

Part No	Dimensions (mm)	
	A	B
H2505-02	2.50	5.80
H2505-03	5.00	8.30
H2505-04	7.50	10.80
H2505-05	10.00	13.30
H2505-06	12.50	15.80
H2505-07	15.00	18.30
H2505-08	17.50	20.80
H2505-09	20.00	23.30
H2505-10	22.50	25.80
H2505-11	25.00	28.30
H2505-12	27.50	30.80
H2505-13	30.00	33.30
H2505-14	32.50	35.80
H2505-15	35.00	38.30
H2505-16	37.50	40.80

4

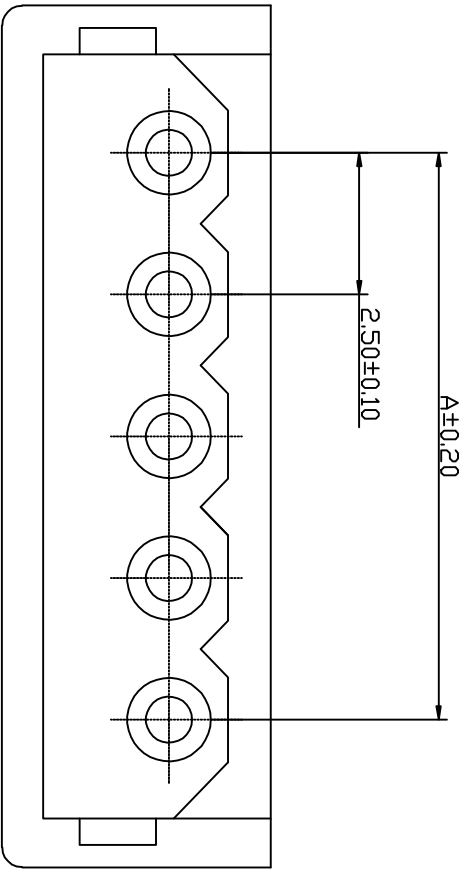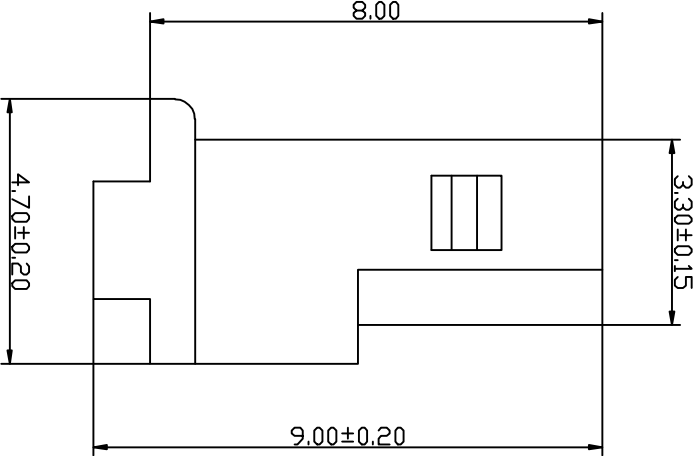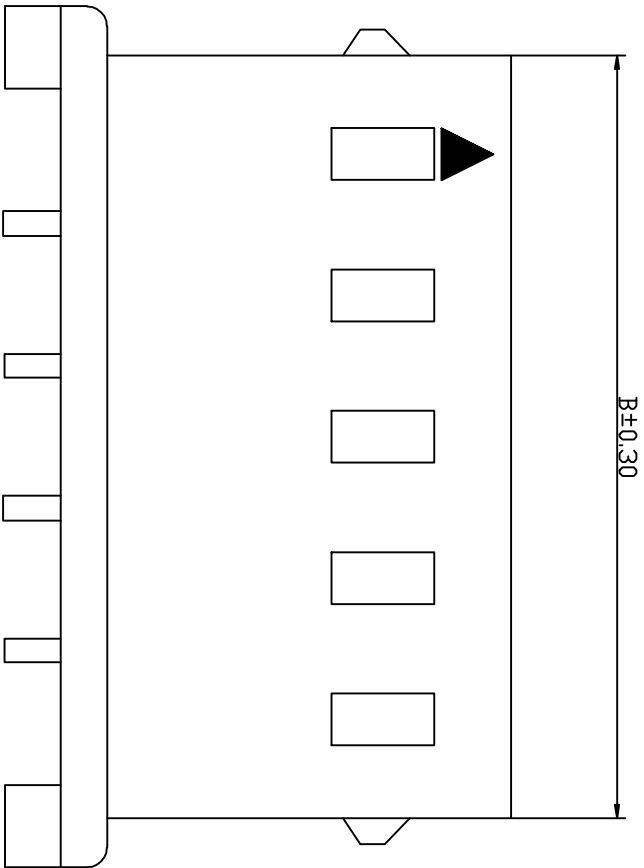

4

1



深圳市康利通电子科技有限公司


TOLERANCE

0±0.30

• 0±0.25

• 0.00±0.20

• 0.000±0.015

CHECKED BY		DATE		SCALE		.000±0.015	
		2016-05-16		1:1		VER No	SIZE
DRAWN BY	UNIT:mm			A	A4		
李国常	PART No	H2505-NP					

B

C

D

E

F

B

C

E

公差表






REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

HOUSING

- Part No: H2506-NP
- Poles: 02-16
- Material: Nylon 66 UL94V-0

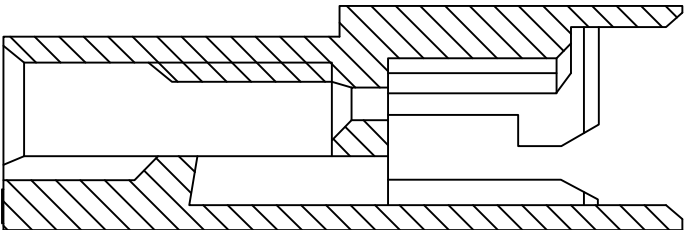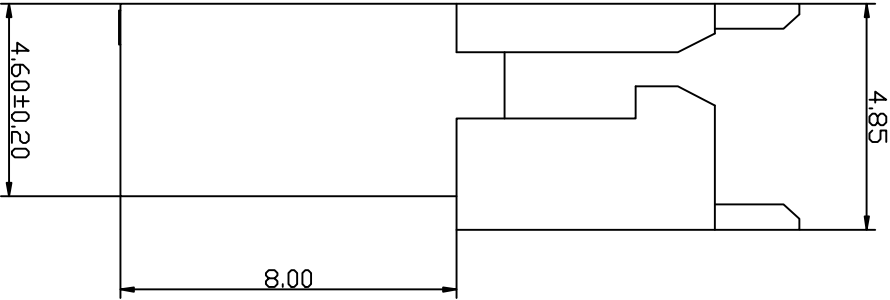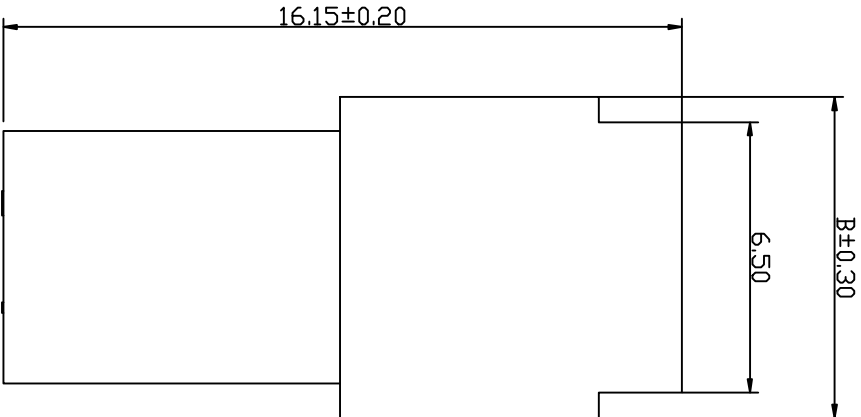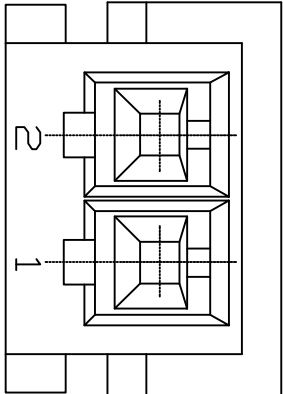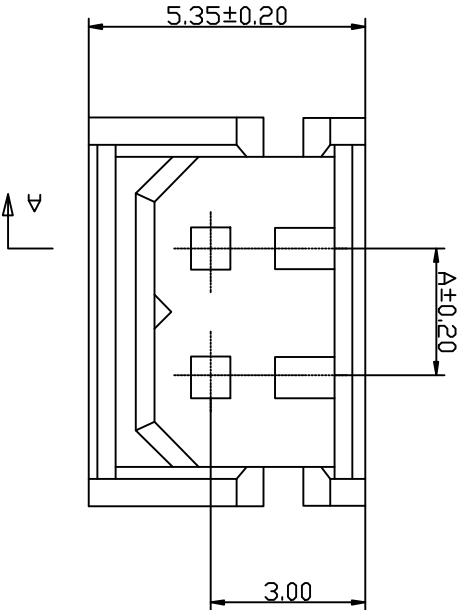

SECTION A-A

Part No	Dimensions (mm)	
	A	B
H2506-02	2.50	7.55
H2506-03	5.00	10.05
H2506-04	7.50	12.55
H2506-05	10.00	15.05
H2506-06	12.50	17.55
H2506-07	15.00	20.05
H2506-08	17.50	22.55
H2506-09	20.00	25.05
H2506-10	22.50	27.55
H2506-11	25.00	30.05
H2506-12	27.50	32.55
H2506-13	30.00	35.05
H2506-14	32.50	37.55
H2506-15	35.00	40.05
H2506-16	37.50	42.55

 深圳市康利通电子科技有限公司		T O C E R A N C E			
T I T L E		成品规格图		0±0.30	
C H E C K E D B Y		D A T E		.00±0.25	
C H E C K E D B Y		S C A L E		.000±0.015	
D R A W N B Y		1:1		VER No	SIZE
D R A W N B Y		UNIT:mm		A	A4
李国常		P A R T N O		H2506-NP	

4

4

1

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

TERMINAL


- Part No: T2505PT
- Applicable wire: AWG#22-#28
- Material: Phosphor Bronze
- Finish: Tin plated

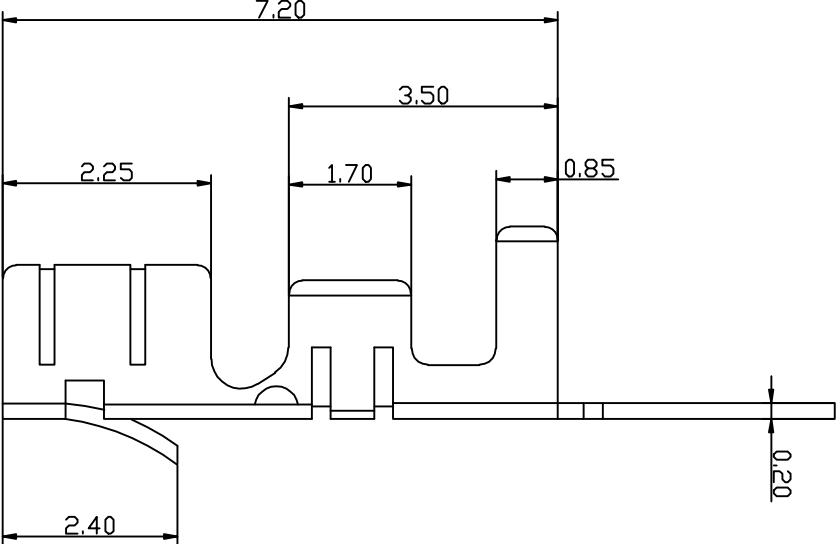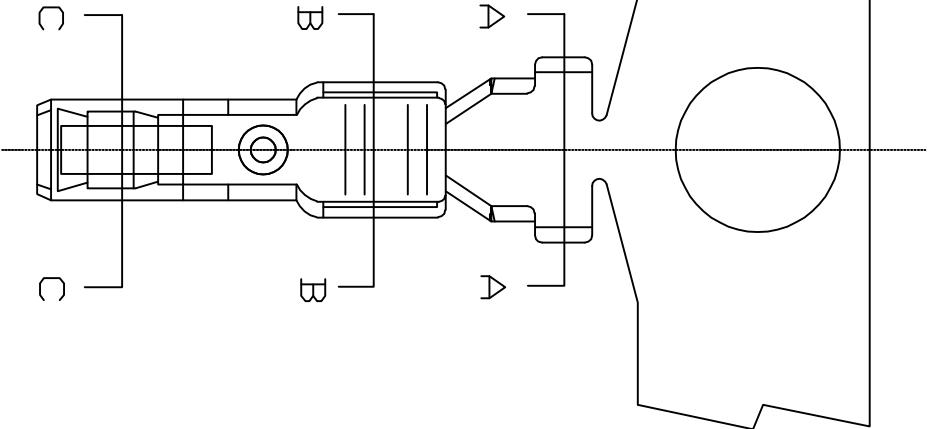

SEC: C-C



SEC: A-A



SEC: B-B



深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

成品规格图

TITLE

CHECKED BY

DATE

SCALE

2016-05-16


1:1

VER No

SIZE

DRAWN BY

UNIT:mm



A

A4

李国常

PART No

T2505PT

4

4

B

C

D

E

F

B

C

E

公差表






REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

TERMINAL

- Part No: T2506PT
- Applicable wire: AWG#22-#28
- Material: Phosphor Bronze
- Finish: Tin plated

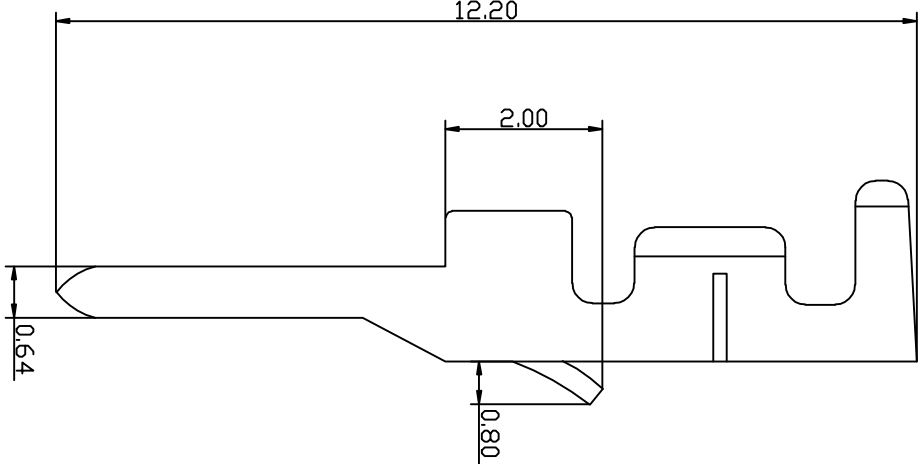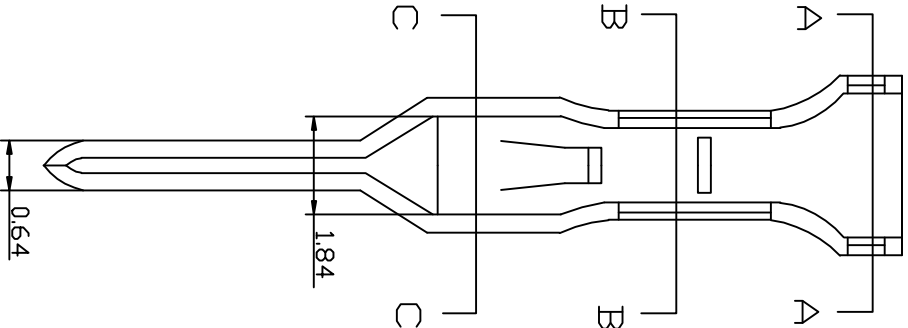

SEC: A-A

SEC: B-B

SEC: C-C



深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

成品规格图

TITLE

CHECKED BY

DATE

SCALE

2016-05-16


1:1

VER No

SIZE

DRAWN BY

UNIT:mm



A

A4

李国常

PART No

T2506PT

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W2506R-NP
- Poles: 02-16
- Material: Nylon 66 UL94V-0
- Pin Material: Brass /Tin-plated

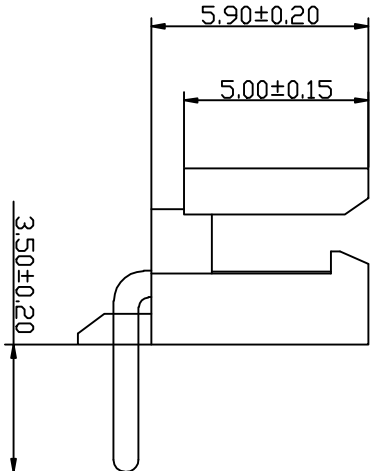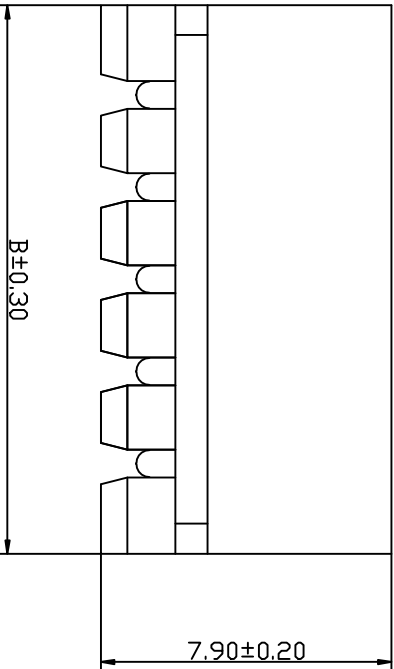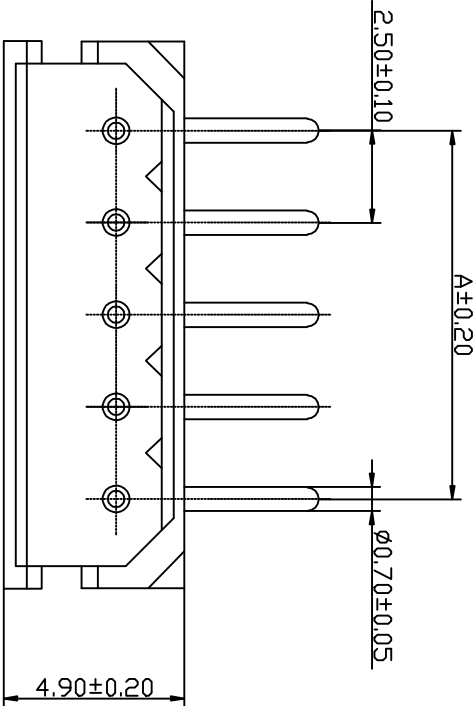

Part No	Dimensions (mm)	
	A	B
W2506R-02	2.50	7.50
W2506R-03	5.00	10.00
W2506R-04	7.50	12.50
W2506R-05	10.00	15.00
W2506R-06	12.50	17.50
W2506R-07	15.00	20.00
W2506R-08	17.50	22.50
W2506R-09	20.00	25.00
W2506R-10	22.50	27.50
W2506R-11	25.00	30.00
W2506R-12	27.50	32.50
W2506R-13	30.00	35.00
W2506R-14	32.50	37.50
W2506R-15	35.00	40.00
W2506R-16	37.50	42.50

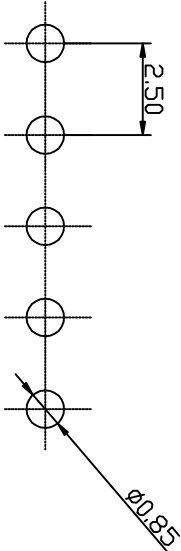

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T OCERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-05-16	1:1		

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART No	W2506R-NP
-----	---------	-----------

B

C

D

E

F




B

C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常

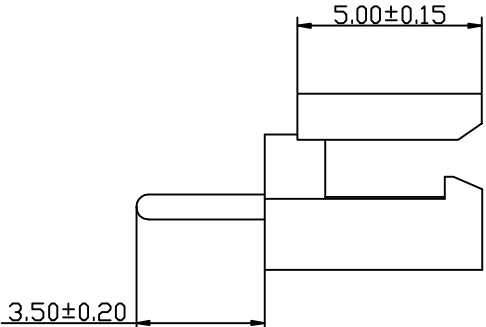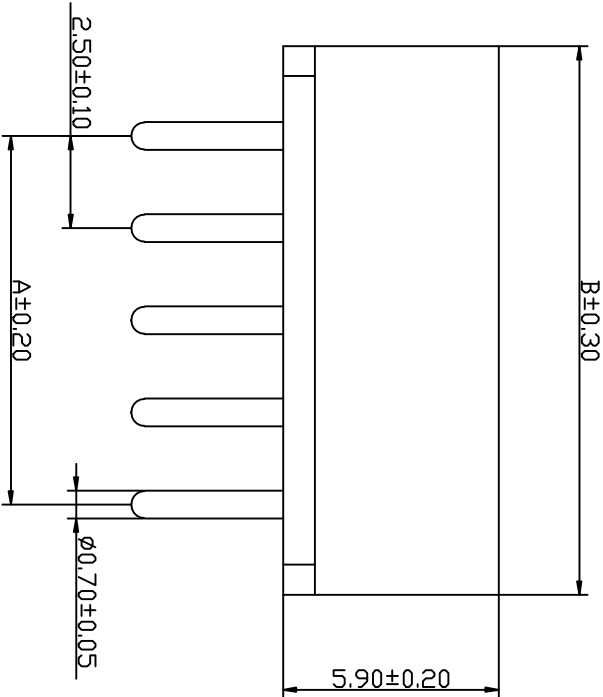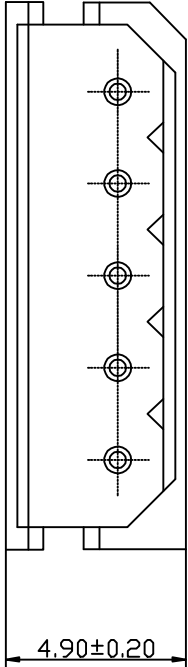

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max

- WAFER**
- Part No: W2506V-NP
 - Poles: 02-16
 - Material: Nylon 66 UL94V-0
 - Pin Material: Brass /Tin-plated

Part No	Dimensions (mm)	
	A	B
W2506V-02	2.50	7.50
W2506V-03	5.00	10.00
W2506V-04	7.50	12.50
W2506V-05	10.00	15.00
W2506V-06	12.50	17.50
W2506V-07	15.00	20.00
W2506V-08	17.50	22.50
W2506V-09	20.00	25.00
W2506V-10	22.50	27.50
W2506V-11	25.00	30.00
W2506V-12	27.50	32.50
W2506V-13	30.00	35.00
W2506V-14	32.50	37.50
W2506V-15	35.00	40.00
W2506V-16	37.50	42.50

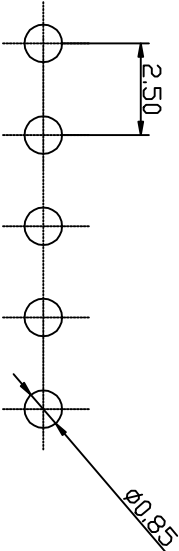

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T OCERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-05-16	1:1		

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART No	W2506V-NP
-----	---------	-----------

B

C

D

E

F