

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常




**SPECIFICATIONS**

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

**HOUSING**

- Part No: H2515-NP
- Poles: 02-20
- Material: Nylon 66 UL94V-0

4

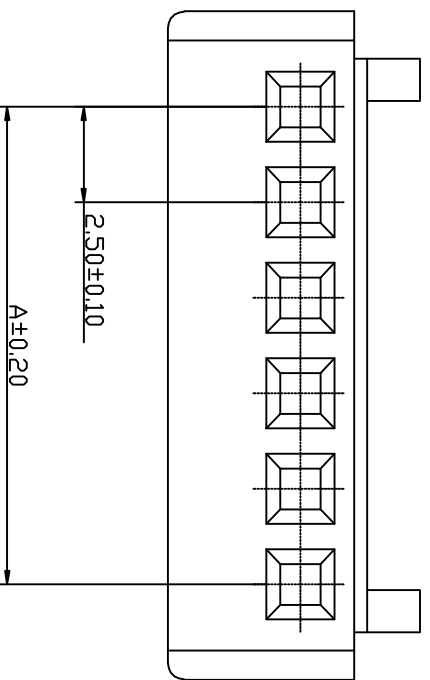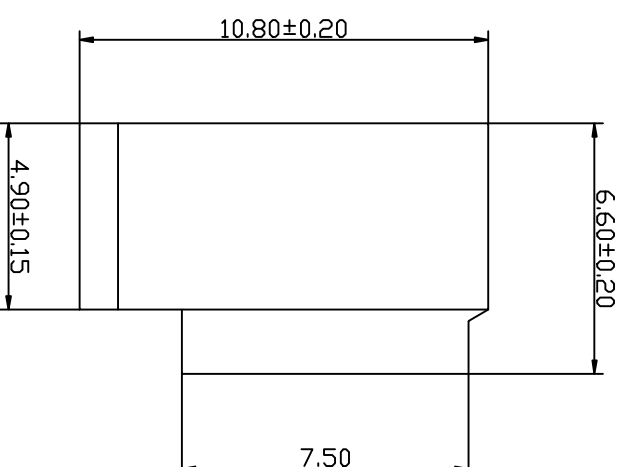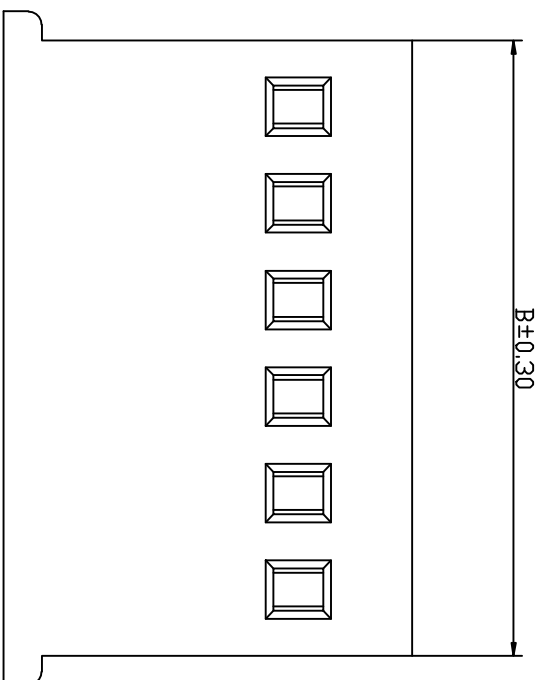

Part No	Dimensions (mm)	
	A	B
H2515-02	2.50	6.00
H2515-03	5.00	8.50
H2515-04	7.50	11.00
H2515-05	10.00	13.50
H2515-06	12.50	16.00
H2515-07	15.00	18.50
H2515-08	17.50	21.00
H2515-09	20.00	23.50
H2515-10	22.50	26.00
H2515-11	25.00	28.50
H2515-12	27.50	31.00
H2515-13	30.00	33.50
H2515-14	32.50	36.00
H2515-15	35.00	38.50
H2515-16	37.50	41.00
H2515-17	40.00	43.50
H2515-18	42.50	46.00
H2515-19	45.00	48.50
H2515-20	47.50	51.00

**KLT** 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

4

TITLE	成品规格图		TOLERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
DRAWN BY	UNIT:mm	1:1	A	A4
李国常	2016-05-16			
PART No	H2515-NP			

B

C

D

E

F

B



C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-16	李国常

4

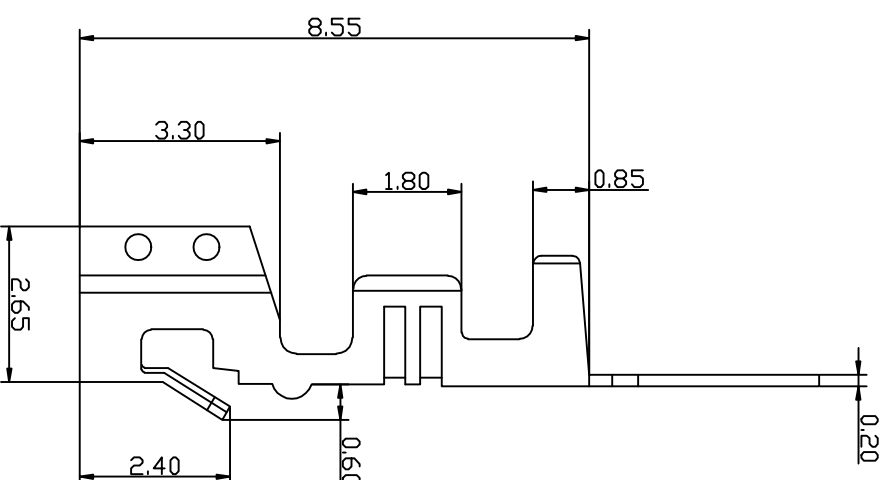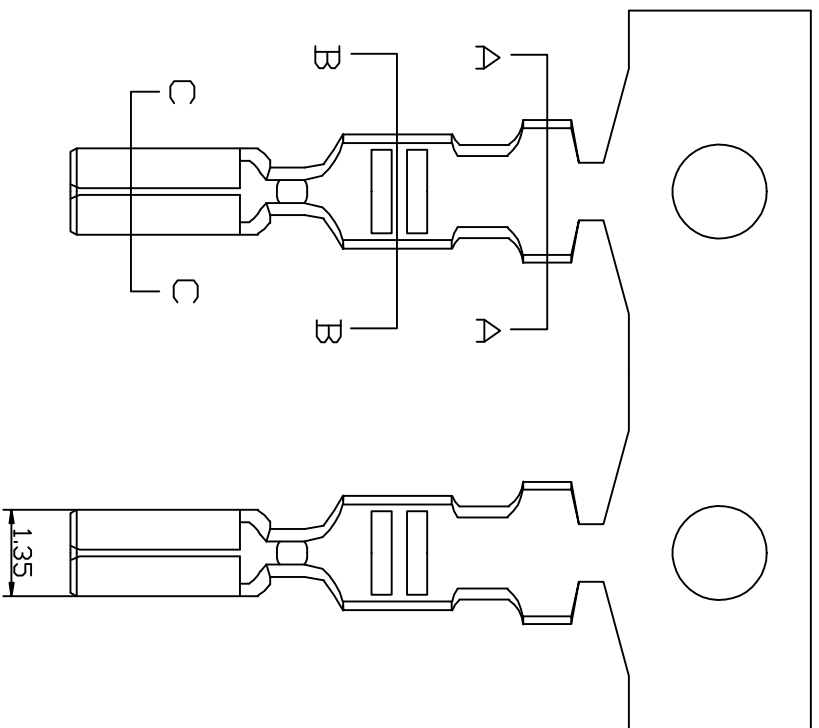


- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -40℃~+85℃
  - Contact resistance: 10MΩ max
- TERMINAL**
- Part No: T2515PT
  - Applicable wire: AWG#22-#28
  - Material: Phosphor Bronze
  - Finish: Tin plated


4



SEC: A-A



SEC: B-B



SEC: C-C

**KLT** 深圳市康利通电子科技有限公司

成品规格图

Tolerance

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-05-16	1:1		
DRAWN BY	UNIT:mm		A	A4
李国常	PART No	T2515PT		

B

C

D

E

F