

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

HOUSING

- Part No: H2503-NP
- Poles: 02-15
- Material: Nylon 66 UL94V-0

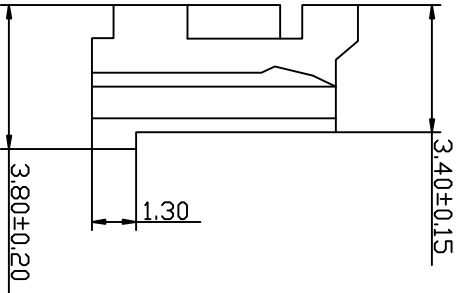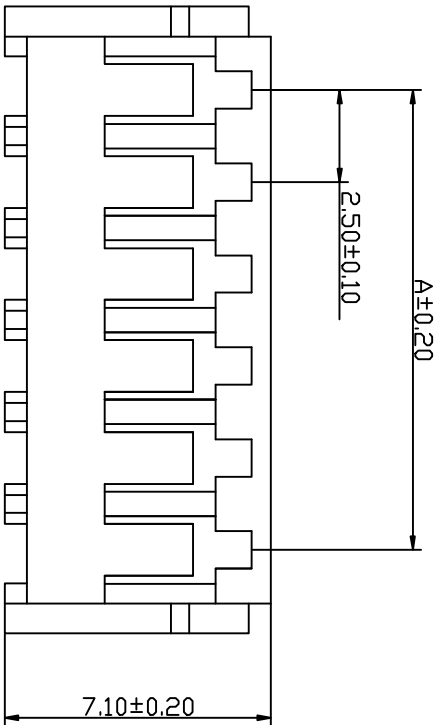

Part No	Dimensions (mm)	
	A	B
H2503-02	2.50	7.00
H2503-03	5.00	9.50
H2503-04	7.50	12.00
H2503-05	10.00	14.50
H2503-06	12.50	17.00
H2503-07	15.00	19.50
H2503-08	17.50	22.00
H2503-09	20.00	24.50
H2503-10	22.50	27.00
H2503-11	25.00	29.50
H2503-12	27.50	32.00
H2503-13	30.00	34.50
H2503-14	32.50	37.00
H2503-15	35.00	39.50

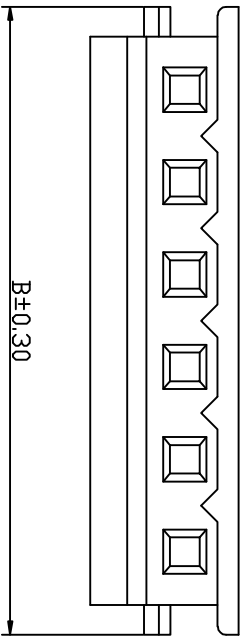

深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T OCERANCE		
CHECKED BY	DATE	SCALE			
	2016-05-19	1:1	VER No	SIZE	
DRAWN BY	UNIT:mm		A	A4	

李国常

PART No

H2503-NP

4

4

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 10MΩ max
- HOUSING
- Part No: H2504-NP
 - Material: Nylon 66 UL94V-0

4

4

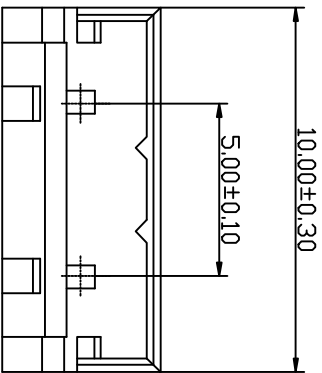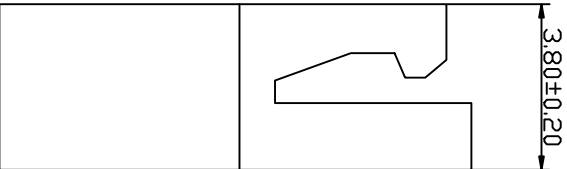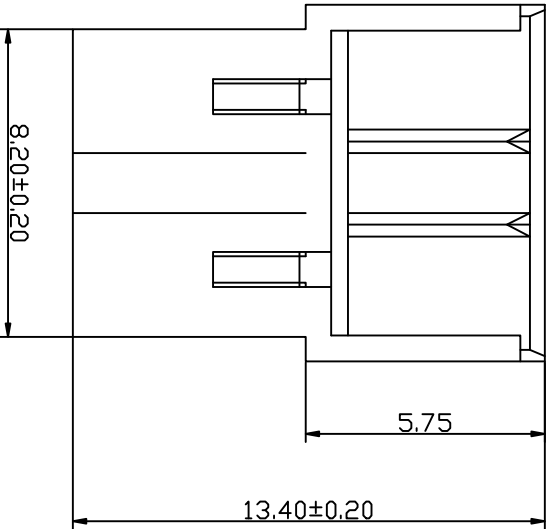

 深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		.0±0.25		
			.00±0.20		
	CHECKED BY	DATE	SCALE	.000±0.015	
	2016-05-19	1:1	VER No	SIZE	
DRAWN BY	UNIT:mm		A	A4	
李国常	PART No	H2504-NP			

B

C

D

E

F

1

B

C

E

公差表






REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

TERMINAL

- Part No: T2504BT
- Applicable wire: AWG#22-#28
- Material: Brass
- Finish: Tin plated

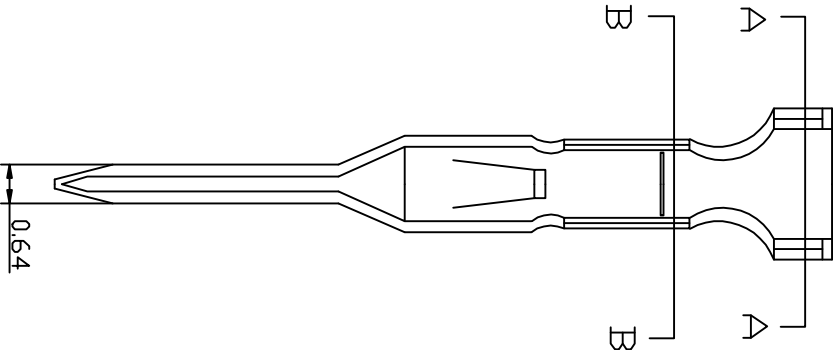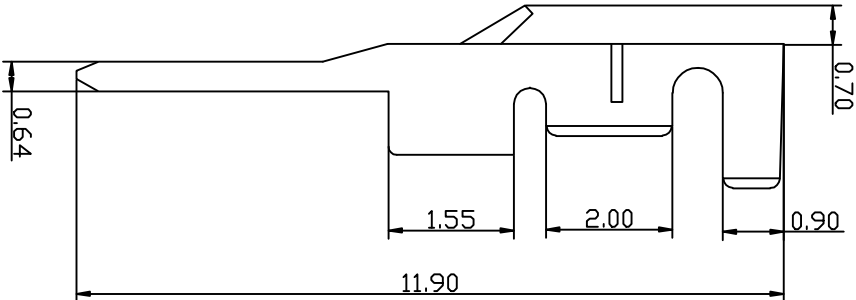

SEC:A-A

SEC:B-B

 深圳市康利通电子科技有限公司				T O C E R A N C E			
T I T L E				成品规格图			
C H E C K E D B Y				D A T E		S C A L E	
				2016-05-19		1:1	
D R A W N B Y				U N I T : m m			
李国常				P A R T N o		T2504BT	
						A	
						A4	

B

C

▽

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W2503R-NP
- Poles: 02-15
- Material: Nylon 66 UL94V-0
- Pin Material: Brass /Tin-plated

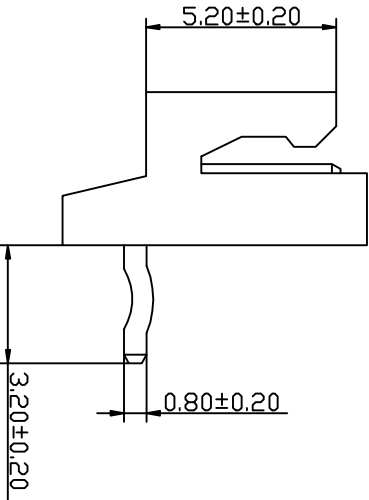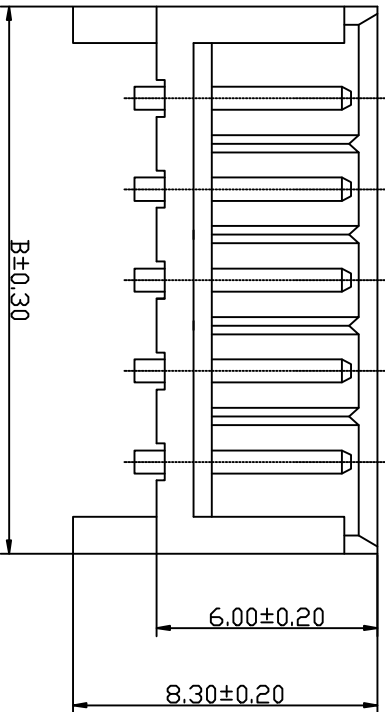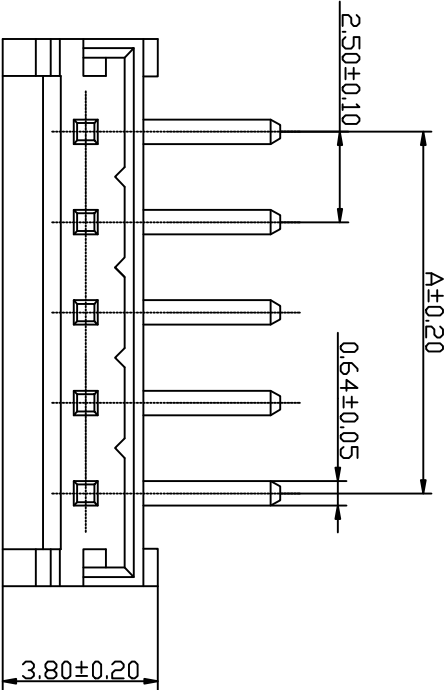

Part No	Dimensions (mm)	
	A	B
W2503R-02	2.50	7.50
W2503R-03	5.00	10.00
W2503R-04	7.50	12.50
W2503R-05	10.00	15.00
W2503R-06	12.50	17.50
W2503R-07	15.00	20.00
W2503R-08	17.50	22.50
W2503R-09	20.00	25.00
W2503R-10	22.50	27.50
W2503R-11	25.00	30.00
W2503R-12	27.50	32.50
W2503R-13	30.00	35.00
W2503R-14	32.50	37.50
W2503R-15	35.00	40.00

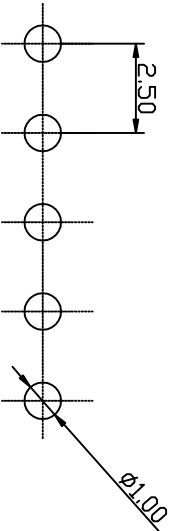

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T OCERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
DRAWN BY	UNIT:mm	1:1	A	A4

李国常

PART No

W2503R-NP

4

4

1

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常


SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max



WAFER

- Part No: W2503V-NP
- Poles: 02-15
- Material: Nylon 66 UL94V-0
- Pin Material: Brass /Tin-plated


4

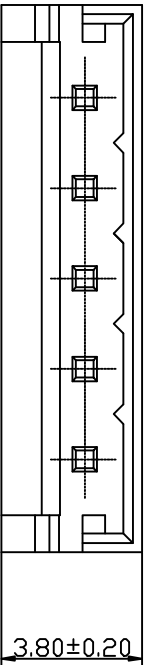

4

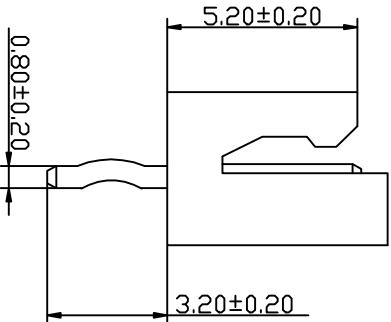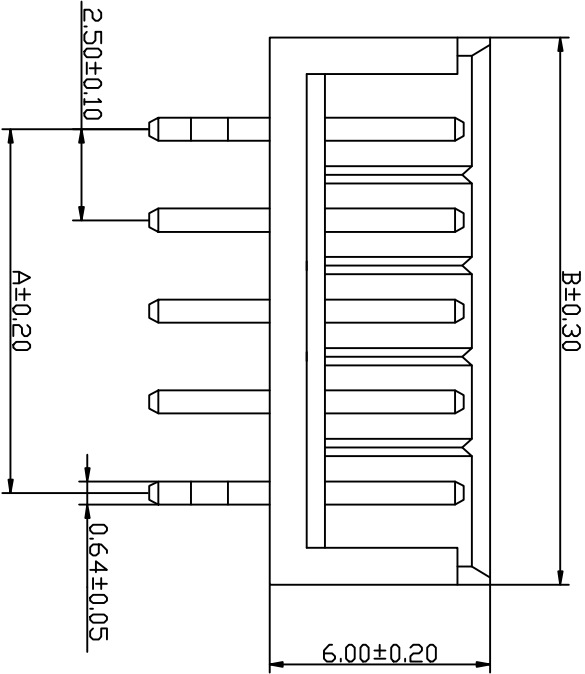

Part No	Dimensions (mm)	
	A	B
W2503V-02	2.50	7.50
W2503V-03	5.00	10.00
W2503V-04	7.50	12.50
W2503V-05	10.00	15.00
W2503V-06	12.50	17.50
W2503V-07	15.00	20.00
W2503V-08	17.50	22.50
W2503V-09	20.00	25.00
W2503V-10	22.50	27.50
W2503V-11	25.00	30.00
W2503V-12	27.50	32.50
W2503V-13	30.00	35.00
W2503V-14	32.50	37.50
W2503V-15	35.00	40.00

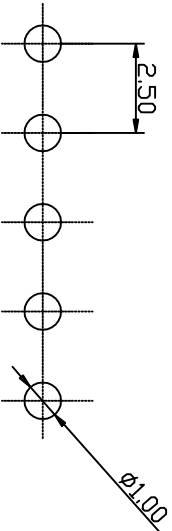

P.C.B LAYOUT

1



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No

SIZE

A

A4

李国常

PART No

W2503V-NP

B

C

D

E

F