

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常




SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

HOUSING

- Part No: H2511-NP
- Poles: 02-12
- Material: Nylon 66 UL94V-0

4

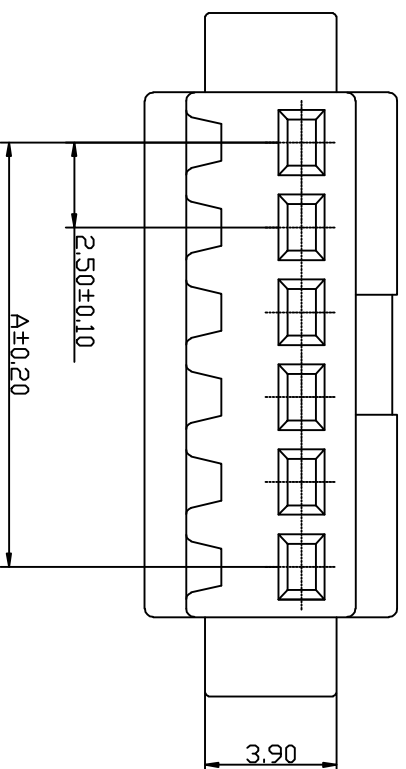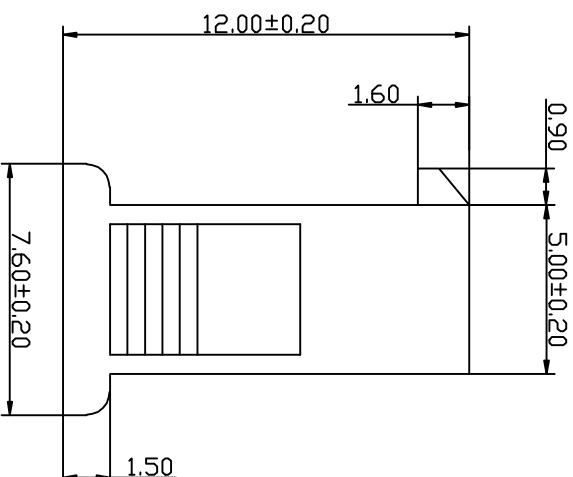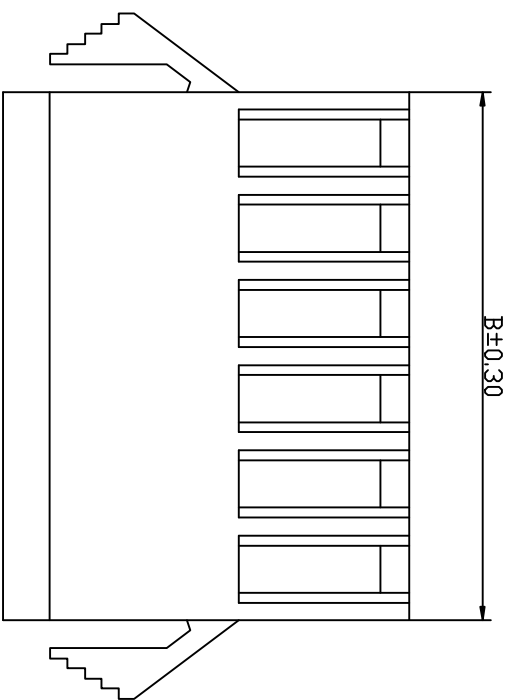

Part No	Dimensions (mm)	
	A	B
H2511-02	2.50	5.50
H2511-03	5.00	8.00
H2511-04	7.50	10.50
H2511-05	10.00	13.00
H2511-06	12.50	15.50
H2511-07	15.00	18.00
H2511-08	17.50	20.50
H2511-09	20.00	23.00
H2511-10	22.50	25.50
H2511-11	25.00	28.00
H2511-12	27.50	30.50

KLT 深圳市康利通电子科技有限公司

成品规格图

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE

CHECKED BY

DATE 2016-05-19

DRAWN BY

李国常

DATE

SCALE

1:1

UNIT:mm

PART NO

H2511-NP

SCALE

VER No

A

SIZE

A4

B

C

D

E

F

4

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

■ HOUSING

- Part No: H2512-NP
- Poles: 02-12
- Material: Nylon 66 UL94V-0

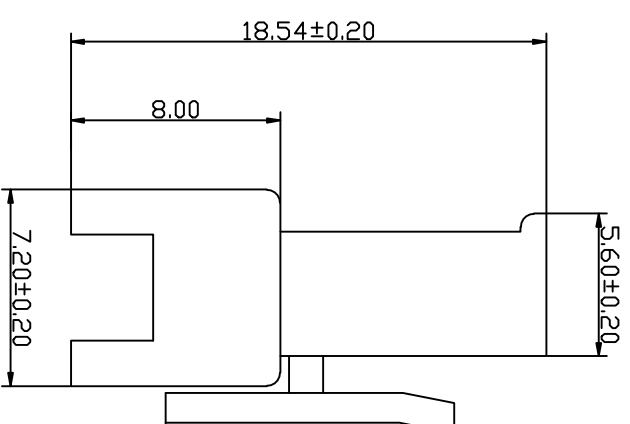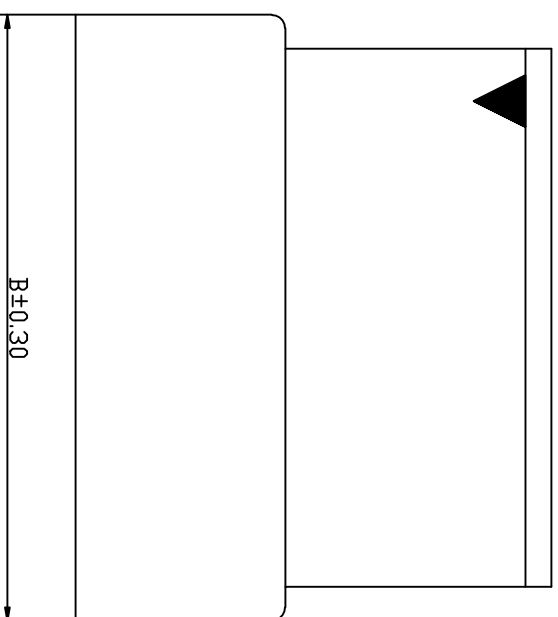

Part No	Dimensions (mm)	
	A	B
H2512-02	2.50	7.95
H2512-03	5.00	10.45
H2512-04	7.50	12.95
H2512-05	10.00	15.45
H2512-06	12.50	17.95
H2512-07	15.00	20.45
H2512-08	17.50	22.95
H2512-09	20.00	25.45
H2512-10	22.50	27.95
H2512-11	25.00	30.45
H2512-12	27.50	32.95

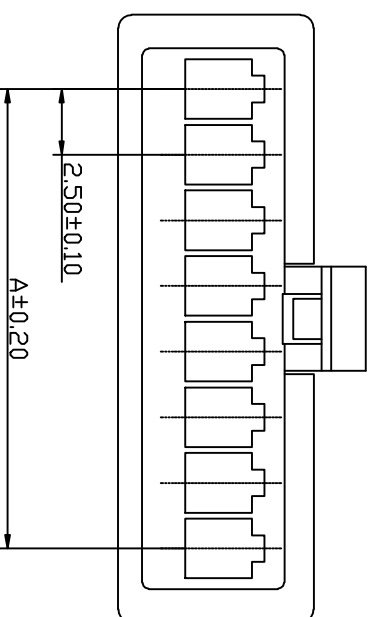

KLT 深圳市康利通电子科技有限公司

TITLE

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

CHECKED BY

DATE

SCALE

.000±0.015

DRAWN BY

2016-05-19

1:1

VER No

SIZE

李国常

UNIT:mm



A

A4

李国常

PART NO

H2512-NP

4

4

B

C

D

E

F

1

B



C

E


公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

4

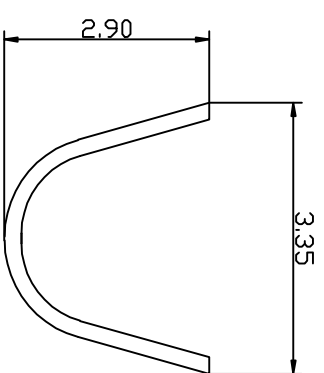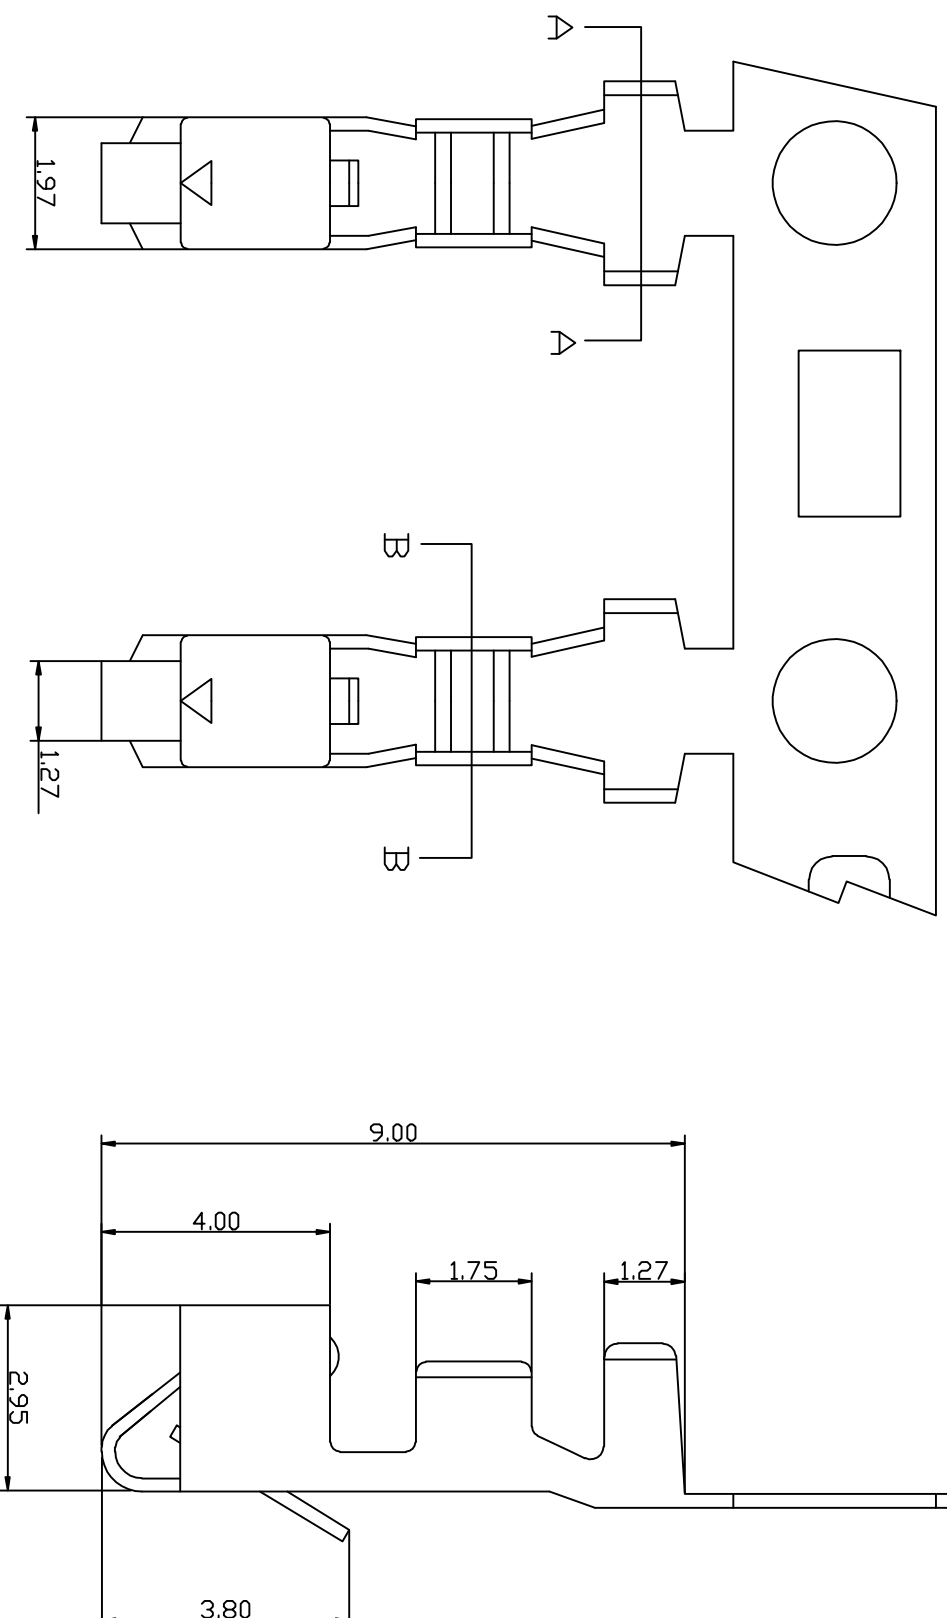

SEC: A-A



SEC: B-B

KLT 深圳市康利通电子科技有限公司

成品规格图

Tolerance

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-05-19	1:1		
DRAWN BY	UNIT:mm		A	A4
李国常	PART No	T2511BT		

B

C

D

E

F

4

B



C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

4

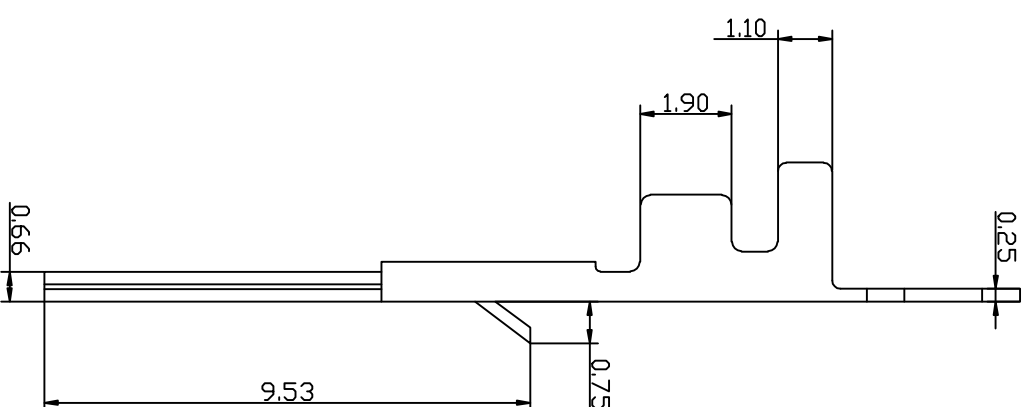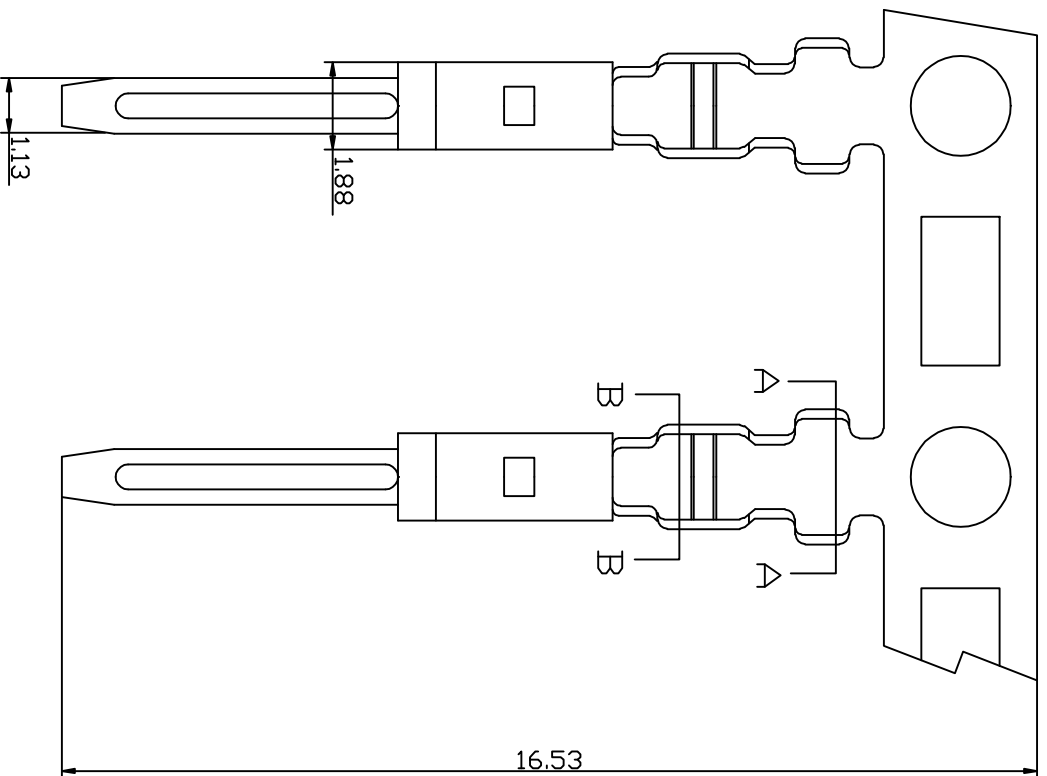


■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

■ TERMINAL

- Part No: T2512BT
- Applicable wire: AWG#22-#28
- Material: Brass
- Finish: Tin plated



SEC: A-A



SEC: B-B

KLT 深圳市康利通电子科技有限公司

TITLE

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

CHECKED BY

DATE

SCALE

2016-05-19

1:1

VER No

SIZE

DRAWN BY

UNIT:mm



A

A4

李国常

PART No

T2512BT

B

C

D

E

F

4