

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-05	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max


HOUSING

- Part No: H2010-NP
- Poles: 02-31
- Material: Nylon 66 UL94V-0

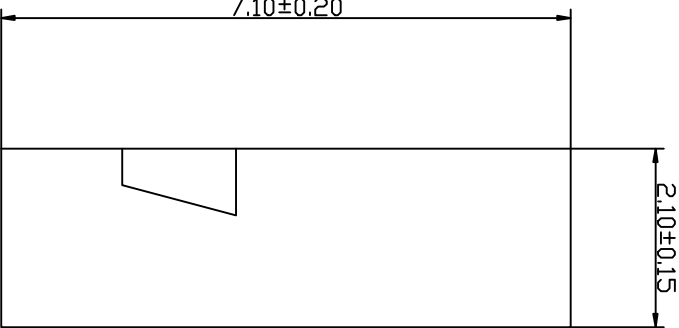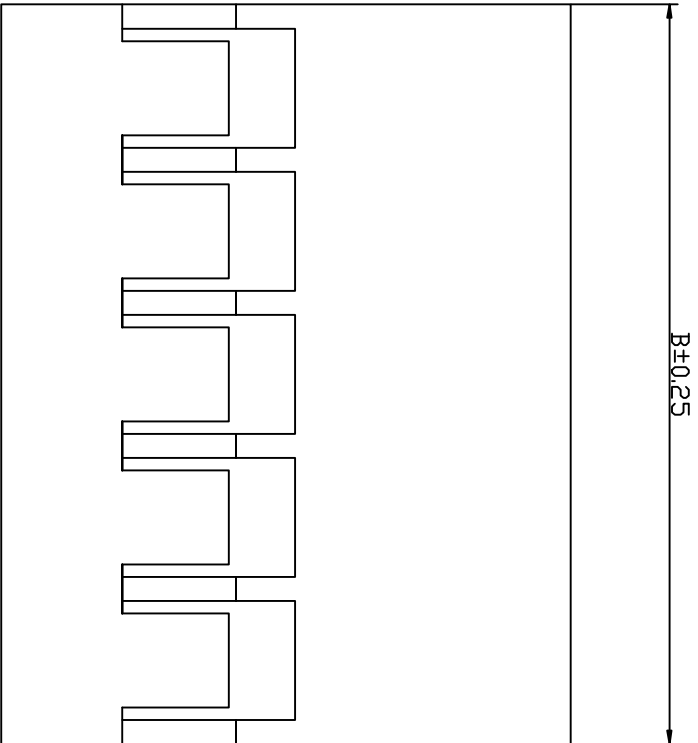

Part No	Dimensions (mm)	
	A	B
H2010-02	2.00	4.20
H2010-03	4.00	6.20
H2010-04	6.00	8.20
H2010-05	8.00	10.20
H2010-06	10.00	12.20
H2010-07	12.00	14.20
H2010-08	14.00	16.20
H2010-09	16.00	18.20
H2010-10	18.00	20.20
H2010-11	20.00	22.20
H2010-12	22.00	24.20
H2010-13	24.00	26.20
H2010-14	26.00	28.20
H2010-15	28.00	30.20
H2010-16	30.00	32.20

Part No	Dimensions (mm)	
	A	B
H2010-17	32.00	34.20
H2010-18	34.00	36.20
H2010-19	36.00	38.20
H2010-20	38.00	40.20
H2010-21	40.00	42.20
H2010-22	42.00	44.20
H2010-23	44.00	46.20
H2010-24	46.00	48.20
H2010-25	48.00	50.20
H2010-26	50.00	52.20
H2010-27	52.00	54.20
H2010-28	54.00	56.20
H2010-29	56.00	58.20
H2010-30	58.00	60.20
H2010-31	60.00	62.20

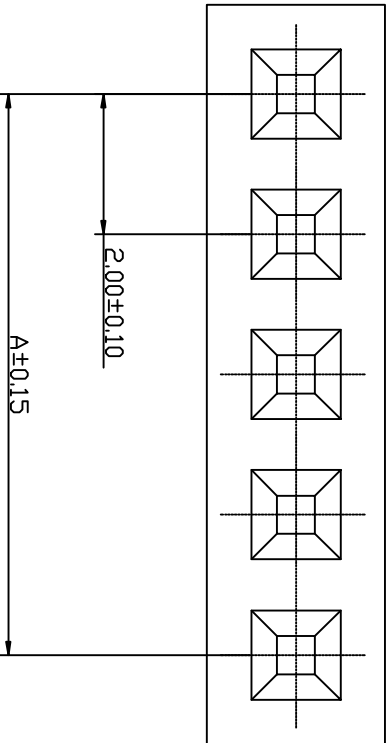

 深圳市康利通电子科技有限公司

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

T I T L E		成 品 规 格 图		. 0 ± 0 . 2 5	
CHECKED BY	DATE	SCALE	. 0 0 ± 0 . 2 0		
	2016-05-05	1 : 1	VER No	SIZE	
DRAWN BY	UNIT:mm		A	A 4	
李国常	PART No	H2010-NP			

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-05	李国常

SPECIFICATIONS



- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

HOUSING

- Part No: H2010-2*NP
- Poles: 04-80
- Material: Nylon 66 UL94V-0

Part No	Dimensions (mm)	
	A	B
H2010-2*02	2.00	4.20
H2010-2*03	4.00	6.20
H2010-2*04	6.00	8.20
H2010-2*05	8.00	10.20
H2010-2*06	10.00	12.20
H2010-2*07	12.00	14.20
H2010-2*08	14.00	16.20
H2010-2*09	16.00	18.20
H2010-2*10	18.00	20.20
H2010-2*11	20.00	22.20
H2010-2*12	22.00	24.20
H2010-2*13	24.00	26.20
H2010-2*14	26.00	28.20
H2010-2*15	28.00	30.20
H2010-2*16	30.00	32.20
H2010-2*17	32.00	34.20
H2010-2*18	34.00	36.20
H2010-2*19	36.00	38.20
H2010-2*20	38.00	40.20
H2010-2*21	40.00	42.20

Part No	Dimensions (mm)	
	A	B
H2010-2*22	42.00	44.00
H2010-2*23	44.00	46.00
H2010-2*24	46.00	48.00
H2010-2*25	48.00	50.20
H2010-2*26	50.00	52.20
H2010-2*27	52.00	54.20
H2010-2*28	54.00	56.20
H2010-2*29	56.00	58.20
H2010-2*30	58.00	60.20
H2010-2*31	60.00	62.20
H2010-2*32	62.00	64.20
H2010-2*33	64.00	66.20
H2010-2*34	66.00	68.20
H2010-2*35	68.00	70.20
H2010-2*36	70.00	72.20
H2010-2*37	72.00	74.20
H2010-2*38	74.00	76.20
H2010-2*39	76.00	78.20
H2010-2*40	78.00	80.20

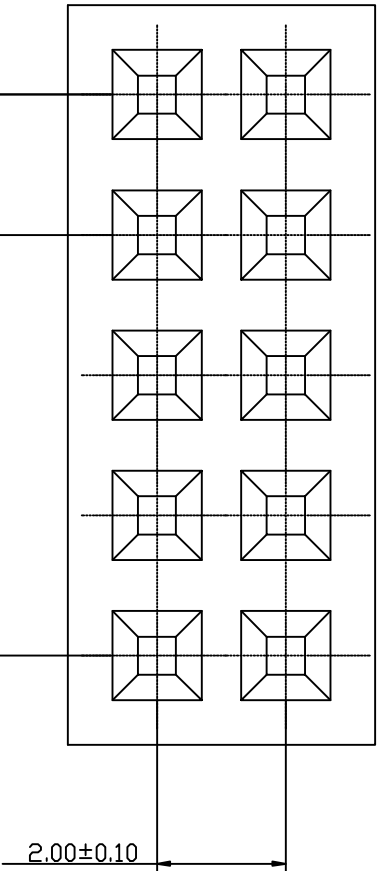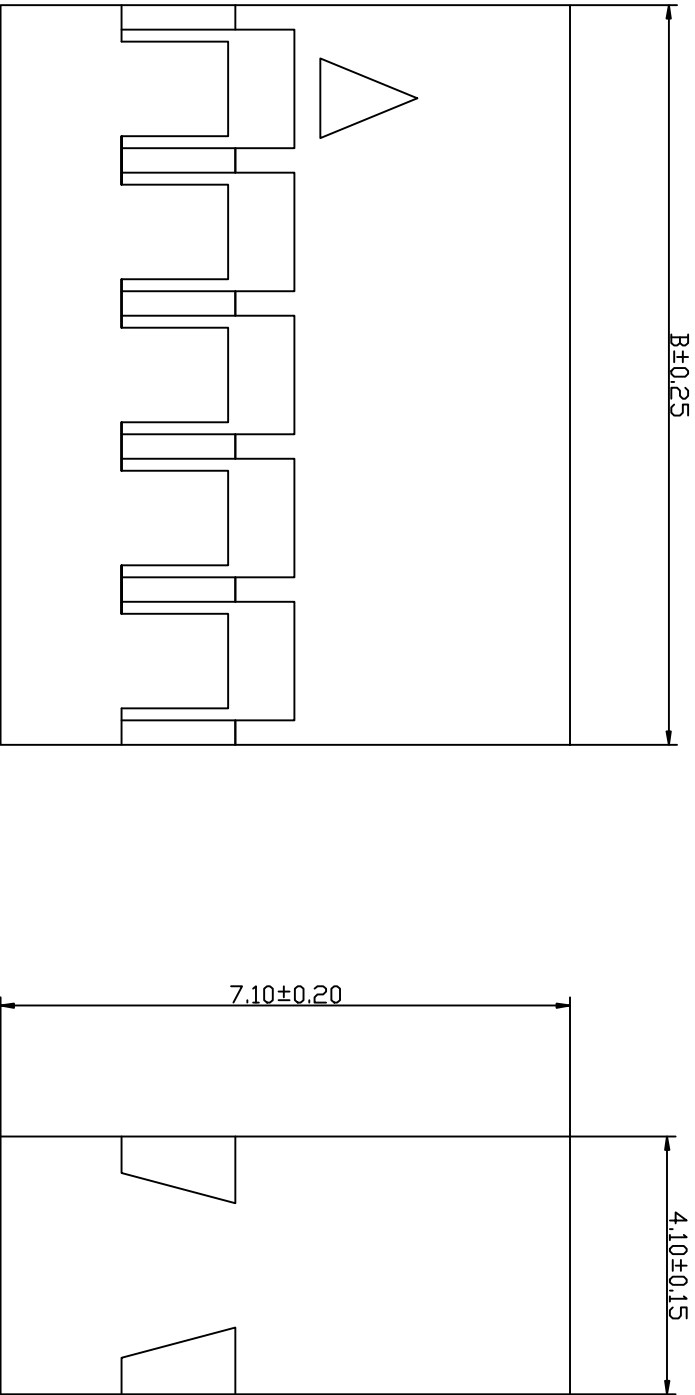

 深圳市康利通电子科技有限公司			T O C E R A N C E	
			0±0.30	
			.0±0.25	
			.00±0.20	
			.000±0.015	
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-05-05	1:1		
DRAWN BY	UNIT:mm		A	A4
李国常	PART No	H2010-2*NP		

B

C

D

E

F

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-05	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max


HOUSING

- Part No: H2010-2*NP-1
- Poles: 04-50
- Material: Nylon 66 UL94V-0

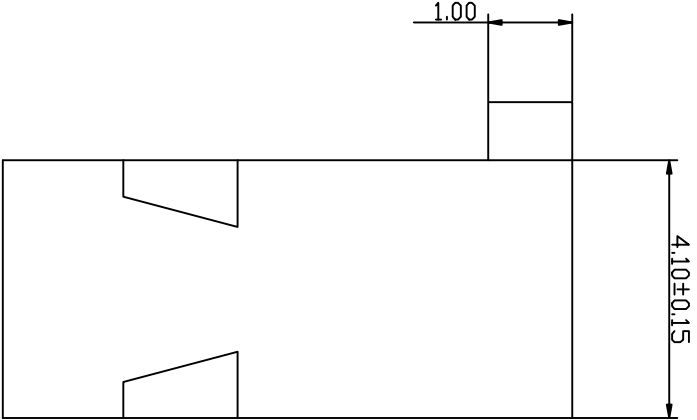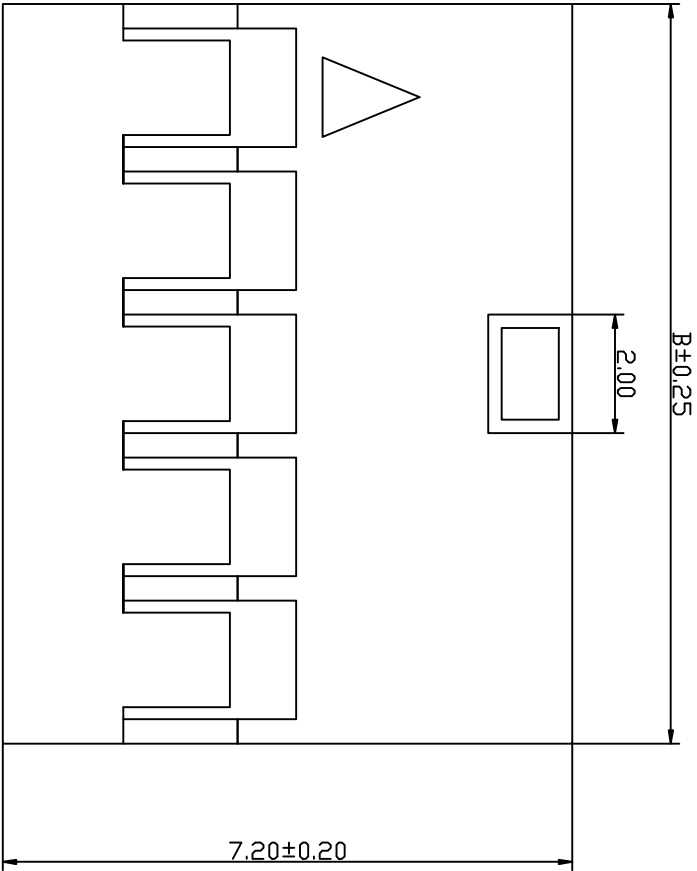

Part No	Dimensions (mm)	
	A	B
H2010-2*02-1	2.00	4.20
H2010-2*03-1	4.00	6.20
H2010-2*04-1	6.00	8.20
H2010-2*05-1	8.00	10.20
H2010-2*06-1	10.00	12.20
H2010-2*07-1	12.00	14.20
H2010-2*08-1	14.00	16.20
H2010-2*09-1	16.00	18.20
H2010-2*10-1	18.00	20.20
H2010-2*11-1	20.00	22.20
H2010-2*12-1	22.00	24.20
H2010-2*13-1	24.00	26.20
H2010-2*14-1	26.00	28.20
H2010-2*15-1	28.00	30.20
H2010-2*16-1	30.00	32.20

Part No	Dimensions (mm)	
	A	B
H2010-2*17-1	32.00	34.20
H2010-2*18-1	34.00	36.20
H2010-2*19-1	36.00	38.20
H2010-2*20-1	38.00	40.20
H2010-2*21-1	40.00	42.20
H2010-2*22-1	42.00	44.20
H2010-2*23-1	44.00	46.20
H2010-2*24-1	46.00	48.20
H2010-2*25-1	48.00	50.20

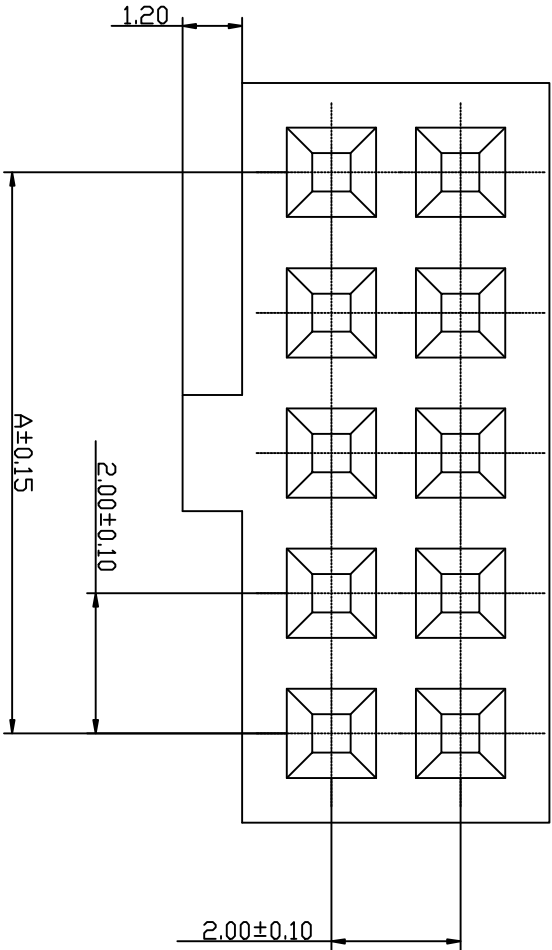

深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图			
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-05-05	1:1		

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART No	H2010-2*NP-1
-----	---------	--------------

B

C

D

E

F

B

C

E

公差表





REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-05	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max


TERMINAL

- Part No: T2010PG
- Applicable wire: AWG#26-#30
- Material: phosphor Bronze
- Finish: Gold-flash

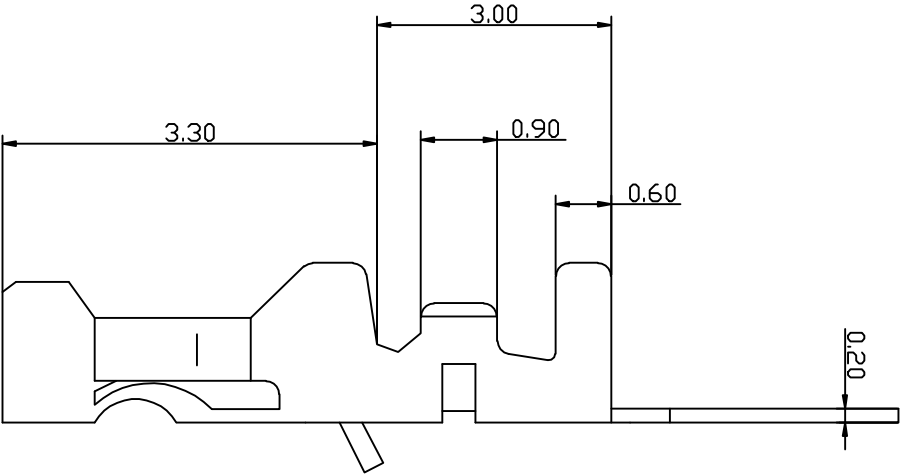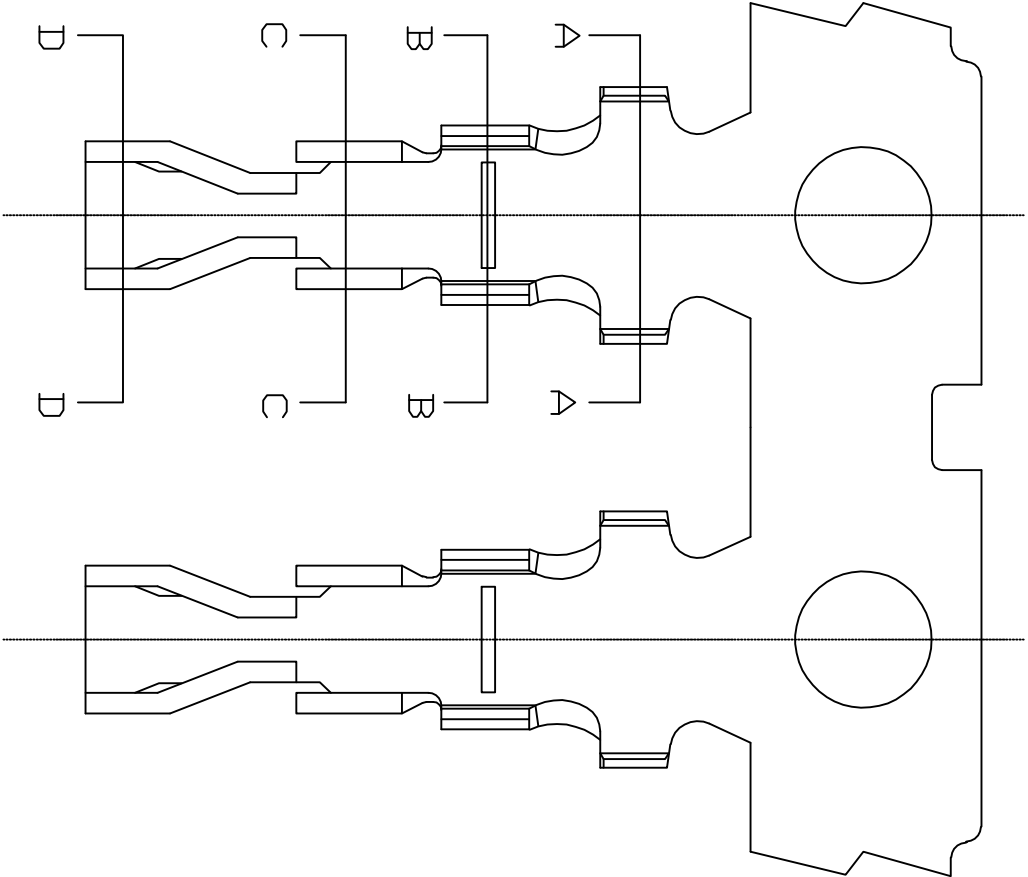


SEC: C-C

SEC: D-D

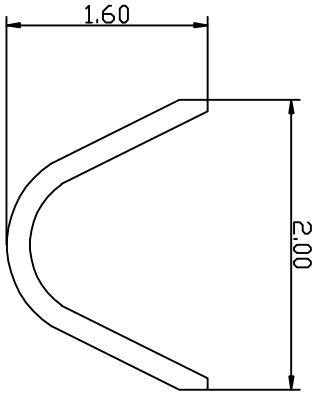

SEC: A-A



SEC: B-B



深圳市康利通电子科技有限公司

成品规格图			TO CERANCE	
TITLE			0±0.25	
CHECKED BY	DATE	SCALE	0±0.30	
	2016-05-05	1:1	0.00±0.25	
			0.000±0.015	
DRAWN BY	UNIT:mm		VER No	SIZE
李国常			A	A4
PART No	T2010PG			

B

C

D

E

F