

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常




SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

HOUSING

- Part No: H2006-NP
- Poles: 02-15
- Material: Nylon 66 UL94V-0

Part No	Dimensions (mm)	
	A	B
H2006-02	2.00	6.00
H2006-03	4.00	8.00
H2006-04	6.00	10.00
H2006-05	8.00	12.00
H2006-06	10.00	14.00
H2006-07	12.00	16.00
H2006-08	14.00	18.00
H2006-09	16.00	20.00
H2006-10	18.00	22.00
H2006-11	20.00	24.00
H2006-12	22.00	26.00
H2006-13	24.00	28.00
H2006-14	26.00	30.00
H2006-15	28.00	32.00

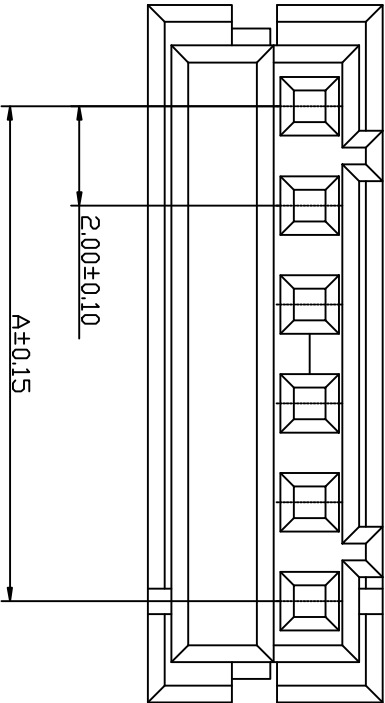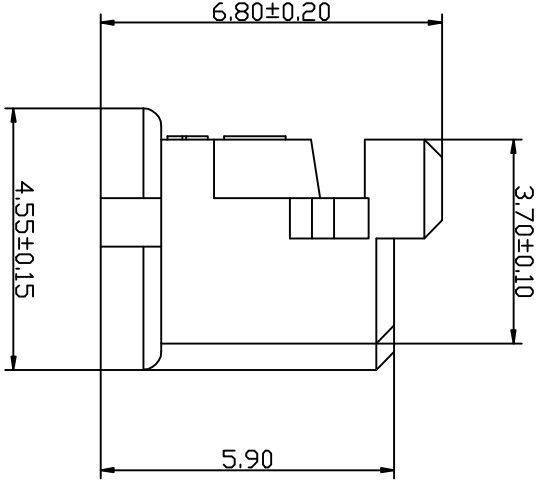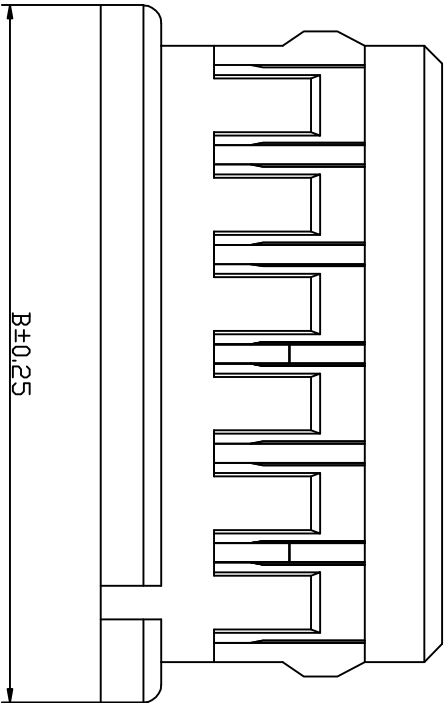

深圳市康利通电子科技有限公司

Tolerance

0±0.30

0±0.25

0.00±0.20

0.000±0.015

Title		成品规格图		Tolerance	
CHECKED BY	DATE	SCALE	1:1	VER No	SIZE

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART No	H2006-NP
-----	---------	----------

4

4

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

TERMINAL

- Part No: T2006PT
- Applicable wire: AWG#22-#28
- Material: Phosphor Bronze
- Finish: Tin plated

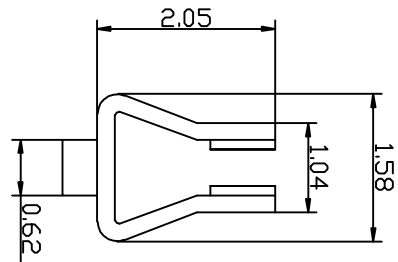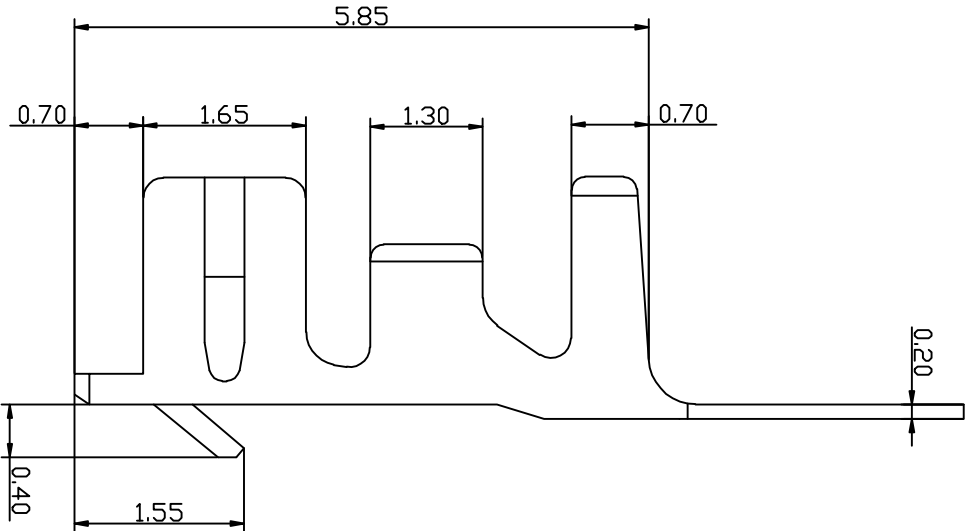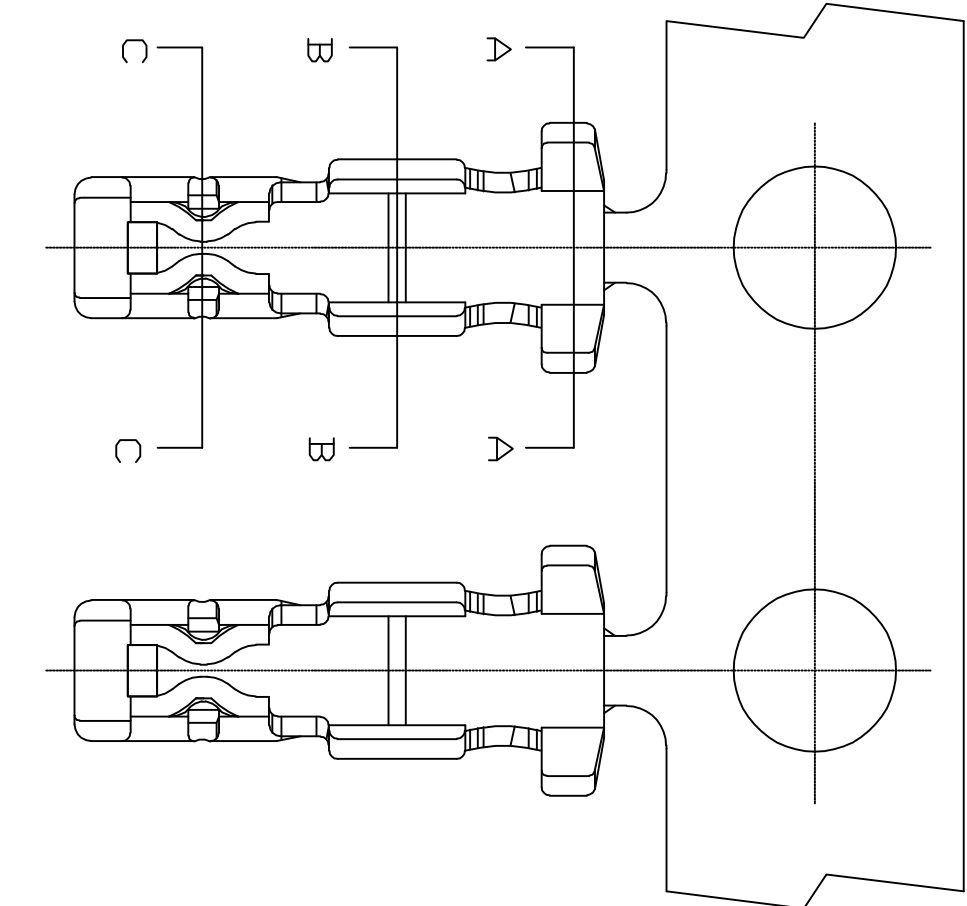

SEC: C-C

SEC: A-A

SEC: B-B



深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

成品规格图

TITLE

CHECKED BY

DATE

SCALE

2016-05-12


1:1

VER No

SIZE

DRAWN BY

UNIT:mm



A

A4

李国常

PART No

T2006PT

4

4

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 650V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W2006R-NP
- Poles: 02-15
- Material: Nylon 6T UL94V-0
- Pin Material: Brass /Tin-plated

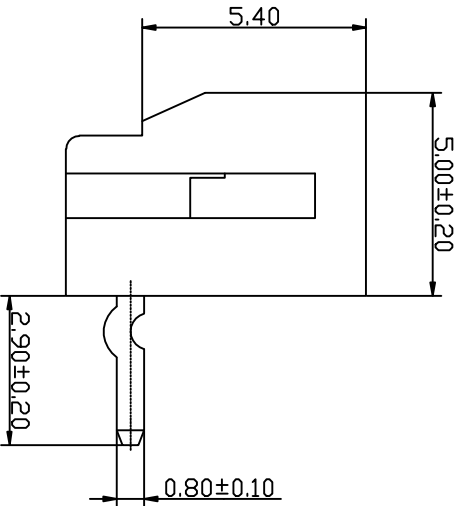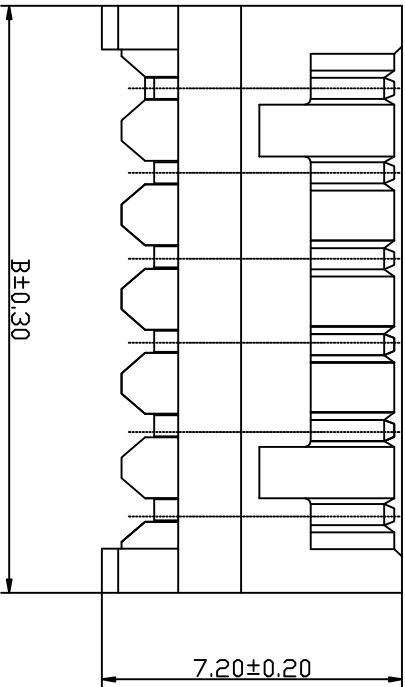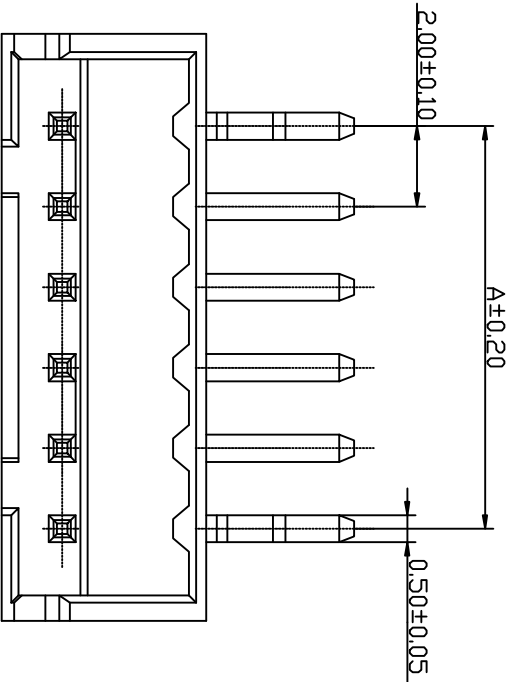

Part No	Dimensions (mm)	
	A	B
W2006R-02	2.00	6.00
W2006R-03	4.00	8.00
W2006R-04	6.00	10.00
W2006R-05	8.00	12.00
W2006R-06	10.00	14.00
W2006R-07	12.00	16.00
W2006R-08	14.00	18.00
W2006R-09	16.00	20.00
W2006R-10	18.00	22.00
W2006R-11	20.00	24.00
W2006R-12	22.00	26.00
W2006R-13	24.00	28.00
W2006R-14	26.00	30.00
W2006R-15	28.00	32.00

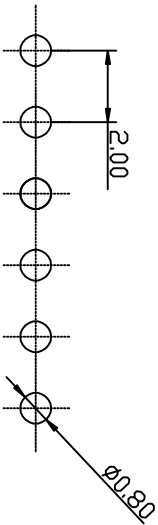

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

 深圳市康利通电子科技有限公司			T OCERANCE	
			0±0.30	
			.0±0.25	
			.00±0.20	
			.000±0.015	
TITLE	成品规格图			
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-05-12	1:1		

B

C

D

E

F




B

C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常

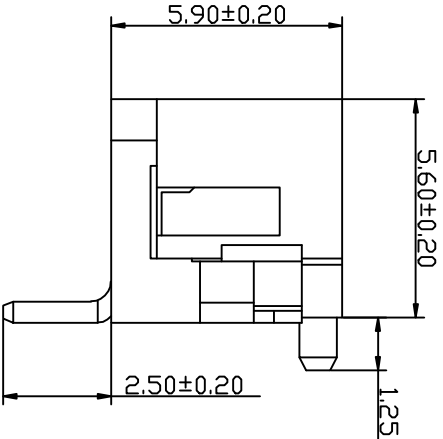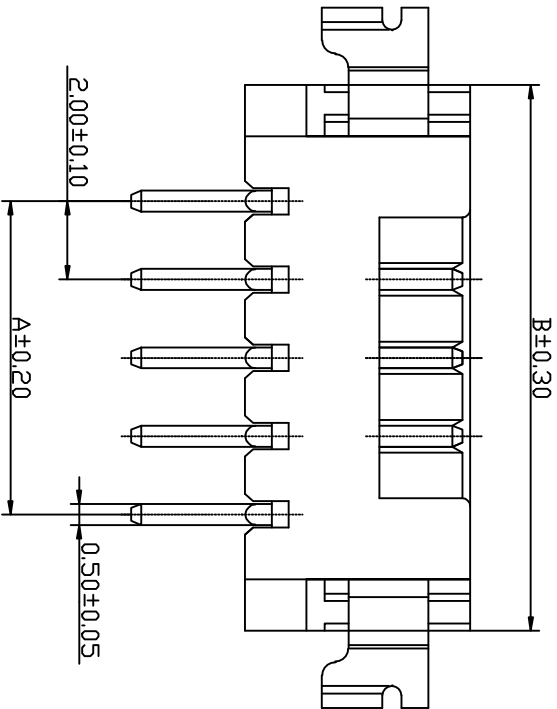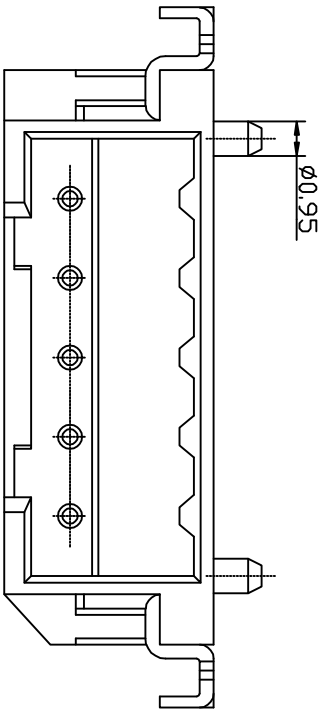

SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 650V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max
- WAFER
- Part No: W2006SRD-NP
 - Poles: 02-15
 - Material: Nylon 6T UL94V-0
 - Pin Material: Brass / Tin-plated

Part No	Dimensions (mm)	
	A	B
W2006SRD-02	2.00	8.50
W2006SRD-03	4.00	10.50
W2006SRD-04	6.00	12.50
W2006SRD-05	8.00	14.50
W2006SRD-06	10.00	16.50
W2006SRD-07	12.00	18.50
W2006SRD-08	14.00	20.50
W2006SRD-09	16.00	22.50
W2006SRD-10	18.00	24.50
W2006SRD-11	20.00	26.50
W2006SRD-12	22.00	28.50
W2006SRD-13	24.00	30.50
W2006SRD-14	26.00	32.50
W2006SRD-15	28.00	34.50

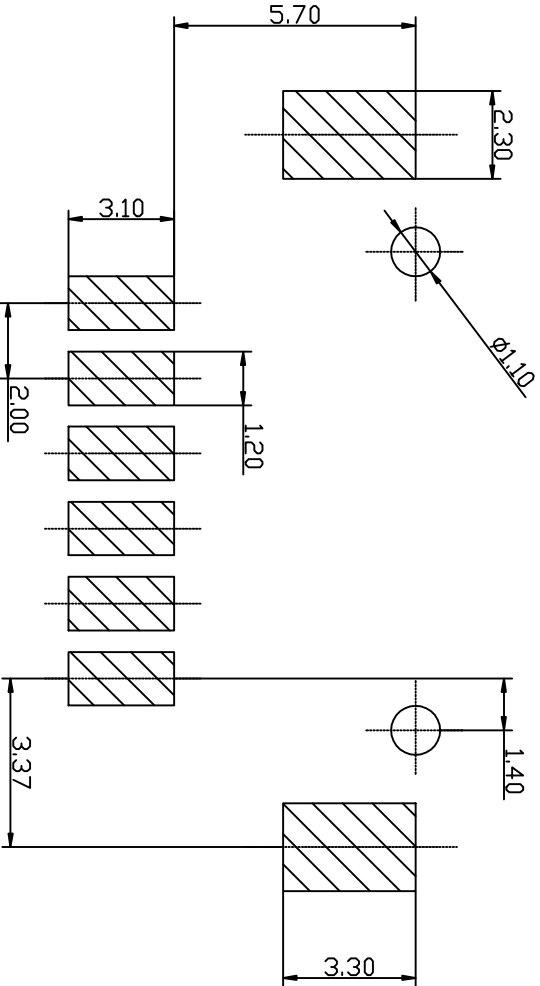

P.C.B LAYOUT



深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

0.0±0.25

0.00±0.20

0.000±0.015

TITTLE		成品规格图		SCALE		VER No		SIZE	
CHECKED BY	DATE	2016-05-12	1:1	VER No	SIZE	A	A4		

DRAWN BY	UNIT:mm	李国常	PART No	W2006SRD-NP
----------	---------	-----	---------	-------------

B

C

D

E

F

B




C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常


4

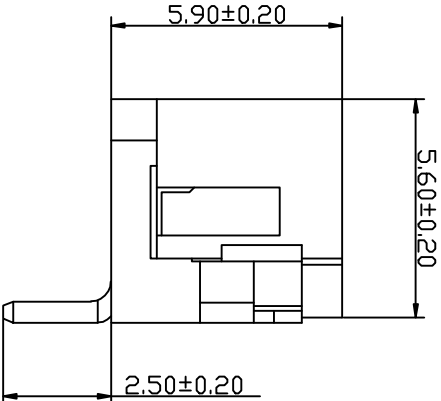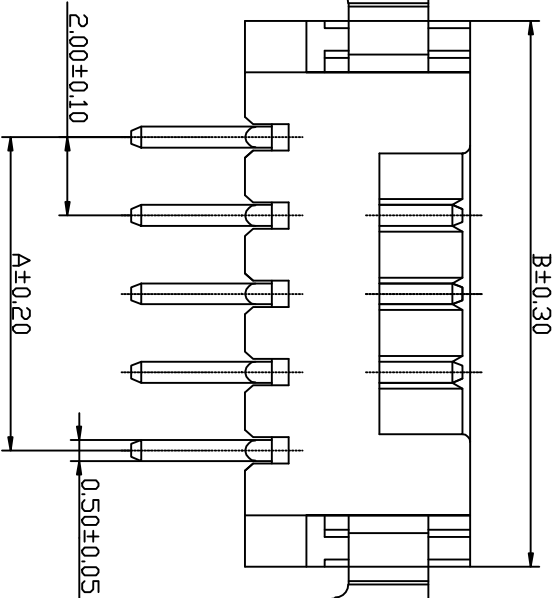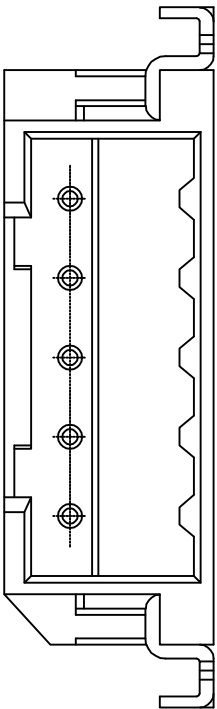

SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 650V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max
- WAFER
- Part No: W2006SR-NP
 - Poles: 02-15
 - Material: Nylon 6T UL94V-0
 - Pin Material: Brass / Tin-plated

Part No	Dimensions (mm)	
	A	B
W2006SR-02	2.00	8.50
W2006SR-03	4.00	10.50
W2006SR-04	6.00	12.50
W2006SR-05	8.00	14.50
W2006SR-06	10.00	16.50
W2006SR-07	12.00	18.50
W2006SR-08	14.00	20.50
W2006SR-09	16.00	22.50
W2006SR-10	18.00	24.50
W2006SR-11	20.00	26.50
W2006SR-12	22.00	28.50
W2006SR-13	24.00	30.50
W2006SR-14	26.00	32.50
W2006SR-15	28.00	34.50

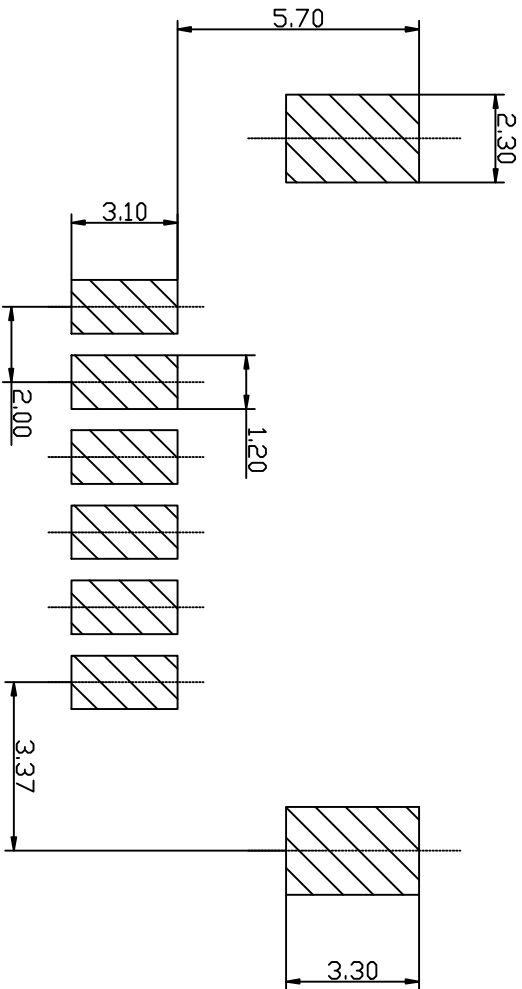

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		TO CERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-05-12	1:1		

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART No	W2006SR-NP
-----	---------	------------

B

C

D

E

F

4

1




B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常

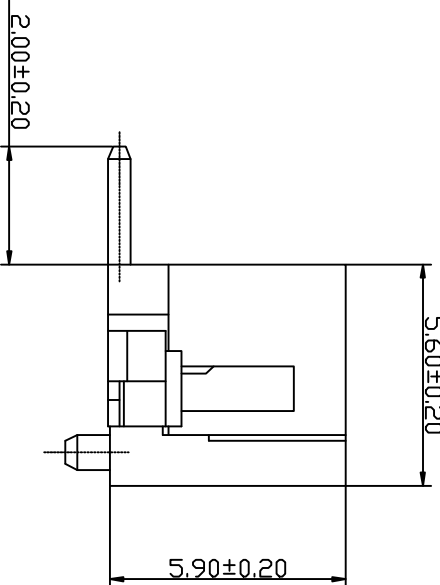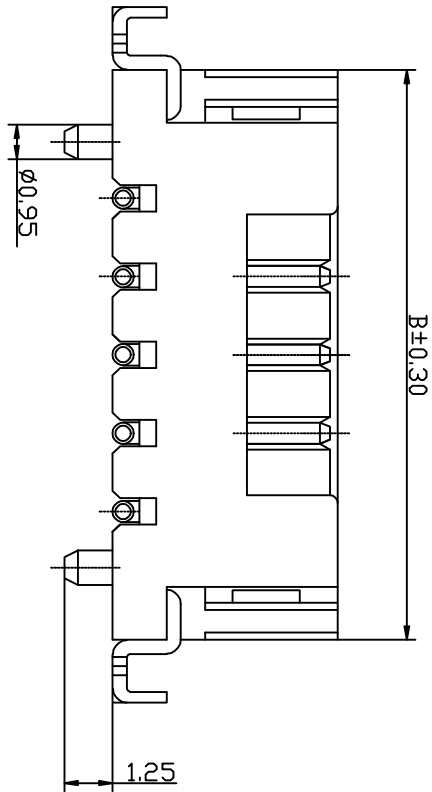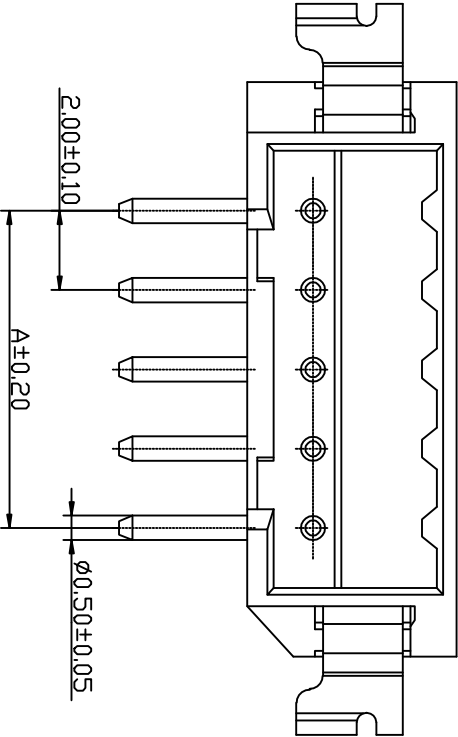

Part No	Dimensions (mm)	
	A	B
W2006SVD-02	2.00	8.50
W2006SVD-03	4.00	10.50
W2006SVD-04	6.00	12.50
W2006SVD-05	8.00	14.50
W2006SVD-06	10.00	16.50
W2006SVD-07	12.00	18.50
W2006SVD-08	14.00	20.50
W2006SVD-09	16.00	22.50
W2006SVD-10	18.00	24.50
W2006SVD-11	20.00	26.50
W2006SVD-12	22.00	28.50
W2006SVD-13	24.00	30.50
W2006SVD-14	26.00	32.50
W2006SVD-15	28.00	34.50

SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 650V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max
- WAFER
- Part No: W2006SVD-NP
 - Poles: 02-15
 - Material: Nylon 6T UL94V-0
 - Pin Material: Brass / Tin-plated

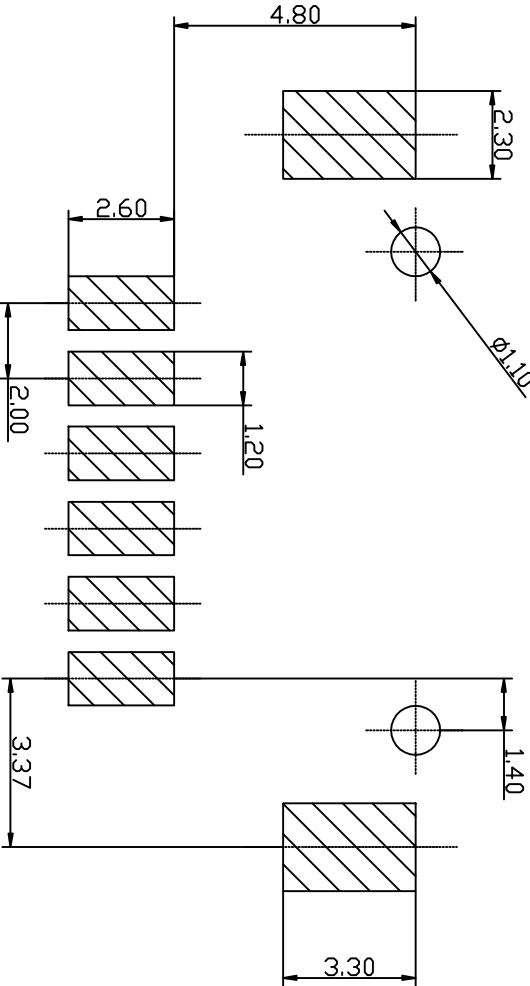

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

0±0.25

0.00±0.20

0.000±0.015

VER No

SIZE



A

A4

李国常

PART No

W2006SVD-NP

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 650V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max
- WAFER
- Part No: W2006SV-NP
 - Poles: 02-15
 - Material: Nylon 6T UL94V-0
 - Pin Material: Brass / Tin-plated

4

4

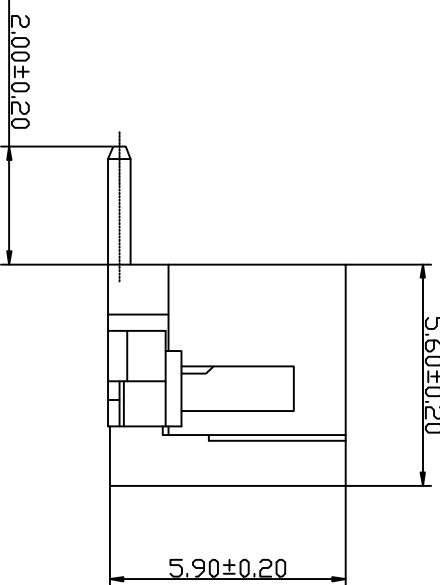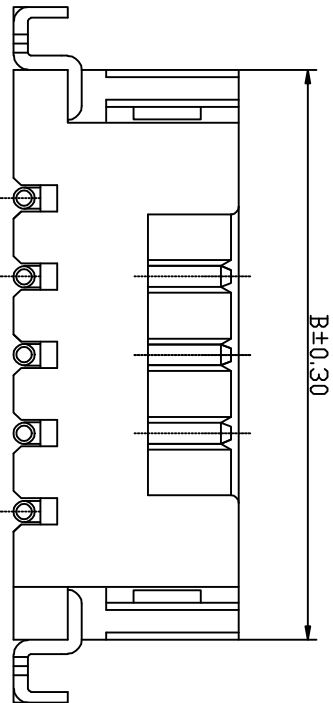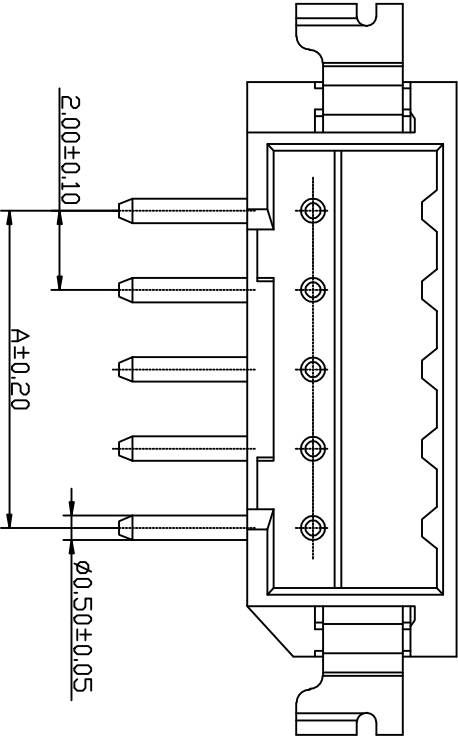

Part No	Dimensions (mm)	
	A	B
W2006SV-02	2.00	8.50
W2006SV-03	4.00	10.50
W2006SV-04	6.00	12.50
W2006SV-05	8.00	14.50
W2006SV-06	10.00	16.50
W2006SV-07	12.00	18.50
W2006SV-08	14.00	20.50
W2006SV-09	16.00	22.50
W2006SV-10	18.00	24.50
W2006SV-11	20.00	26.50
W2006SV-12	22.00	28.50
W2006SV-13	24.00	30.50
W2006SV-14	26.00	32.50
W2006SV-15	28.00	34.50

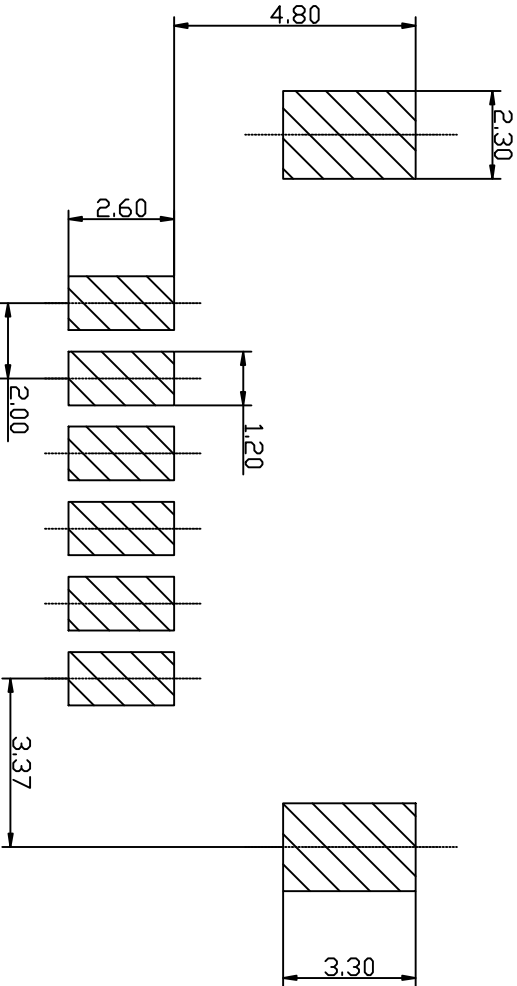

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

0±0.25

0.00±0.20

0.000±0.015

VER No

SIZE



A

A4

李国常

PART No

W2006SV-NP

B

C

D

E

F

1

B




C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-12	李国常


4

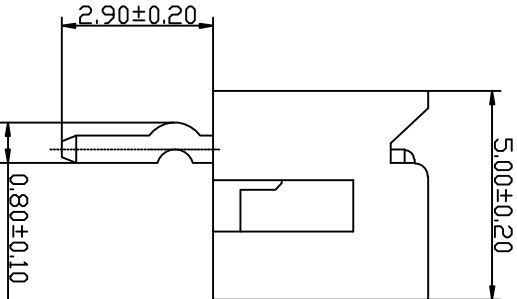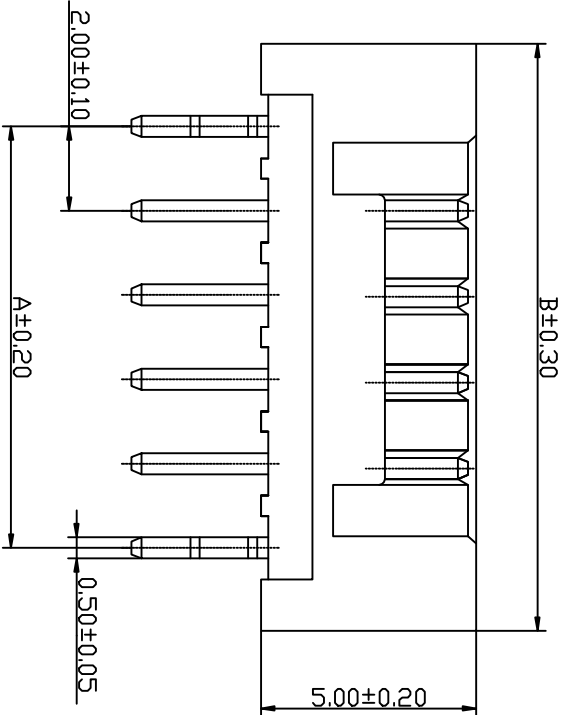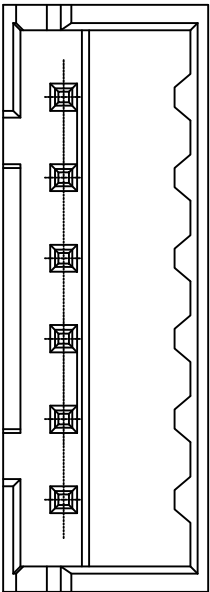

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 650V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max

- WAFER**
- Part No: W2006V-NP
 - Poles: 02-15
 - Material: Nylon 6T UL94V-0
 - Pin Material: Brass /Tin-plated

Part No	Dimensions (mm)	
	A	B
W2006V-02	2.00	6.00
W2006V-03	4.00	8.00
W2006V-04	6.00	10.00
W2006V-05	8.00	12.00
W2006V-06	10.00	14.00
W2006V-07	12.00	16.00
W2006V-08	14.00	18.00
W2006V-09	16.00	20.00
W2006V-10	18.00	22.00
W2006V-11	20.00	24.00
W2006V-12	22.00	26.00
W2006V-13	24.00	28.00
W2006V-14	26.00	30.00
W2006V-15	28.00	32.00

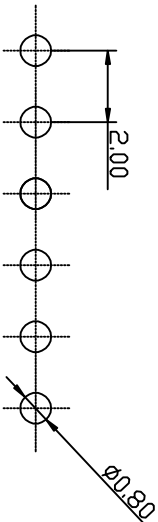

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T OCERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
DRAWN BY	UNIT:mm	1:1	A	A4

李国常

PART No

W2006V-NP

B

C

D

E

F

4

1