

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-25	李国常

SPECIFICATIONS


- Voltage rating: 150V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

HOUSING

- Part No: H1253-NP
- Poles: 02-30
- Material: Nylon 66 UL94V-0

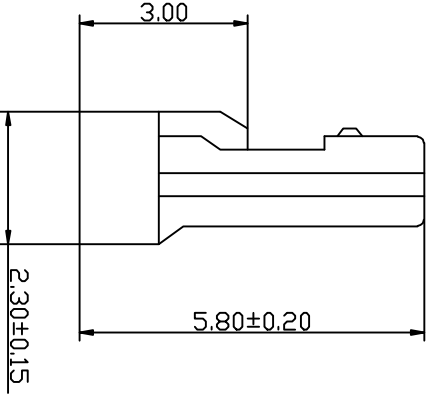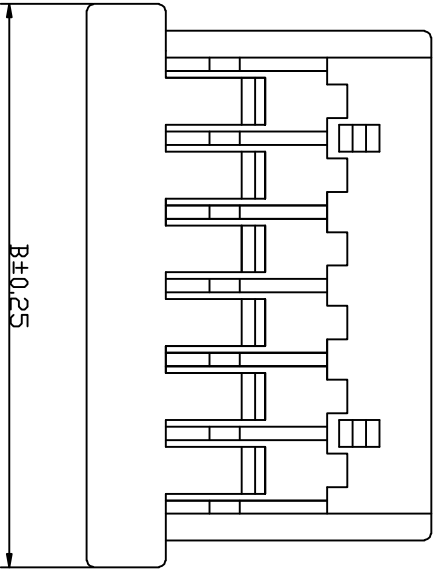

Part No	Dimensions (mm)	
	A	B
H1253-02	1.25	4.50
H1253-03	2.50	5.75
H1253-04	3.75	7.00
H1253-05	5.00	8.25
H1253-06	6.25	9.50
H1253-07	7.50	10.75
H1253-08	8.75	12.00
H1253-09	10.00	13.25
H1253-10	11.25	14.50
H1253-11	12.50	15.75
H1253-12	13.75	17.00
H1253-13	15.00	18.25
H1253-14	16.25	19.50
H1253-15	17.50	20.75
H1253-20	23.75	27.00
H1253-25	30.00	33.25
H1253-30	36.25	39.50

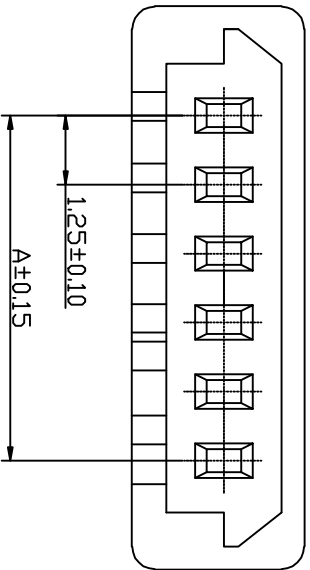

深圳市康利通电子科技有限公司

T O C E R A N C E

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T O C E R A N C E		
CHECKED BY	DATE	SCALE			
	2016-04-25	1:1	VER No	SIZE	

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART No	H1253-NP
-----	---------	----------

4

4

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-25	李国常

SPECIFICATIONS


- Voltage rating: 150V AC,DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 30MΩ max

TERMINAL


- Part No: T1253PT
- Applicable wire: AWG#26-#32
- Material: Phosphor Bronze
- Finish: Tin Plated

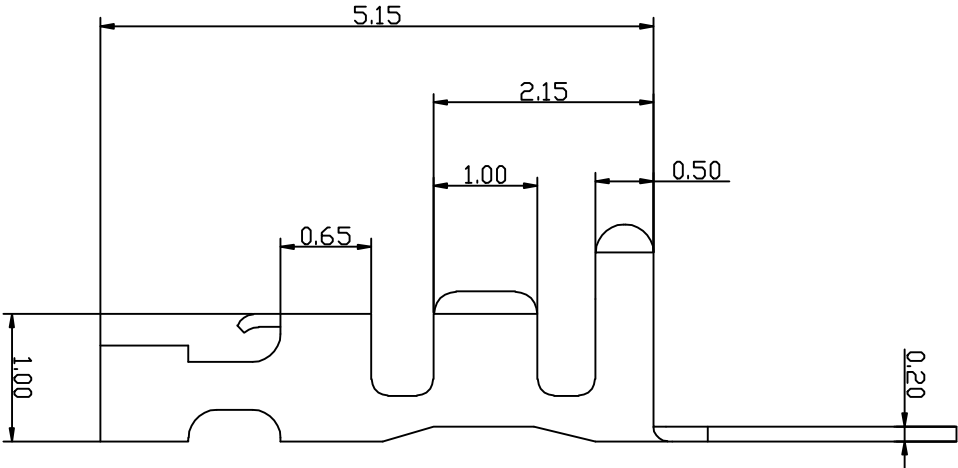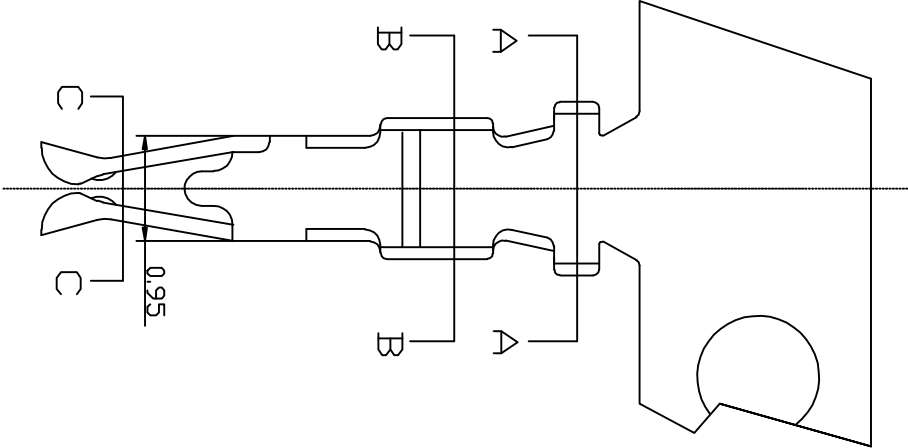

SEC:A-A



SEC:B-B



SEC:C-C



深圳市康利通电子科技有限公司

成品规格图			TOLERANCE	
TITLE			0±0.30	
CHECKED BY	DATE	SCALE	.00±0.25	
2016-04-25	1:1		.000±0.015	
DRAWN BY	UNIT:mm		VER No	SIZE
李国常	PART No	T1253PT	A	A4

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-25	李国常




SPECIFICATIONS

- Voltage rating: 150V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W1253SR-NP
- Poles: 02-30
- Material: Nylon 6T UL94V-0
- Ter Material: Brass /Tin-plated

Part No	Dimensions (mm)	
	A	B
W1253SR-02	1.25	7.45
W1253SR-03	2.50	8.70
W1253SR-04	3.75	9.95
W1253SR-05	5.00	11.20
W1253SR-06	6.25	12.45
W1253SR-07	7.50	13.70
W1253SR-08	8.75	14.95
W1253SR-09	10.00	16.20
W1253SR-10	11.25	17.45
W1253SR-11	12.50	18.70
W1253SR-12	13.75	19.95
W1253SR-13	15.00	21.20
W1253SR-14	16.25	22.45
W1253SR-15	17.50	23.70
W1253SR-20	23.75	29.95
W1253SR-25	30.00	36.20
W1253SR-30	36.25	42.45

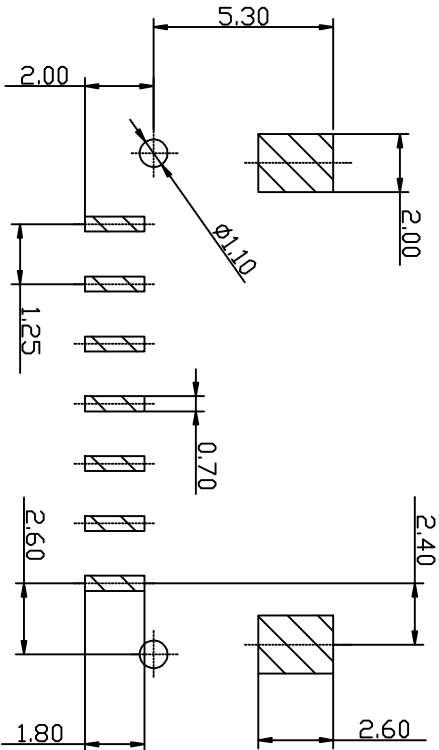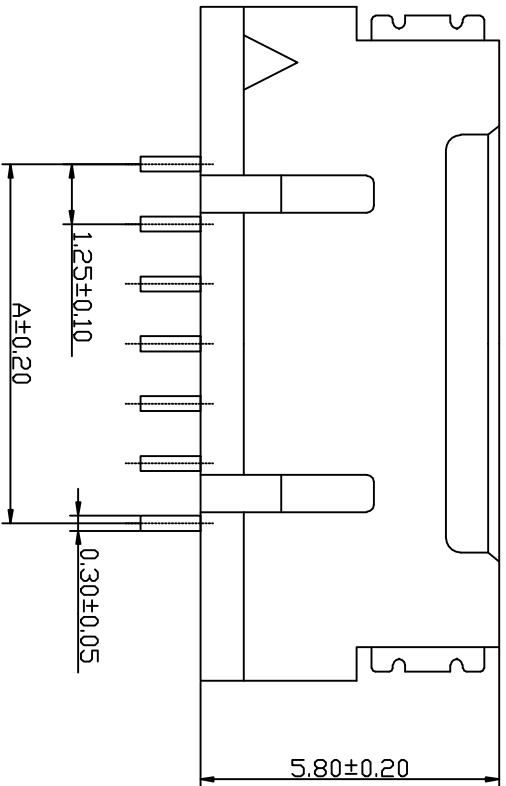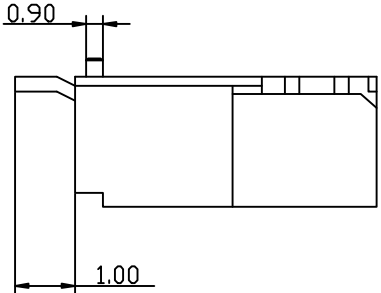

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No

SIZE

A

A4

李国常

PART No

W1253SR-NP

B

C

D

E

F

4

4

1

B


C

E



公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-25	李国常

4

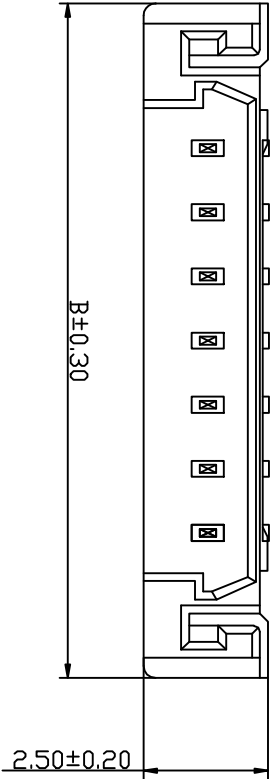


4

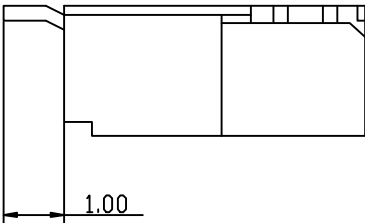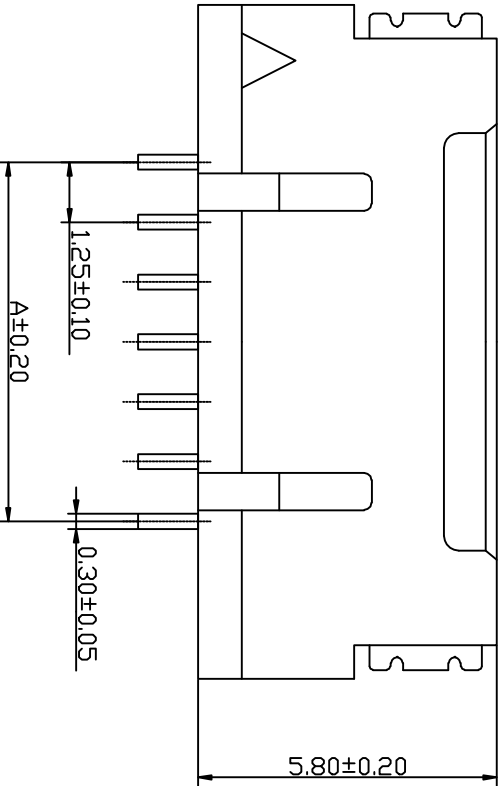

- SPECIFICATIONS**
- Voltage rating: 150V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 500MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max
- WAFER**
- Part No: W1253SR-NP-1
 - Poles: 02-30
 - Material: Nylon 6T UL94V-0
 - Ter Material: Brass /Tin-plated

Part No	Dimensions (mm)	
	A	B
W1253SR-02-1	1.25	7.45
W1253SR-03-1	2.50	8.70
W1253SR-04-1	3.75	9.95
W1253SR-05-1	5.00	11.20
W1253SR-06-1	6.25	12.45
W1253SR-07-1	7.50	13.70
W1253SR-08-1	8.75	14.95
W1253SR-09-1	10.00	16.20
W1253SR-10-1	11.25	17.45
W1253SR-11-1	12.50	18.70
W1253SR-12-1	13.75	19.95
W1253SR-13-1	15.00	21.20
W1253SR-14-1	16.25	22.45
W1253SR-15-1	17.50	23.70
W1253SR-20-1	23.75	29.95
W1253SR-25-1	30.00	36.20
W1253SR-30-1	36.25	42.45

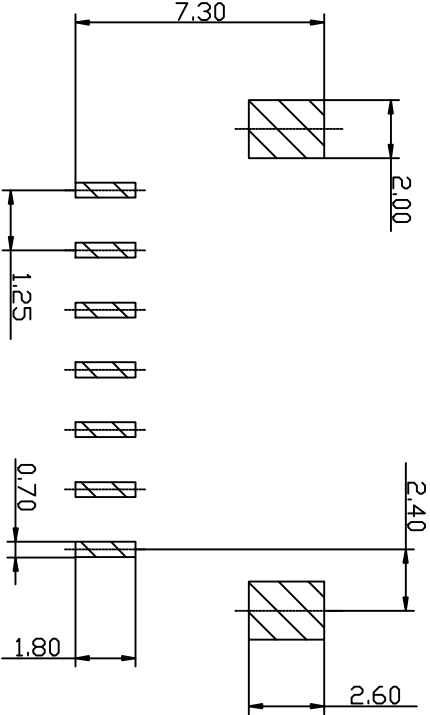

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	成品规格图		T OCERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-04-25	1:1		

DRAWN BY	UNIT:mm		A	A4
----------	---------	--	---	----

李国常	PART No	W1253SR-NP-1
-----	---------	--------------

B

C

D

E

F