

B






C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-15	李国常

4

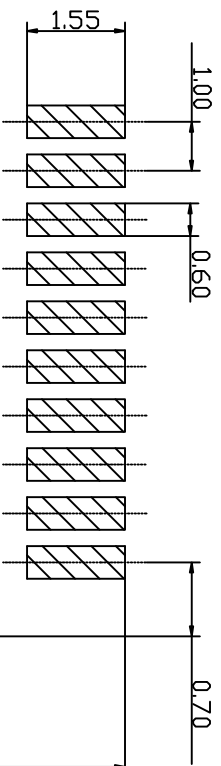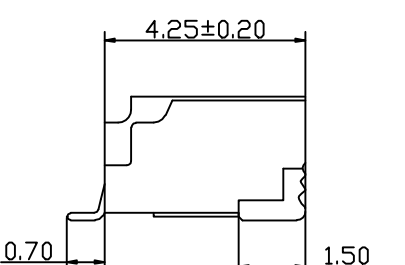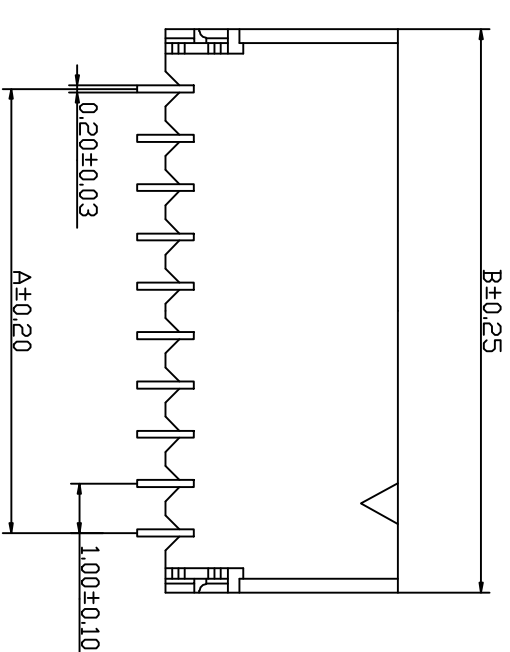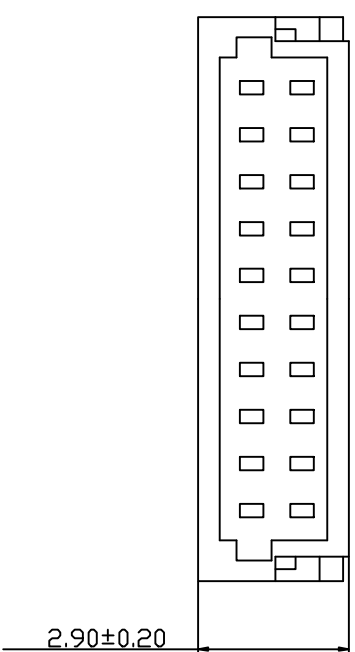

P.C.B LAYOUT

Part No	Dimensions (mm)	
	A	B
W1001SR-02	1.00	4.00
W1001SR-03	2.00	5.00
W1001SR-04	3.00	6.00
W1001SR-05	4.00	7.00
W1001SR-06	5.00	8.00
W1001SR-07	6.00	9.00
W1001SR-08	7.00	10.00
W1001SR-09	8.00	11.00
W1001SR-10	9.00	12.00
W1001SR-11	10.00	13.00
W1001SR-12	11.00	14.00
W1001SR-13	12.00	15.00
W1001SR-14	13.00	16.00
W1001SR-15	14.00	17.00
W1001SR-16	15.00	18.00
W1001SR-17	16.00	19.00
W1001SR-18	17.00	20.00
W1001SR-19	18.00	21.00
W1001SR-20	19.00	22.00
W1001SR-24	23.00	26.00

- SPECIFICATIONS**
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -40°C~+85°C
 - Contact resistance: 20MΩ max
- WAFER
- Part No: W1001SR-NP
 - Poles: 02-24
 - Material: Nylon 6T UL94V-0
 - Ter Material: Phosphor Bronze /Tin-plated

KLT 深圳市康利通电子科技有限公司

成品规格图

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No SIZE

A A4

1

4

B

C

D

E

F

B





C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-15	李国常




4

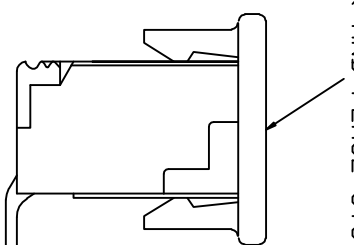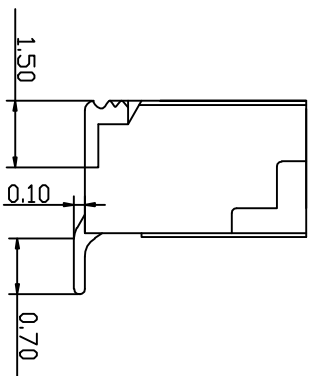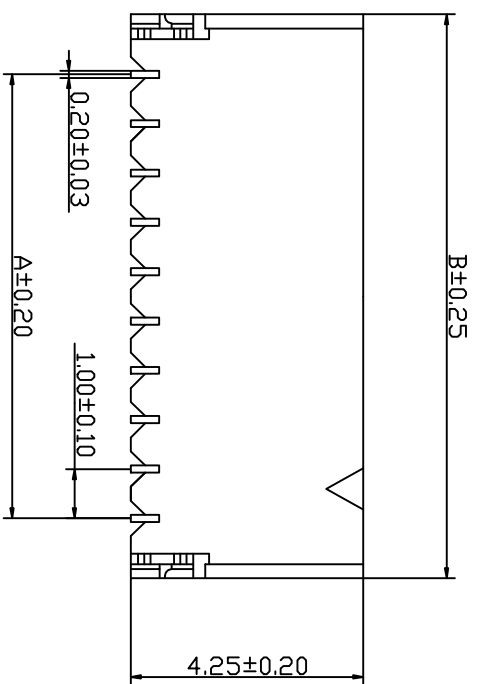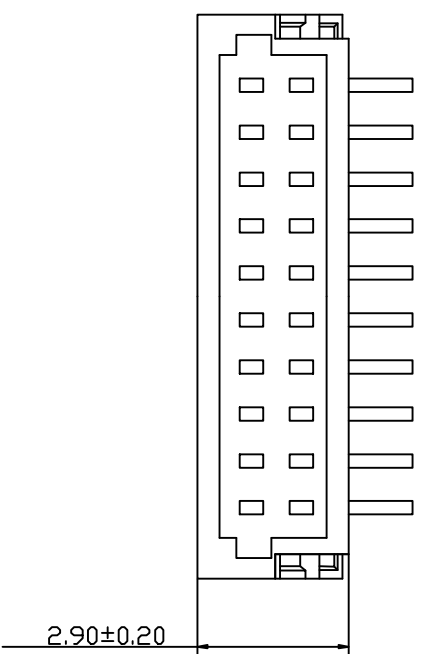

CAP
(FOR PICK AND PLACE SYSTEMS)

- SPECIFICATIONS**
- Voltage rating: 50V AC,DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max
- WAFER
- Part No: W1001SV-NP
 - Poles: 02-24
 - Material: Nylon 6T UL94V-0
 - Cap: Nylon 6T UL94V-0
 - Ter Material: Phosphor Bronze /Tin-plated

Part No	Dimensions (mm)	
	A	B
W1001SV-02	1.00	4.00
W1001SV-03	2.00	5.00
W1001SV-04	3.00	6.00
W1001SV-05	4.00	7.00
W1001SV-06	5.00	8.00
W1001SV-07	6.00	9.00
W1001SV-08	7.00	10.00
W1001SV-09	8.00	11.00
W1001SV-10	9.00	12.00
W1001SV-11	10.00	13.00
W1001SV-12	11.00	14.00
W1001SV-13	12.00	15.00
W1001SV-14	13.00	16.00
W1001SV-15	14.00	17.00
W1001SV-16	15.00	18.00
W1001SV-17	16.00	19.00
W1001SV-18	17.00	20.00
W1001SV-19	18.00	21.00
W1001SV-20	19.00	22.00
W1001SV-24	23.00	26.00

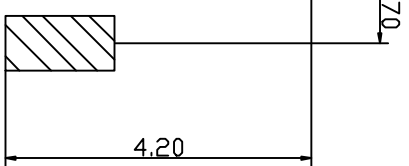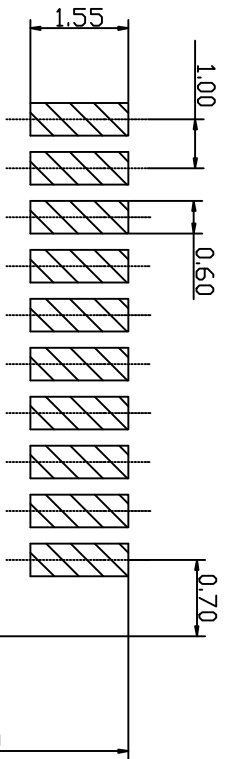

P.C.B LAYOUT

KLIT 深圳市康利通电子科技有限公司

成品规格图

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		SCALE		1:1	VER No	A	SIZE	A4
CHECKED BY	DATE	2016-04-15	SCALE	1:1	VER No	A	SIZE	A4	
DRAWN BY	UNIT:mm								
李国常	PART No	W1001SV-NP							

B

C

D

E

F

4

1