

公差表




REV	ECN NO	L O C A T I O N S	D E S C R I P T I O N	D A T E	C H A N G E R
A			新版本	2016-06-08	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 10A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
 - Contact resistance: 10M Ω max
- HOUSING**
- Part No: HS081-04
 - Material: Nylon 66 UL94V-2

HOUSING

- Part No: H5081-04
- Material: Nylon 66 UL94V-2

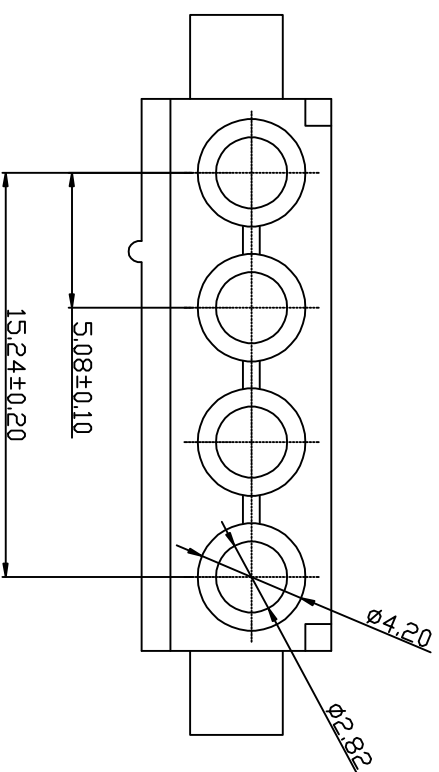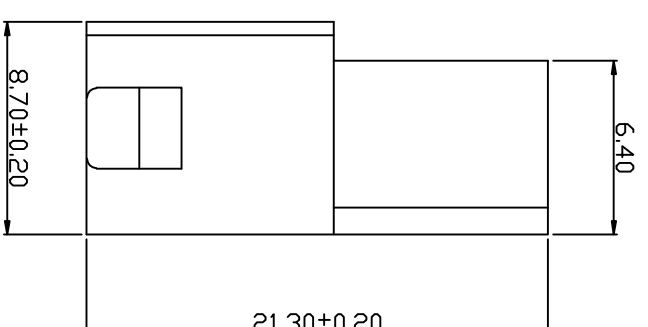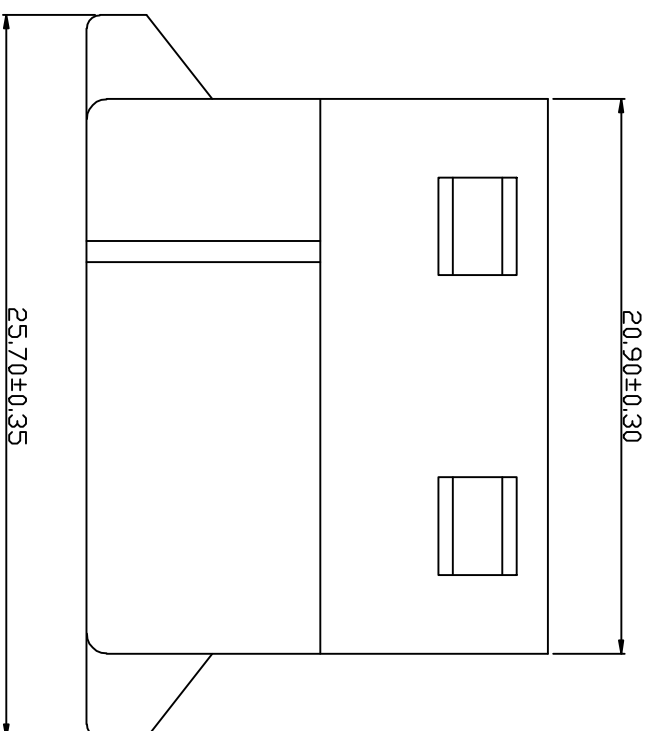

 深圳市康利通电子科技有限公司		T O C E R A N C E	
		0±0.30	
		.0±0.25	
		.00±0.20	
		.000±0.015	
T I T L E	成 品 规 格 图		
C H E C K E D B Y	D A T E	S C A L E	
	2016-06-08	1:1	
D R A W N B Y	U N I T : m m		
		VER No	SIZE
		A	A4
李国常	P A R T N o	H5081-04	

D

二

4

4

1

B

C

E



公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-08	李国常


SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 10A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+105℃
 - Contact resistance: 10MΩ max
- HOUSING
- Part No: H5082-04
 - Material: Nylon 66 UL94V-2

4

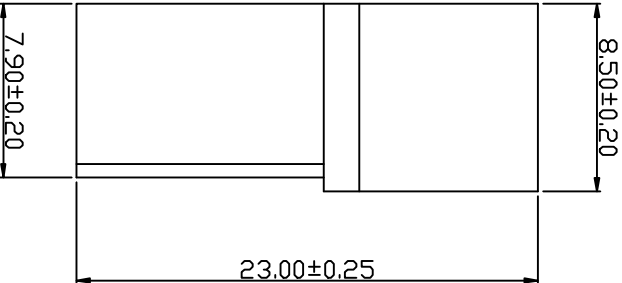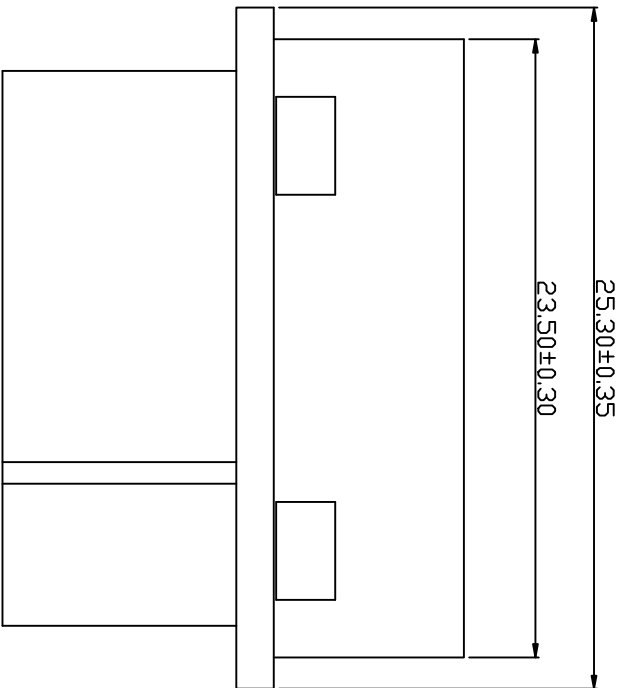

4

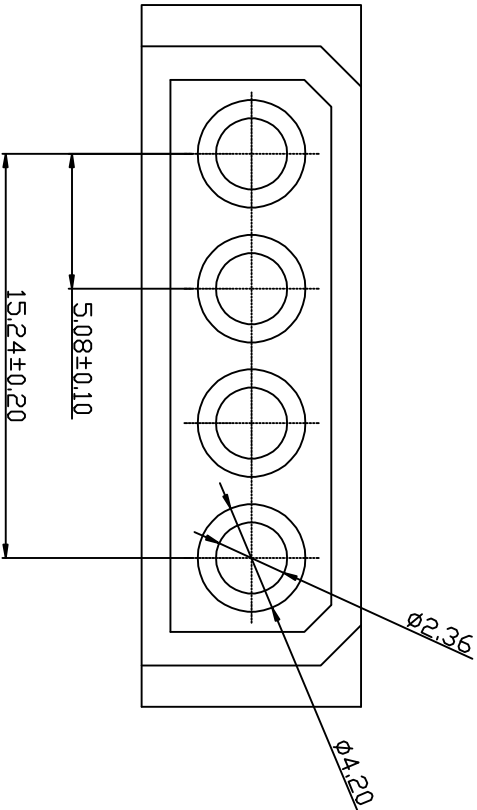

深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		Tolerance		
CHECKED BY	DATE	SCALE	VER No	SIZE	
DRAWN BY	UNIT:mm	1:1	A	A4	
李国常	PART No	H5082-04			

B

C

D

E

F

1

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-08	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

TERMINAL


- Part No: T5081BT
- Applicable wire: AWG#18-#24
- Material: Brass
- Finish: Tin plated

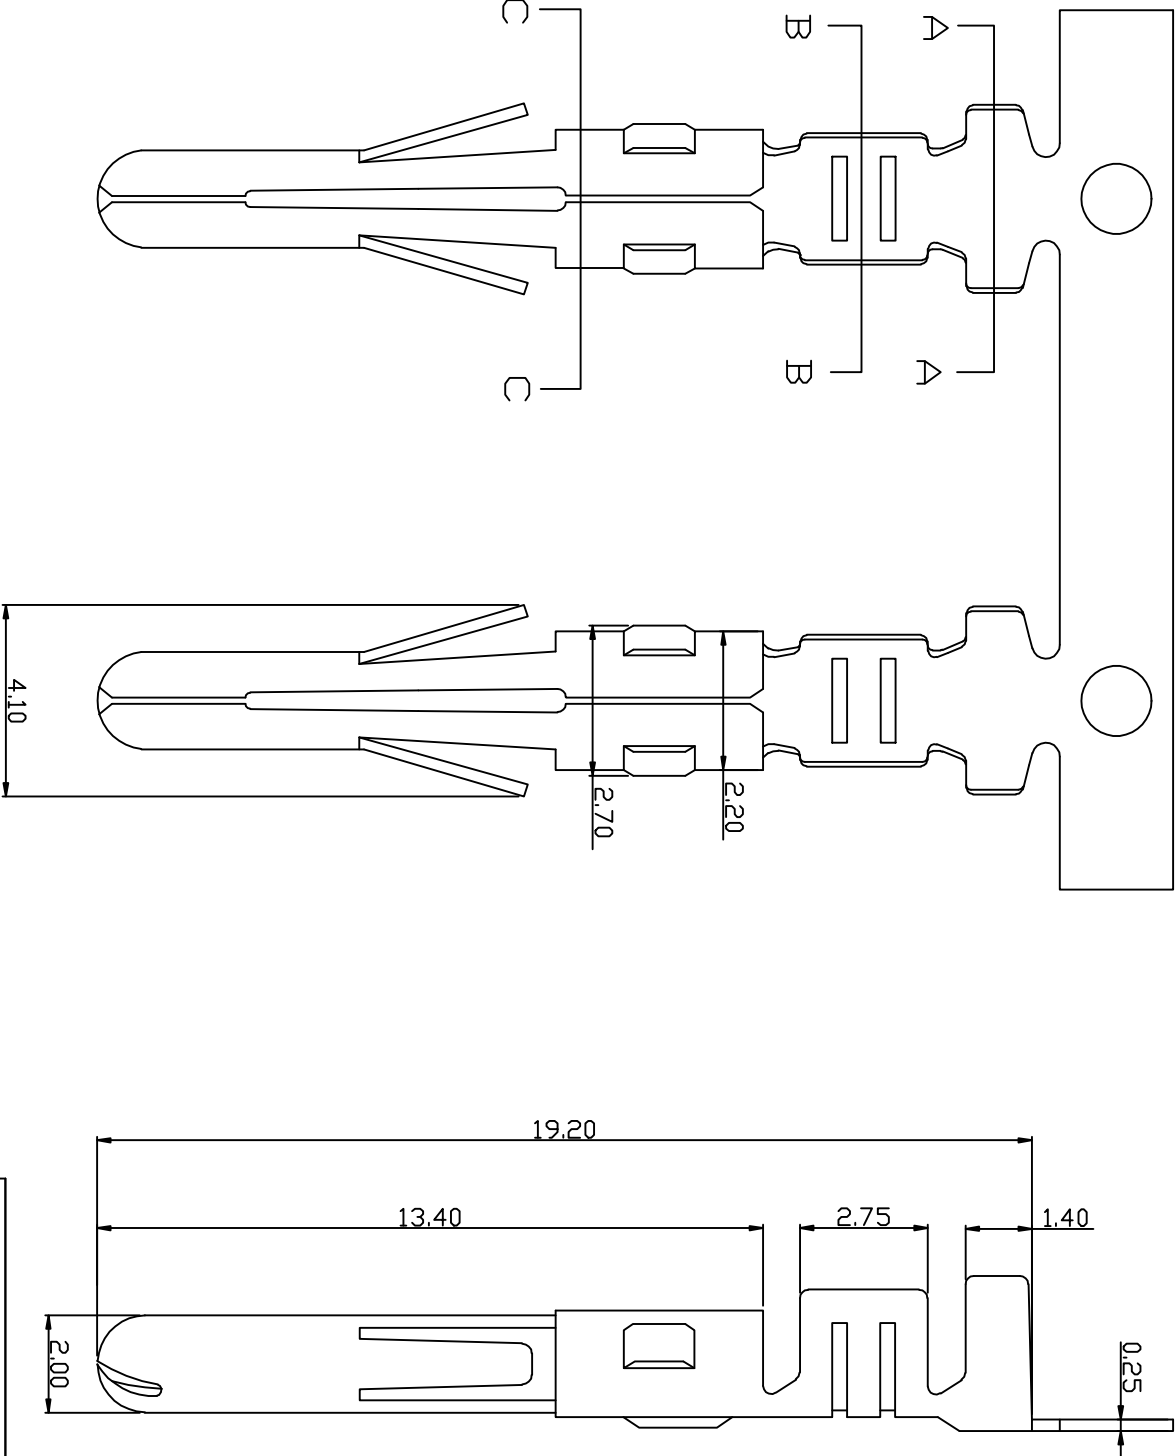

SEC: A-A



SEC: B-B



SEC: C-C



深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

• 0±0.25

• 00±0.20

• 000±0.015

成品规格图

TITLE				
CHECKED BY	DATE	SCALE	VER No	SIZE
DRAWN BY	UNIT:mm		A	A4
李国常	PART No	T5081BT		

B

C

D

E

F

4

4

1

B

C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-08	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

TERMINAL

- Part No: T5082BT
- Applicable wire: AWG#18-#24
- Material: Brass
- Finish: Tin plated

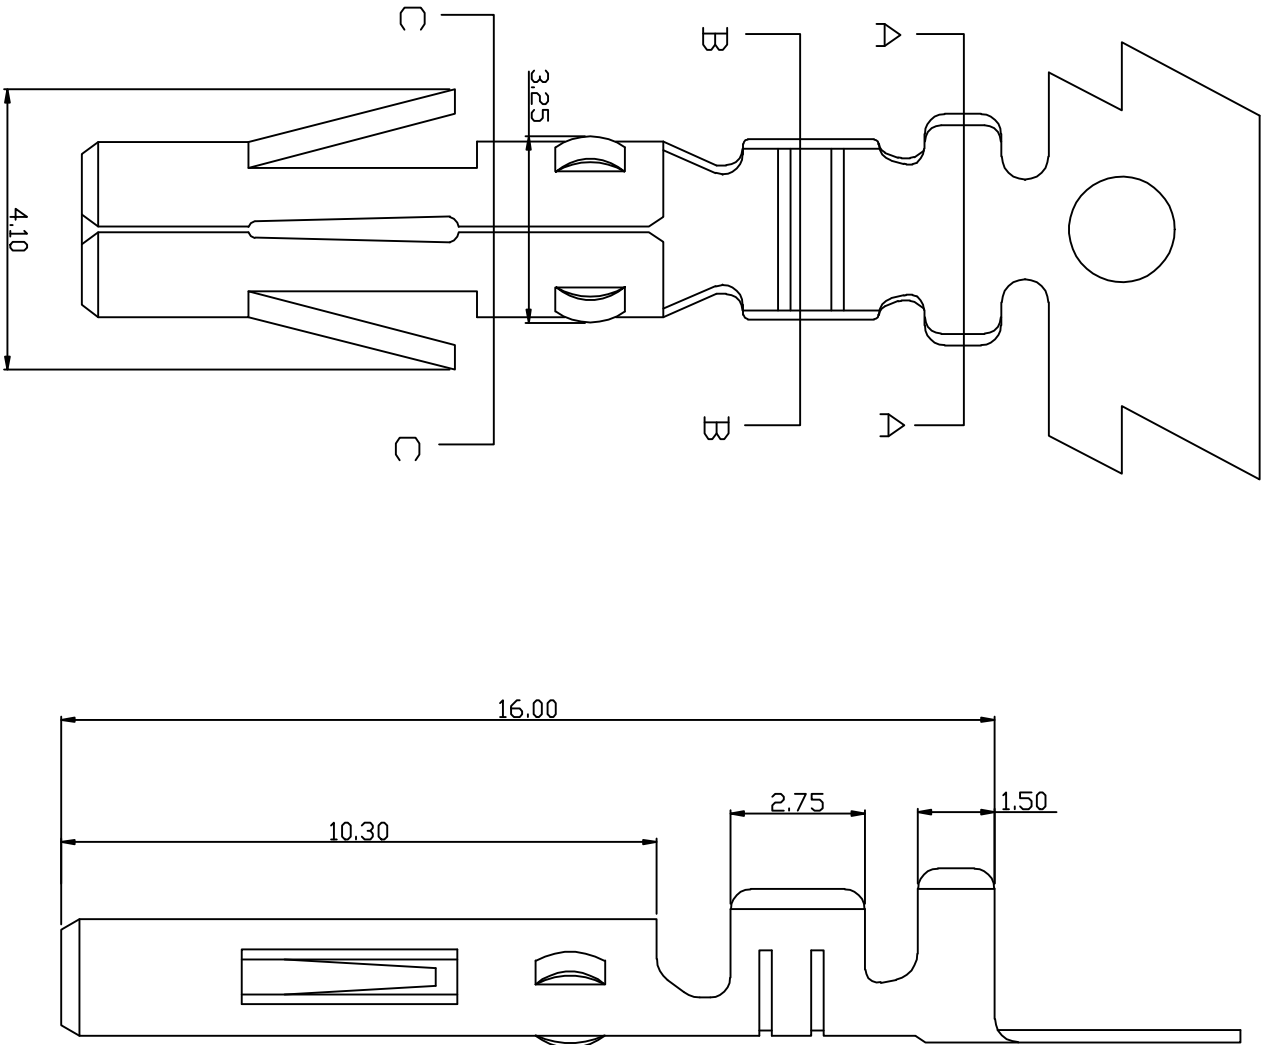

SEC:A-A

SEC:B-B

SEC:C-C

 深圳市康利通电子科技有限公司			T OCERANCE		
T ITLE			成品规格图		
CHECKED BY			DATE		
2016-06-08			SCALE		
1:1			VER No		
DRAWN BY			UNIT:mm		
李国常			PART No		
T5082BT			SIZE		
A			A4		

4

4

B

C

D

E

F