

B



C

E


公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-02	李国常

4

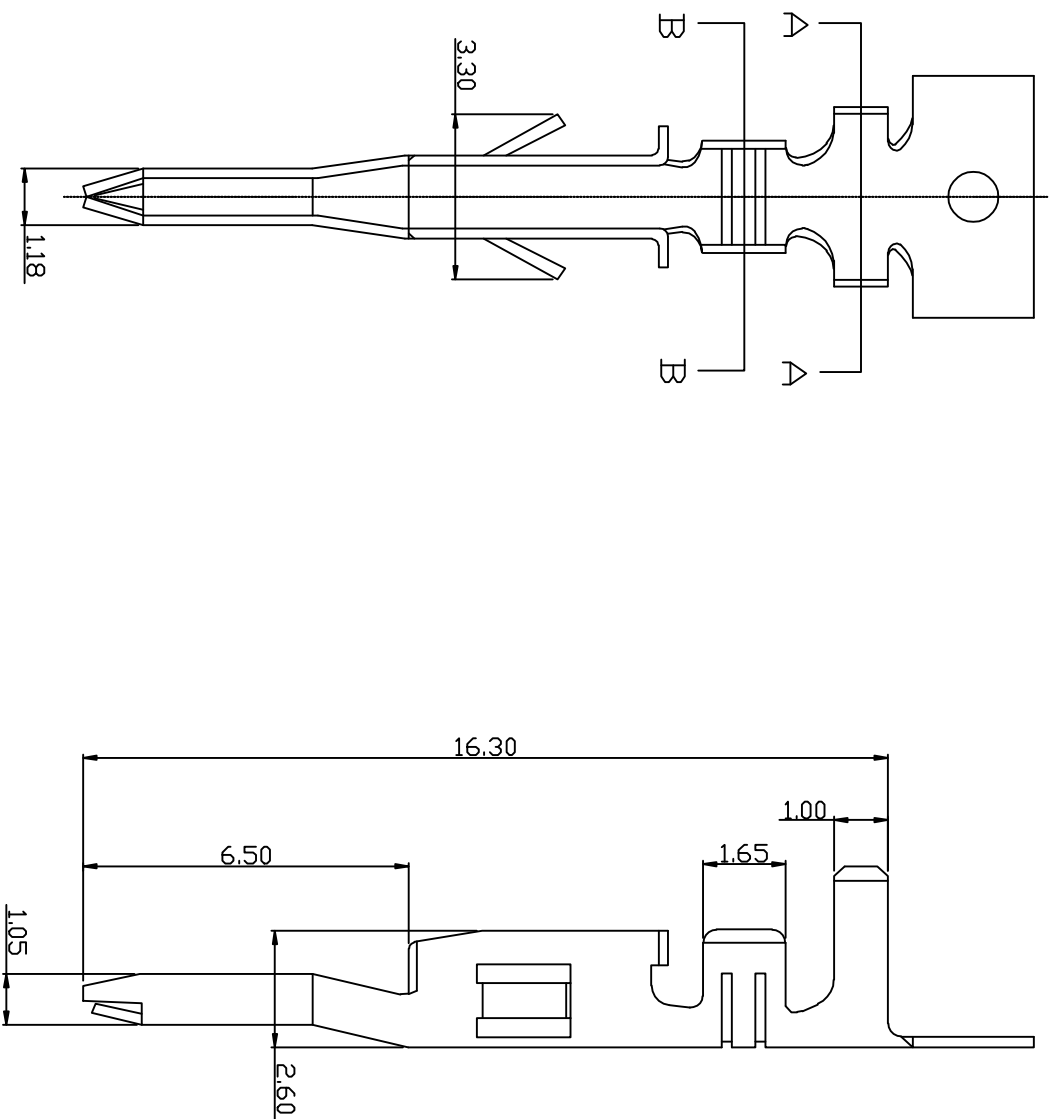

SEC: A-A



SEC: B-B

4

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 10MΩ max
- TERMINAL**
- Part No: T4201BT
 - Applicable wire: AWG#18-#24
 - Material: Brass
 - Finish: Tin plated

KLT 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-06-02	1:1		
DRAWN BY	UNIT:mm		A	A4
李国常	PART No	T4201BT		

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-02	李国常



■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max


■ HOUSING

- Part No: H4202-NP
- Poles: 02-12
- Material: Nylon 66 UL94V-2

4

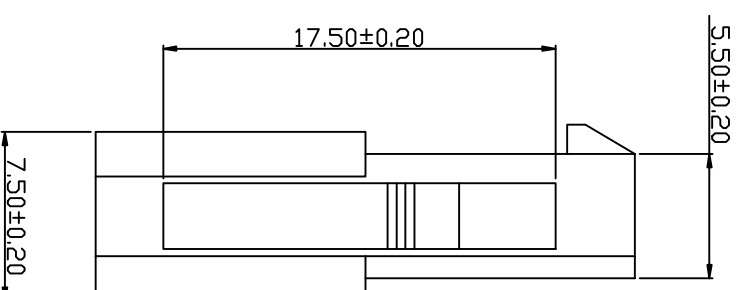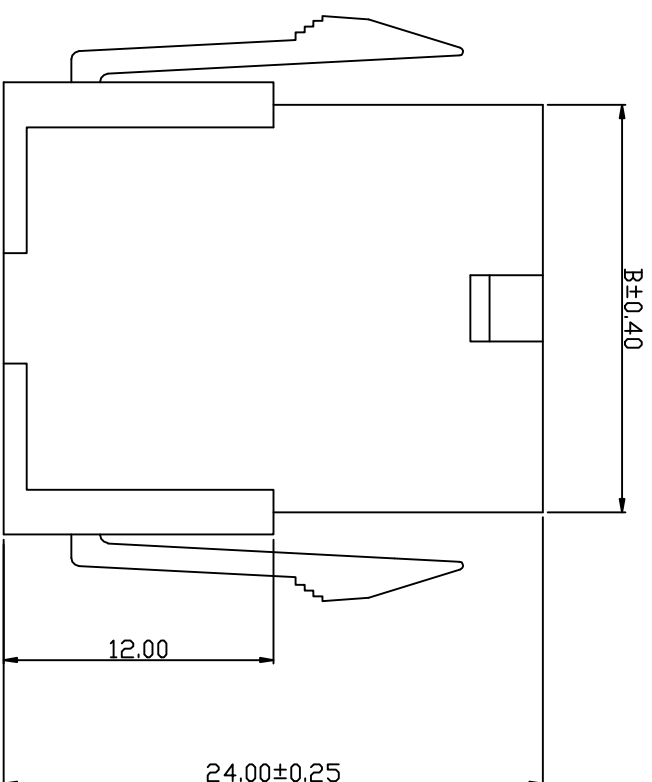

Part No	Dimensions (mm)	
	A	B
H4202-02	4.20	9.80
H4202-03	8.40	14.00
H4202-04	12.60	18.20
H4202-05	16.80	22.40
H4202-06	21.00	26.60
H4202-07	25.20	30.80
H4202-08	29.40	35.00
H4202-09	33.60	39.20
H4202-10	37.80	43.40
H4202-11	42.00	47.60
H4202-12	46.20	51.80

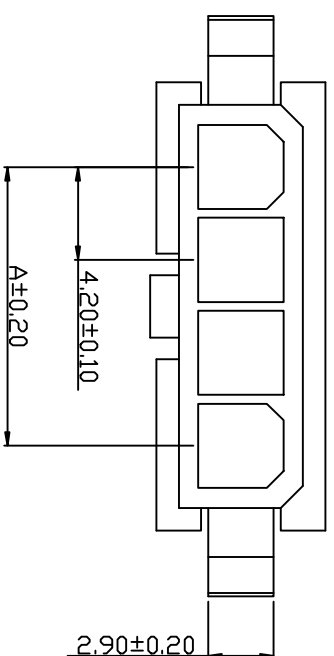

B

C

D

E

F

KLT 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

4

TITLE	成品规格图		TOLERANCE	
CHECKED BY	DATE	SCALE	0±0.30	
	2016-06-02	1:1	.0±0.25	
DRAWN BY	UNIT:mm		VER No	SIZE
李国常	PART No		A	A4
		H4202-NP		

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-02	李国常



SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max


HOUSING

- Part No: H4202N-NP
- Poles: 02-12
- Material: Nylon 66 UL94V-2

4

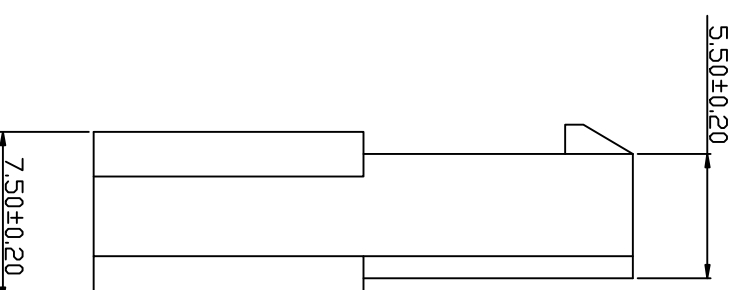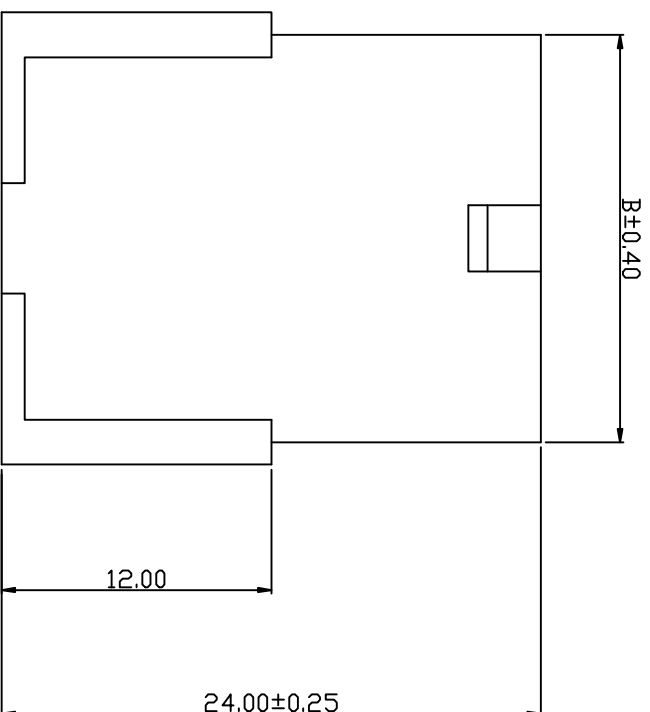

Part No	Dimensions (mm)	
	A	B
H4202N-02	4.20	9.80
H4202N-03	8.40	14.00
H4202N-04	12.60	18.20
H4202N-05	16.80	22.40
H4202N-06	21.00	26.60
H4202N-07	25.20	30.80
H4202N-08	29.40	35.00
H4202N-09	33.60	39.20
H4202N-10	37.80	43.40
H4202N-11	42.00	47.60
H4202N-12	46.20	51.80

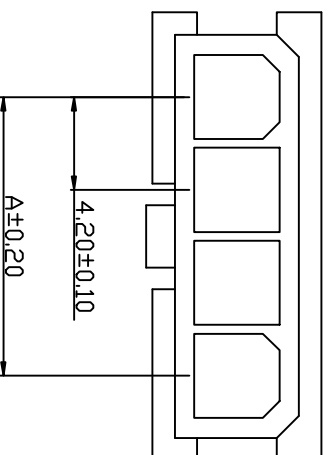

KLIT 深圳市康利通电子科技有限公司

成品规格图

Tolerance

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	成品规格图		Tolerance	
CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-06-02	1:1	A	A4

DRAWN BY	UNIT:mm	PART No		H4202N-NP	
李国常					

4

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-02	李国常



SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max


HOUSING

- Part No: H4202N-2*NP
- Poles: 02-24
- Material: Nylon 66 UL94V-2

4

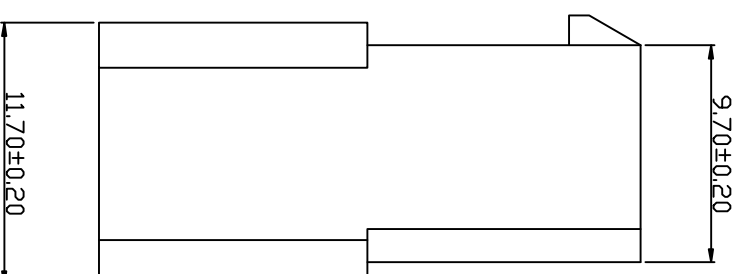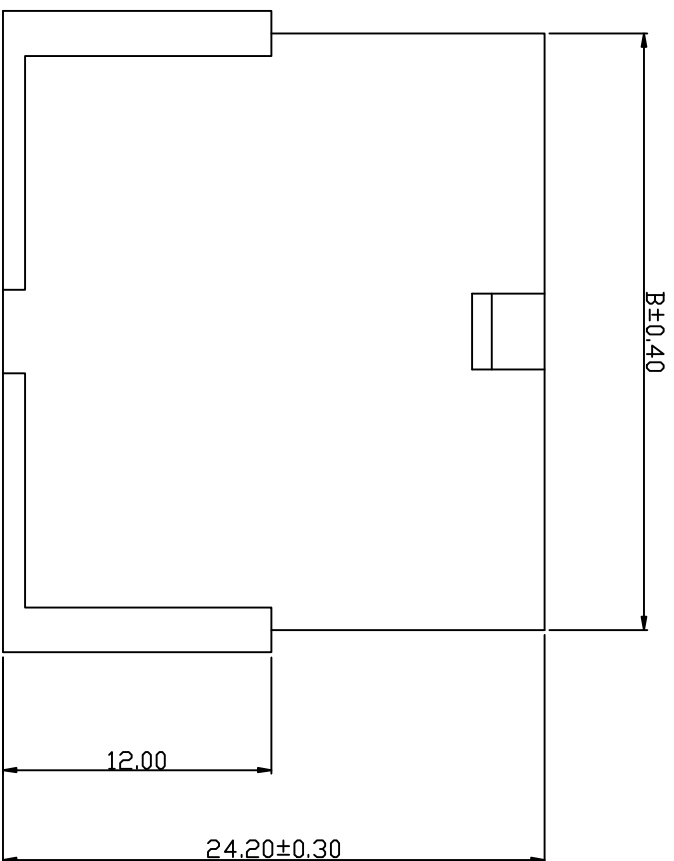

Part No	Dimensions (mm)	
	A	B
H4202N-2*01	—	5.60
H4202N-2*02	4.20	9.80
H4202N-2*03	8.40	14.00
H4202N-2*04	12.60	18.20
H4202N-2*05	16.80	22.40
H4202N-2*06	21.00	26.60
H4202N-2*07	25.20	30.80
H4202N-2*08	29.40	35.00
H4202N-2*09	33.60	39.20
H4202N-2*10	37.80	43.40
H4202N-2*11	42.00	47.60
H4202N-2*12	46.20	51.80

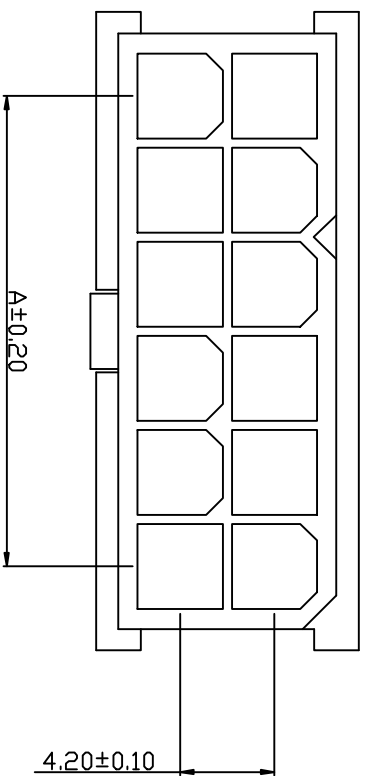

KLT 深圳市康利通电子科技有限公司

成品规格图

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		SCALE		1:1	VER No	A	SIZE	A4
CHECKED BY	DATE	2016-06-02	SCALE	1:1	VER No	A	SIZE	A4	
DRAWN BY	UNIT:mm								
李国常	PART No	H4202N-2*NP							

B

C

D

E

F

1

4

B


C

E


公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-02	李国常

B±0.40

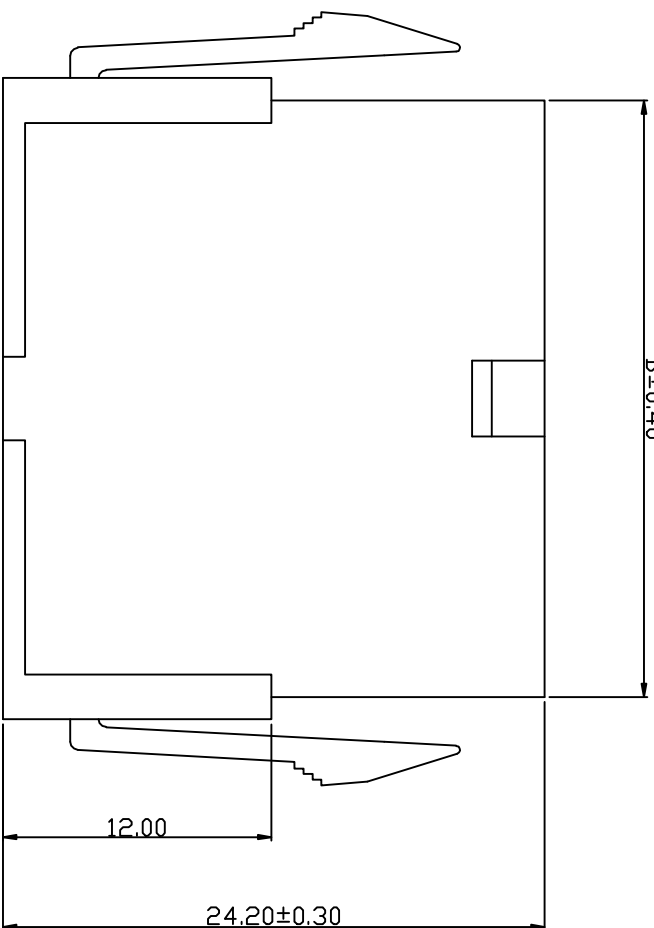


4

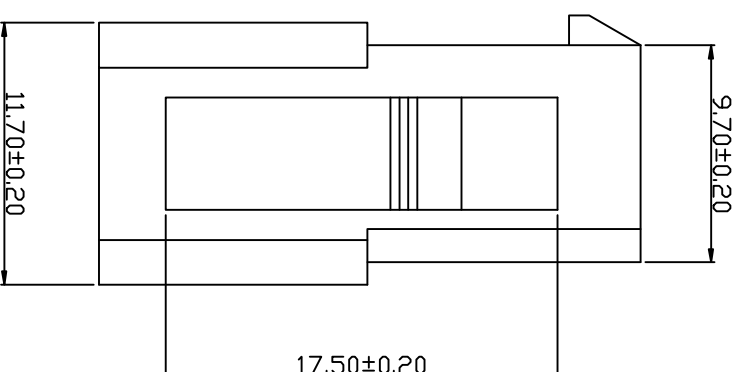

4

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40°C~+85°C
 - Contact resistance: 10MΩ max
- HOUSING**
- Part No: H4202-2*NP
 - Poles: 02-24
 - Material: Nylon 66 UL94V-2

Part No	Dimensions (mm)	
	A	B
H4202-2*01	—	5.60
H4202-2*02	4.20	9.80
H4202-2*03	8.40	14.00
H4202-2*04	12.60	18.20
H4202-2*05	16.80	22.40
H4202-2*06	21.00	26.60
H4202-2*07	25.20	30.80
H4202-2*08	29.40	35.00
H4202-2*09	33.60	39.20
H4202-2*10	37.80	43.40
H4202-2*11	42.00	47.60
H4202-2*12	46.20	51.80

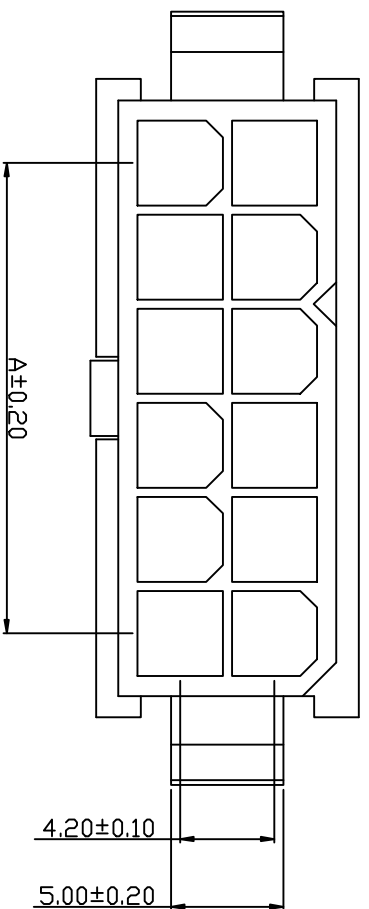

KLT 深圳市康利通电子科技有限公司

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

成品规格图

TITLE

CHECKED BY

DATE

SCALE

2016-06-02


1:1

VER No

SIZE

DRAWN BY

UNIT:mm



A

A4

李国常

PART No

H4202-2*NP

B

C

D

E

F

1