

B


C

E



公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-06-04	李国常

4

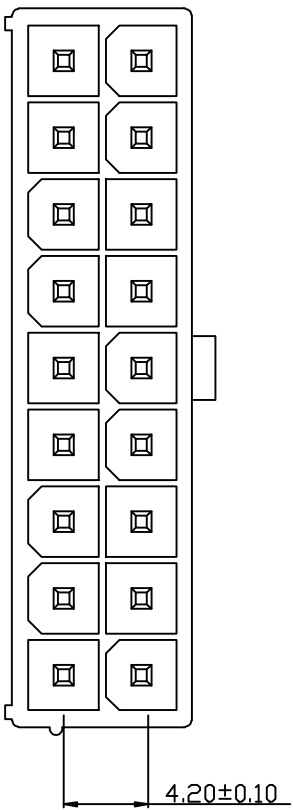


4

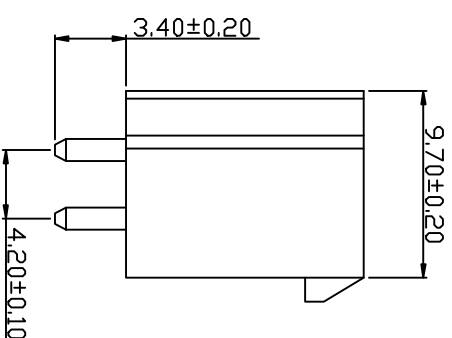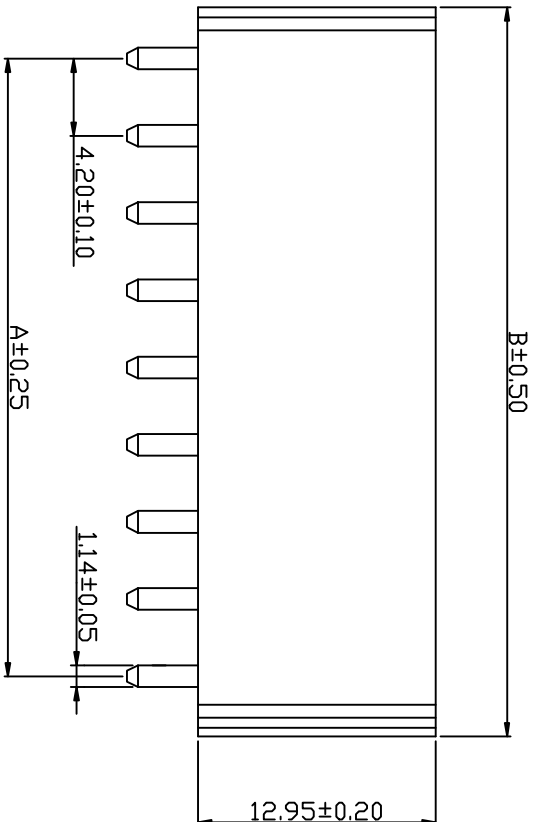

Part No	Dimensions (mm)	
	A	B
W4202V-2*01	—	5.60
W4202V-2*02	4.20	9.80
W4202V-2*03	8.40	14.00
W4202V-2*04	12.60	18.20
W4202V-2*05	16.80	22.40
W4202V-2*06	21.00	26.60
W4202V-2*07	25.20	30.80
W4202V-2*08	29.40	35.00
W4202V-2*09	33.60	39.20
W4202V-2*10	37.80	43.40
W4202V-2*11	42.00	47.60
W4202V-2*12	46.20	51.80

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -40℃~+85℃
  - Contact resistance: 10MΩ max
- WAFER**
- Part No: W4202V-2\*NP
  - Poles: 02-24
  - Material: Nylon 66 UL94V-2
  - Pin Material: Brass /Tin-plated

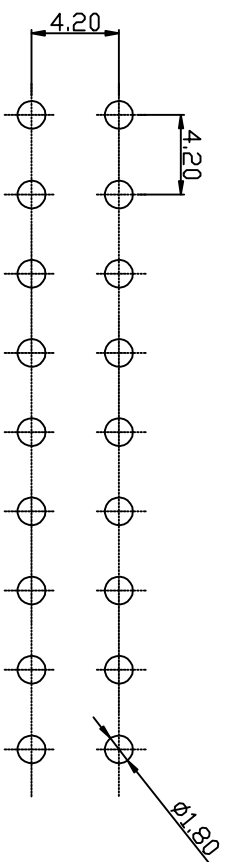

P.C.B LAYOUT

**KLT** 深圳市康利通电子科技有限公司

TOCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		SCALE		VER No	SIZE
CHECKED BY	DATE	2016-06-04	1:1			
DRAWN BY	UNIT:mm			A	A4	
李国常	PART No	W4202V-2*NP				

B

C

D

E

F

1