

B



C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-17	李国常

4

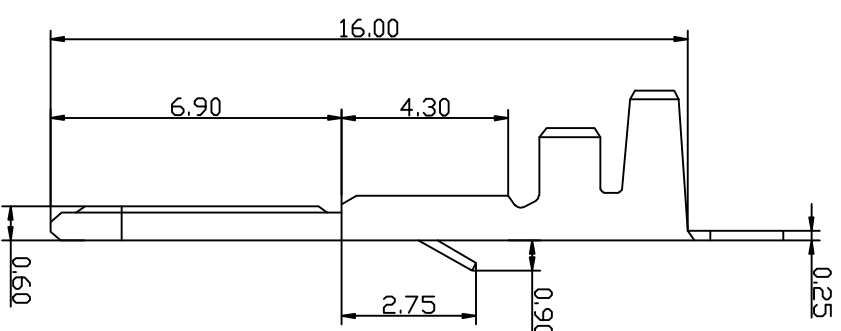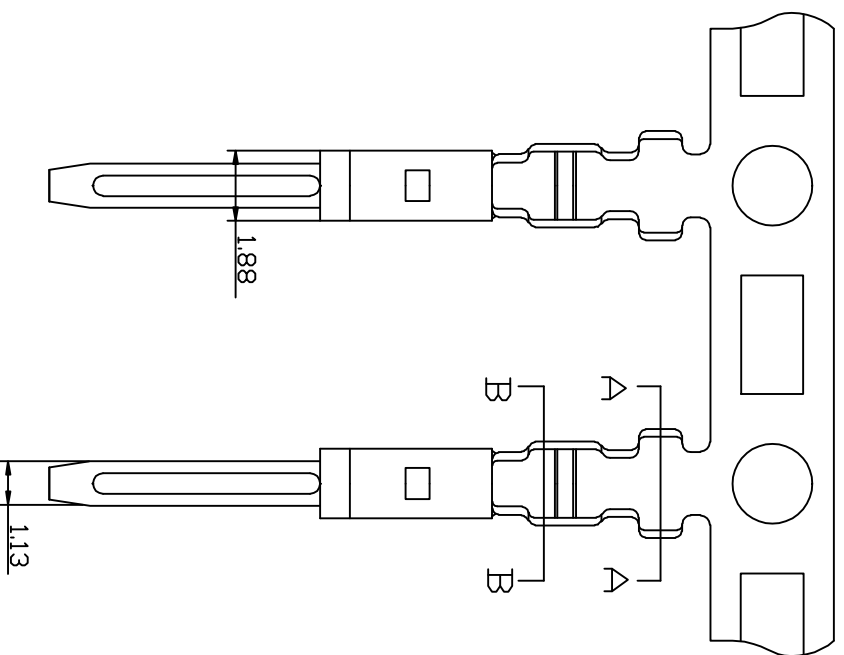


- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -40℃~+85℃
  - Contact resistance: 10MΩ max
- TERMINAL**
- Part No: T2514BT
  - Applicable wire: AWG#22-#28
  - Material: Brass
  - Finish: Tin plated

4



SEC: A-A



SEC: B-B

**KLT** 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-05-17	1:1		
DRAWN BY	UNIT:mm		A	A4
李国常	PART No	T2514BT		

B

C

D

E

F

B

C

E


公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-17	李国常

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 500MΩ min
  - Temperature range: -40℃~+85℃
  - Contact resistance: 10MΩ max
- HOUSING
- Part No: H2514-02
  - Material: Nylon 66 UL94V-2

4

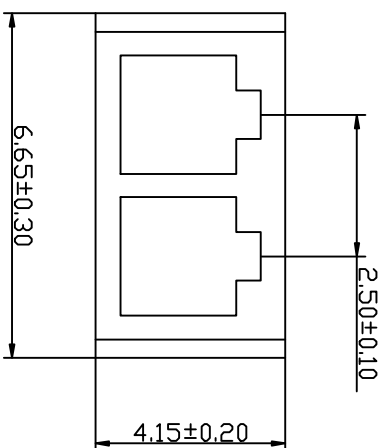

4

5.95±0.25

1  
2

9.85

19.30±0.20

**KLT** 深圳市康利通电子科技有限公司

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		TOLERANCE	
CHECKED BY	DATE	SCALE	VER No	SIZE
DRAWN BY	UNIT:mm		A	A4
李国常	2016-05-17	1:1		
PART No	H2514-02			

1

B

C

D

E

F