

B

C

E

公差表



REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

HOUSING

- Part No: H2517-NP
- Poles: 02-12
- Material: Nylon 66 UL94V-0

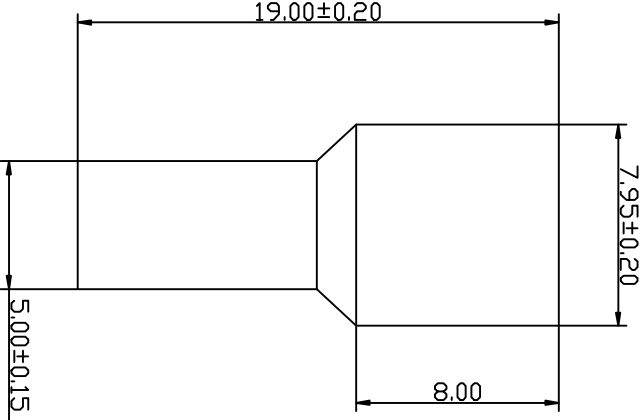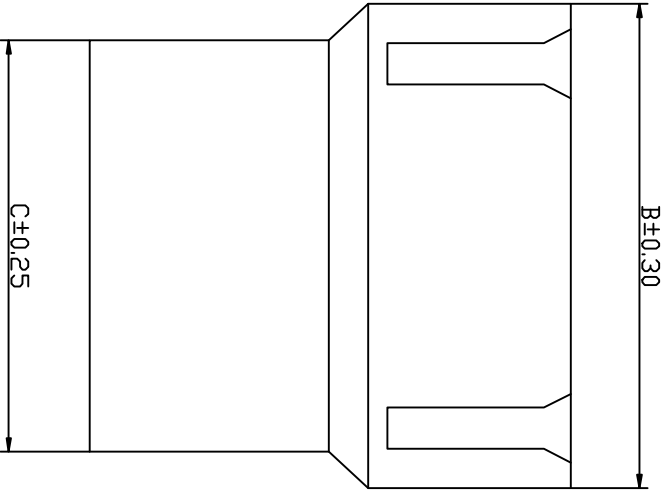

Part No	Dimensions (mm)		
	A	B	C
H2517-02	2.50	8.60	5.80
H2517-03	5.00	11.10	8.30
H2517-04	7.50	13.60	10.80
H2517-05	10.00	16.10	13.30
H2517-06	12.50	18.60	15.80
H2517-07	15.00	21.10	18.30
H2517-08	17.50	23.60	20.80
H2517-09	20.00	26.10	23.30
H2517-10	22.50	28.60	25.80
H2517-11	25.00	31.10	28.30
H2517-12	27.50	33.60	30.80

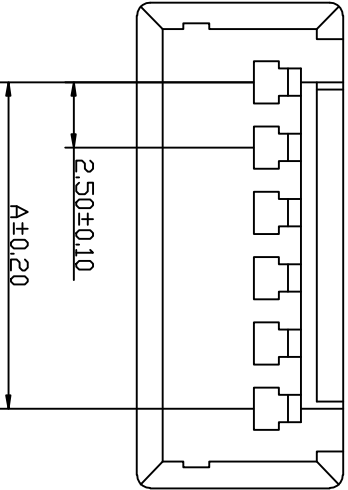

深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T OCERANCE		
CHECKED BY	DATE	SCALE			
	2016-05-19	1:1	VER No	SIZE	
DRAWN BY	UNIT:mm		A	A4	

李国常

PART No

H2517-NP

4

4

B

C

D

E

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-19	李国常

SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 10MΩ max

TERMINAL

- Part No: T2517BT
- Applicable wire: AWG#22-#28
- Material: Brass
- Finish: Tin plated

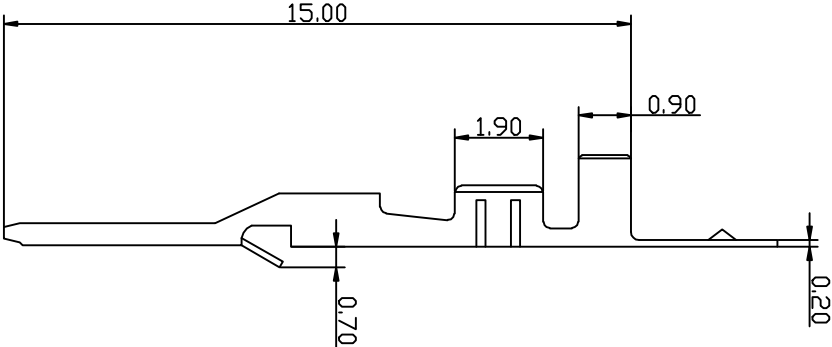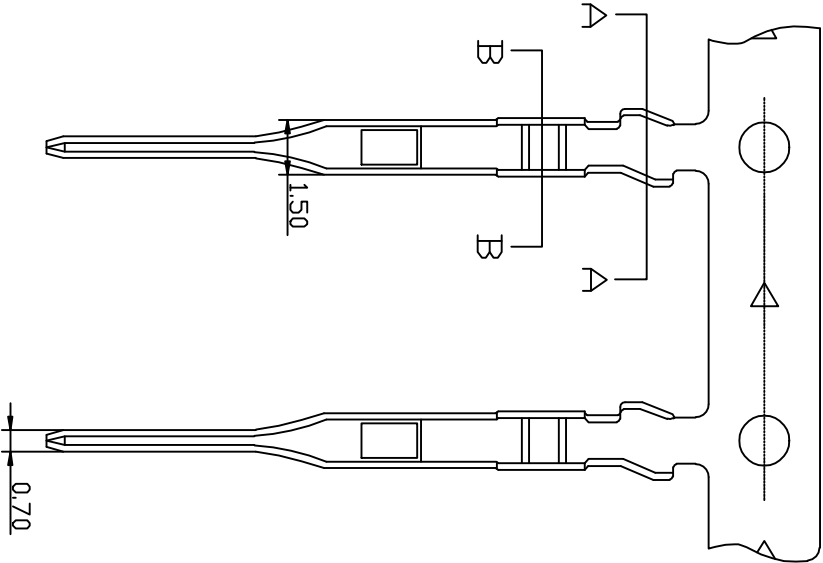

SEC: A-A



SEC: B-B



深圳市康利通电子科技有限公司

TITILE		成品规格图		T O C E R A N C E	
CHECKED BY		DATE		SCALE	
DRAWN BY		UNIT:mm		VER No	
李国常		PART No		T2517BT	

B

C

D

E

F