

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-16	李国常




SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

HOUSING

- Part No: H1502-NP
- Poles: 02-15
- Material: Nylon 66 UL94V-0

Part No	Dimensions (mm)	
	A	B
H1502-02	1.50	4.10
H1502-03	3.00	5.60
H1502-04	4.50	7.10
H1502-05	6.00	8.60
H1502-06	7.50	10.10
H1502-07	9.00	11.60
H1502-08	10.50	13.10
H1502-09	12.00	14.60
H1502-10	13.50	16.10
H1502-11	15.00	17.60
H1502-12	16.50	19.10
H1502-13	18.00	20.60
H1502-14	19.50	22.10
H1502-15	21.00	23.60

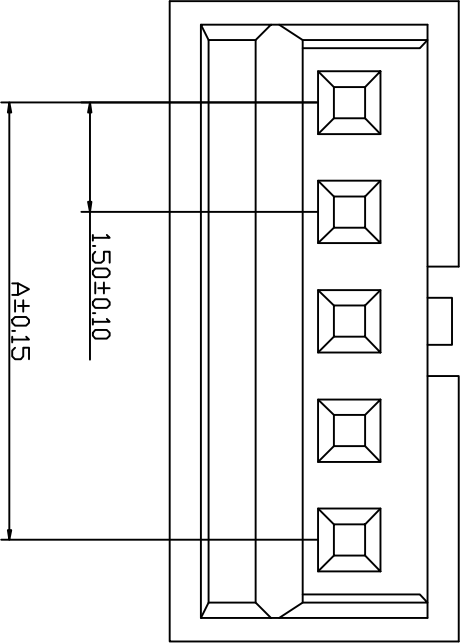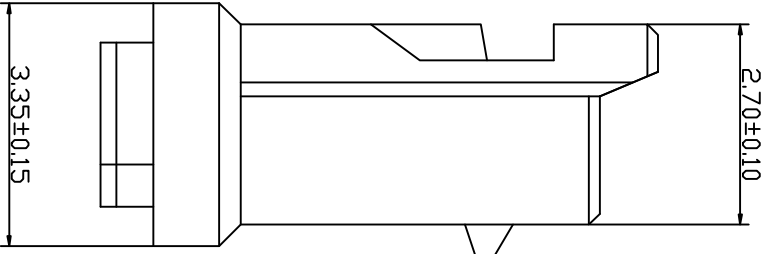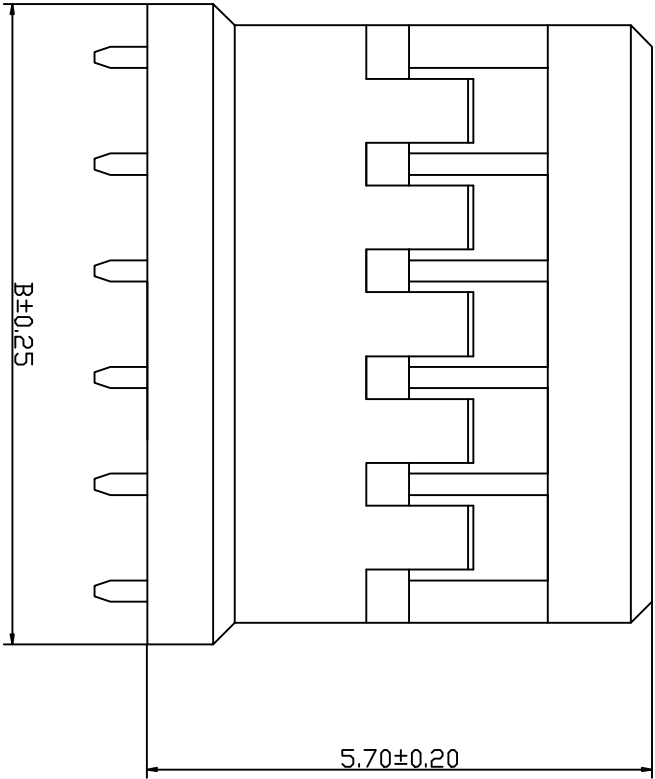

深圳市康利通电子科技有限公司

T OCERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图		T OCERANCE		
CHECKED BY	DATE	SCALE			
	2016-04-16	1:1	VER No	SIZE	
DRAWN BY	UNIT:mm		A	A4	

李国常

PART No

H1502-NP

4

4

B

C

D

E

F

B

C

F

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-16	李国常

SPECIFICATIONS


- Voltage rating: 100V AC,DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

TERMINAL


- Part No: T1502PT
- Applicable wire: AWG#24-#28
- Material: Phosphor Bronze
- Finish: Tin Plated

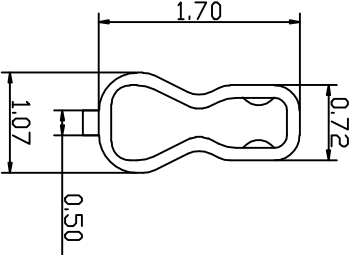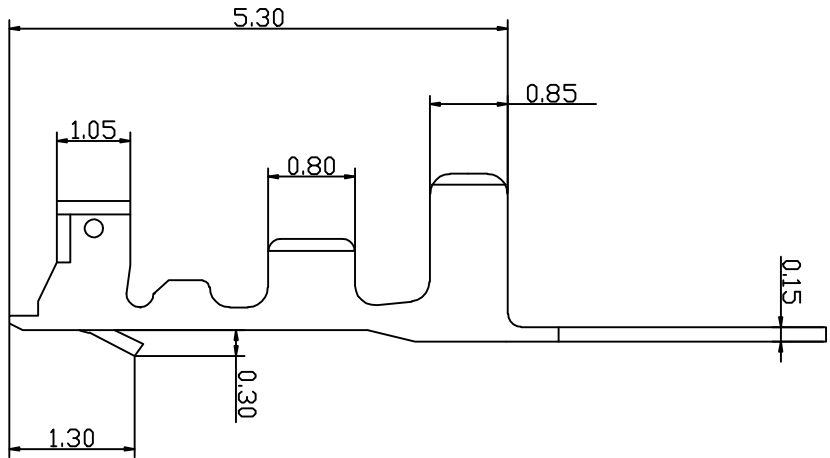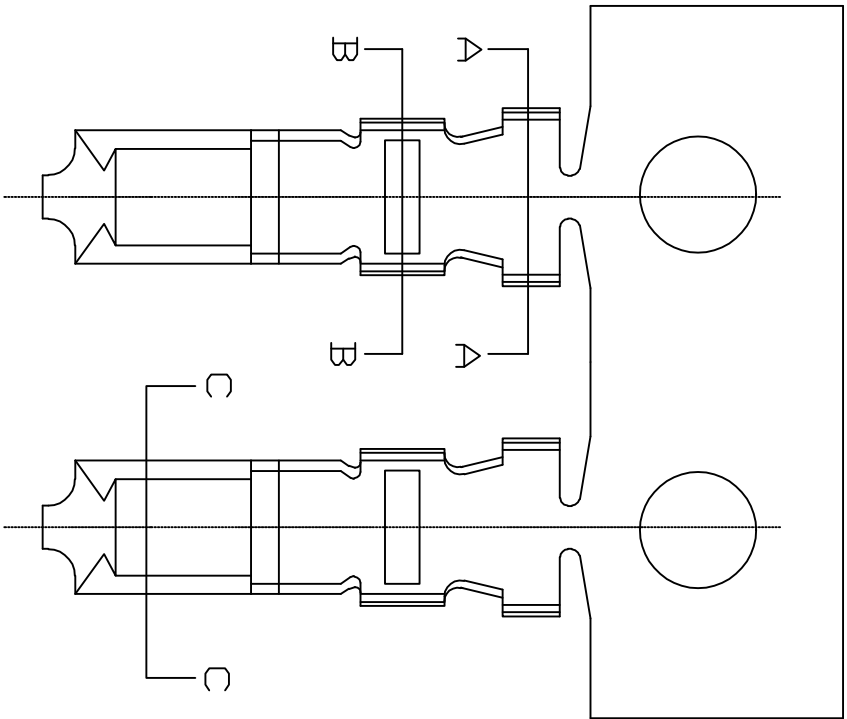

SEC: C-C



SEC: A-A



SEC: B-B

 深圳市康利通电子科技有限公司				TOLERANCE	
TITILE				成品规格图	
CHECKED BY				DATE	SCALE
DRAWN BY				UNIT:mm	VER No
李国常				PART No	SIZE
				T1502PT	

B

C

D

F

F

B

C

E

公差表




REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-16	李国常

SPECIFICATIONS


- Voltage rating: 350V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W1502SV-NP
- Poles: 02-15
- Material: Nylon 6T UL94V-0
- Ter Material: Phosphor Bronze /Tin-plated

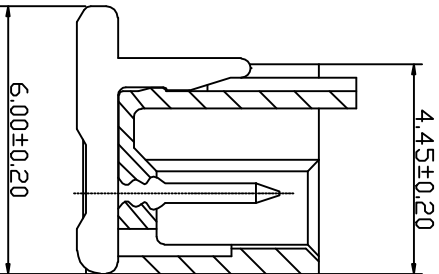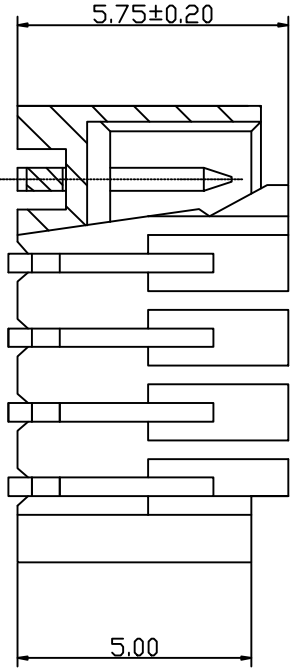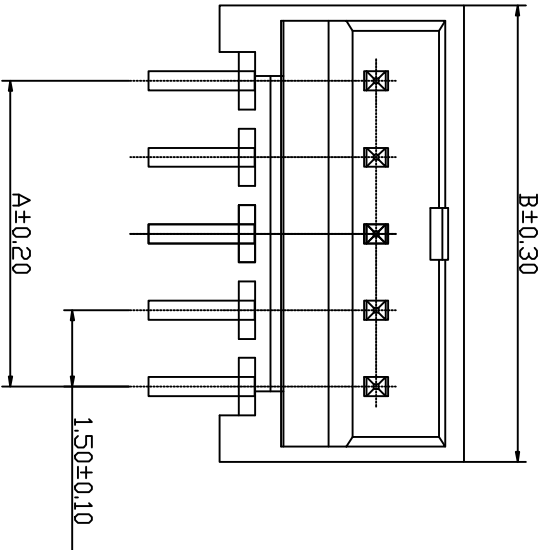

Part No	Dimensions (mm)	
	A	B
W1502SV-02	1.50	4.30
W1502SV-03	3.00	5.80
W1502SV-04	4.50	7.30
W1502SV-05	6.00	8.80
W1502SV-06	7.50	10.30
W1502SV-07	9.00	11.80
W1502SV-08	10.50	13.30
W1502SV-09	12.00	14.80
W1502SV-10	13.50	16.30
W1502SV-11	15.00	17.80
W1502SV-12	16.50	19.30
W1502SV-13	18.00	20.80
W1502SV-14	19.50	22.30
W1502SV-15	21.00	23.80

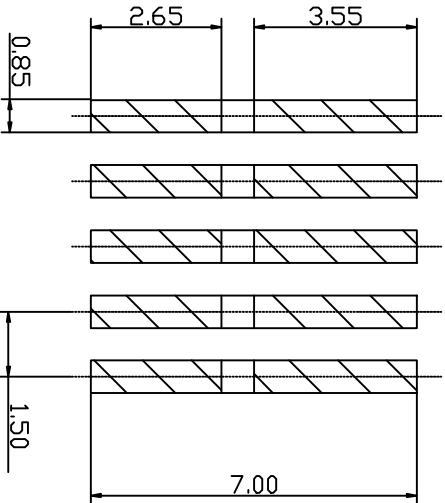

P.C.B LAYOUT

KLIT 深圳市康利通电子科技有限公司

T O C E R A N C E

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图	
CHECKED BY	DATE	SCALE
	2016-04-16	1:1
DRAWN BY	UNIT:mm	VER No
李国常	PART No	SIZE
		A4

W1502SV-NP

4

4

B

C

D

E

F

B

C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-16	李国常





SPECIFICATIONS

- Voltage rating: 350V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃~+85℃
- Contact resistance: 20MΩ max

WAFER

- Part No: W1502SR-NP
- Poles: 02-15
- Material: Nylon 6T UL94V-0
- Ter Material: Phosphor Bronze /Tin-plated

Part No	Dimensions (mm)	
	A	B
W1502SR-02	1.50	4.30
W1502SR-03	3.00	5.80
W1502SR-04	4.50	7.30
W1502SR-05	6.00	8.80
W1502SR-06	7.50	10.30
W1502SR-07	9.00	11.80
W1502SR-08	10.50	13.30
W1502SR-09	12.00	14.80
W1502SR-10	13.50	16.30
W1502SR-11	15.00	17.80
W1502SR-12	16.50	19.30
W1502SR-13	18.00	20.80
W1502SR-14	19.50	22.30
W1502SR-15	21.00	23.80

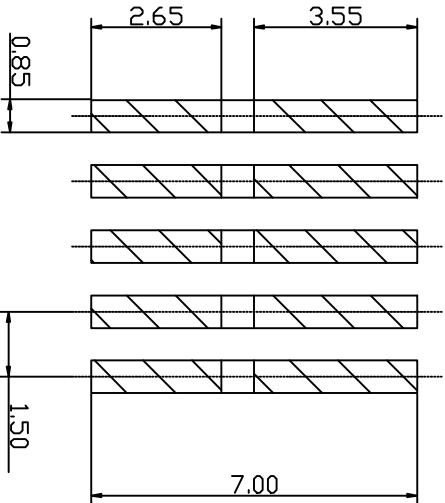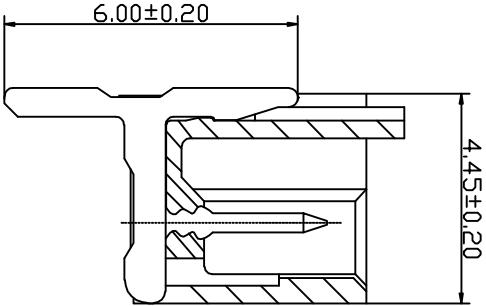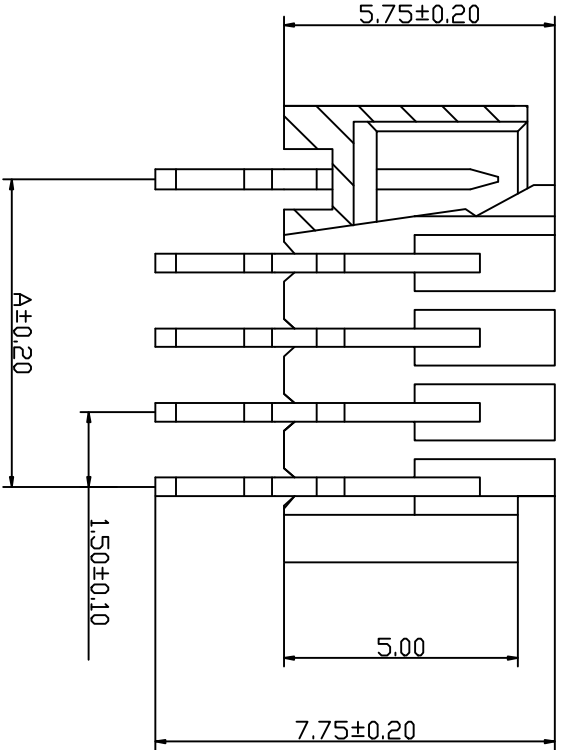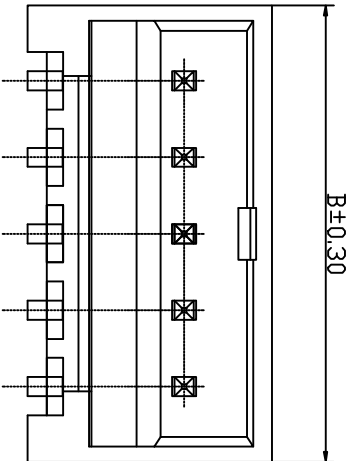

P.C.B LAYOUT



深圳市康利通电子科技有限公司

T O C E R A N C E

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No

SIZE

A

A4

PART No

W1502SR-NP

B

C

D

E

F