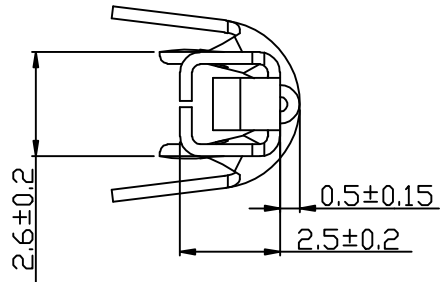
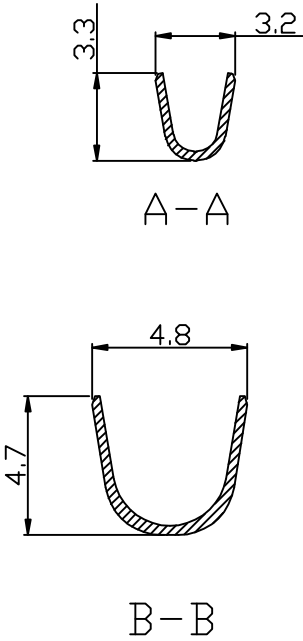
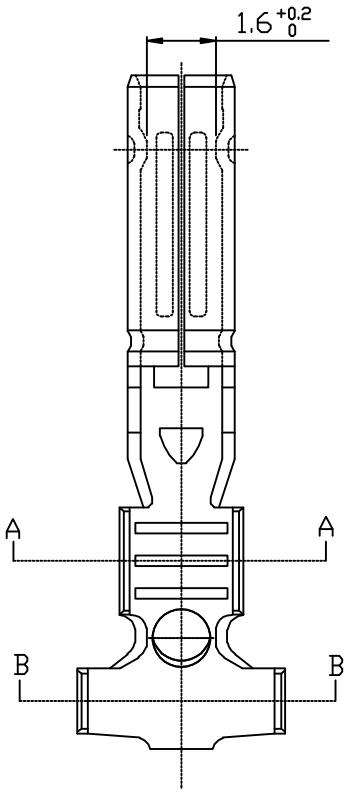
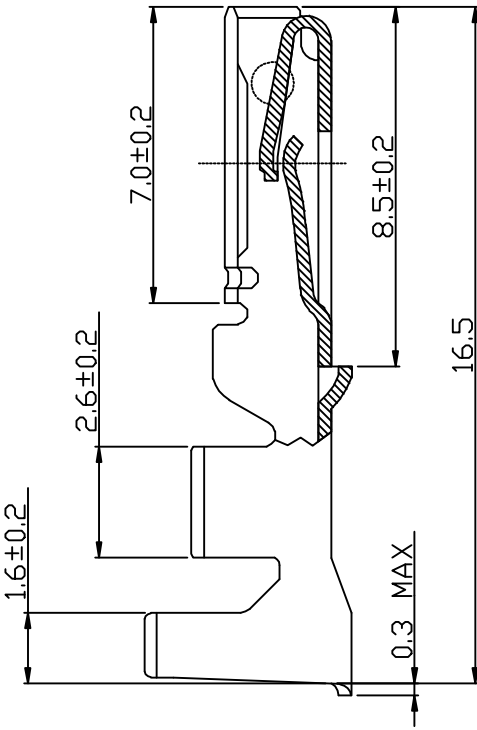


KLT 深圳市康利通电子科技有限公司		产品型号	KF-621-F1.5TS		名 称	检验标准	共1 页																																									
		产品名称	母 端																																													
承认书	工 序	检验标准	品质部	检验项目		技术要求	检验方法																																									
	冲 压			序号	项目	内 容																																										
技术要求 1. 冲制件表面应光洁平整无毛刺及裂痕。 2. 产品弯曲处不得有机械性损伤，切口毛刺<0.2mm 3. 表面镀锡铈或亚光，镀层表面应清洁，均匀一致，无腐蚀现象。 4. 未注尺寸公差均按GB1800-79IT10级 		<table><tr><th colspan="6">未 注 公 差</th></tr><tr><th>尺 寸</th><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th></tr><tr><td>1-6</td><td>0.03</td><td>0.05</td><td>0.08</td><td>0.10</td><td></td></tr><tr><td>6-18</td><td>0.05</td><td>0.08</td><td>0.10</td><td>0.15</td><td>0.20</td></tr><tr><td>18-30</td><td>0.08</td><td>0.10</td><td>0.15</td><td>0.20</td><td>0.25</td></tr><tr><td>30-50</td><td>0.10</td><td>0.15</td><td>0.20</td><td>0.25</td><td>0.30</td></tr><tr><td>50-80</td><td>0.15</td><td>0.20</td><td>0.25</td><td>0.35</td><td>0.50</td></tr></table>	未 注 公 差						尺 寸	A	B	C	D	E	1-6	0.03	0.05	0.08	0.10		6-18	0.05	0.08	0.10	0.15	0.20	18-30	0.08	0.10	0.15	0.20	0.25	30-50	0.10	0.15	0.20	0.25	0.30	50-80	0.15	0.20	0.25	0.35	0.50	1	外观	标志正确清晰，端子应无断裂、毛刺、变形、划伤； 表面镀层应均匀、光亮、无霉斑、发黑、剥层等缺陷。	目视
		未 注 公 差																																														
		尺 寸	A	B	C	D	E																																									
		1-6	0.03	0.05	0.08	0.10																																										
		6-18	0.05	0.08	0.10	0.15	0.20																																									
		18-30	0.08	0.10	0.15	0.20	0.25																																									
		30-50	0.10	0.15	0.20	0.25	0.30																																									
		50-80	0.15	0.20	0.25	0.35	0.50																																									
		2	机械性	产品弯曲部位不得有机械性损伤，不易折断，切口毛刺≤0.2mm	目视																																											
		3	互换性	同一型号，同一规格的端子应能通用，互换、插入手感顺畅，任意两只产品一致性好。	将端子与塑件进行互换扞配检查																																											
4	扞入力 拔出力		拉力检测器																																													
5	固定性	每一接触件在详细规范规定拉力推力作用下不应该从基座中脱落，上下直径间隙0.2~0.3mm，左右间隙0.02~0.1mm，锁扣力≥30N																																														
6	尺寸	应符合左边示意图要求 未注圆角0.3R，未注倒角0.2X45°mm 未注公差尺寸按GB/TB914-92中ST7级	游标卡尺 千分尺																																													
7	使用材料 黄 铜	规 格	数 量																																													
8																																																